


OBSOLETE PRODUCT



Model	1.8V		
Parameter			Units
Output Voltage Setpoint	1.78 – 1.82	Vdc	
Line/Load Regulation	Max	0.1% / 0.2%	% Vo
Output total regulation		1.75 – 1.85	Vdc
Output adjust (note 4)		90-110	%Vo,nom
Remote-sense Comp.		10%	V
Output Ripple & Noise (note 2)	Max	100	mVp-p
Output Current		0 - 20	A
Efficiency (48V, Full load, 25C)	Typ	87%	%
External Capacitance		1,000-10,000	µF
Transient Response (typ) (3)	ΔVo	165	mV
25% step, 1A/µs	Ts	400	µs
Over-voltage trip point (latching)		2.1 – 2.6	V
Over-current trip point (non-latching)	Typ	25	A


All specifications, waveforms, charts at Ta=25C, Vin=48V, unless otherwise specified




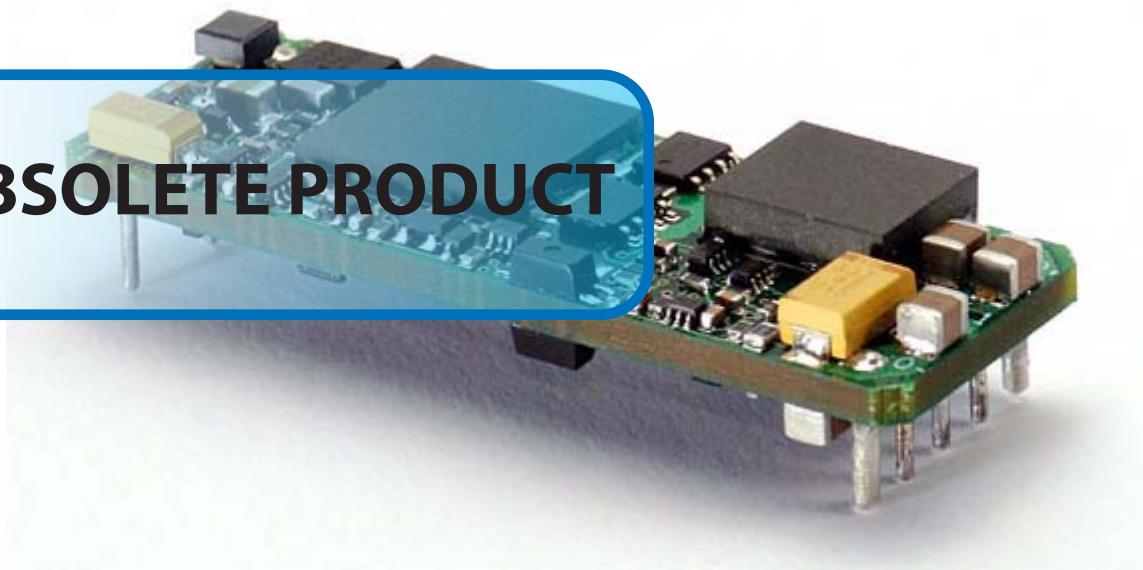


For full details go to
www.murata-ps.com/rohs

www.murata-ps.com/support

Parameter	Conditions	Min.	Typ.	Max.	Units
Input	Input Voltage (Vin)	36	48	75	Vdc
	Reflected Ripple Current	See note (1)	25		'mA p-p
	Inrush Transient		0.2		A ² s
	Input Voltage Transient	100mS 10% duty cycle	100		V
	Undervoltage Lockout	Turn-on	32	35	Vdc
	(non-latching) Turn-off	31	34		Vdc
	Over-voltage lockout	(non-latching) Turn-off	77	81	Vdc
Isolation	Input-Output	1500			Vdc
	Resistance; input-output	10			Mohm
Temperature	Operating Ambient	-40	90		°C
	Storage	-40	125		°C
Protection	Over-Temperature	(non-latching) Measured on PCB		125	°C
Physical Information	Dimensions	2.30" L x 0.82" W x 0.36" H (58.4 x 20.8 x 9.3 mm)			
MTBF(Bellcore)	Calculated at 40C ambient, (Bellcore) Demonstrated at 40C ambient with 90% confidence:	1,000,000 Hrs 2,800,000 Hrs		EHS15/20 Series	
Safety	Complies with IEC/EN/CSA/UL 60950, provides basic insulation, input to output. c-UL-us (US and Canada) recognized, TUV certified (Bauart).				

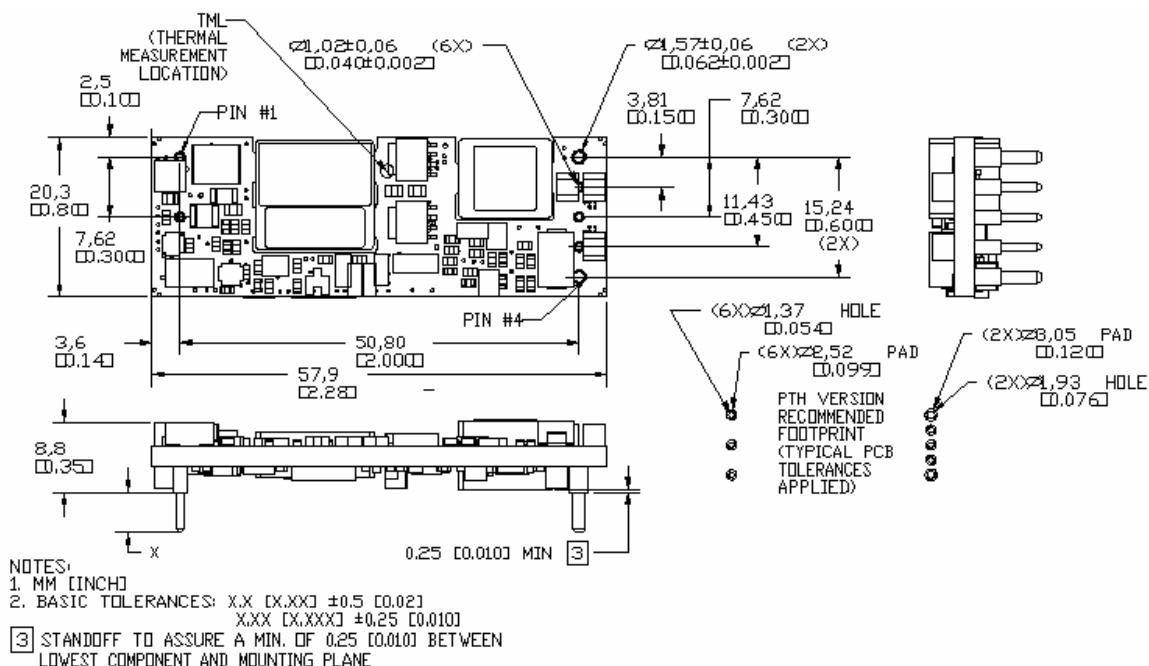

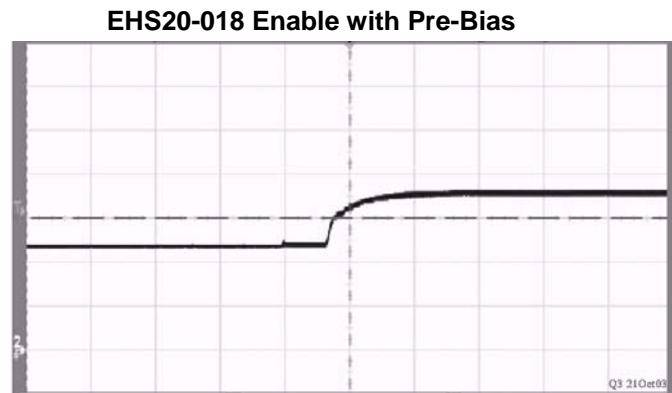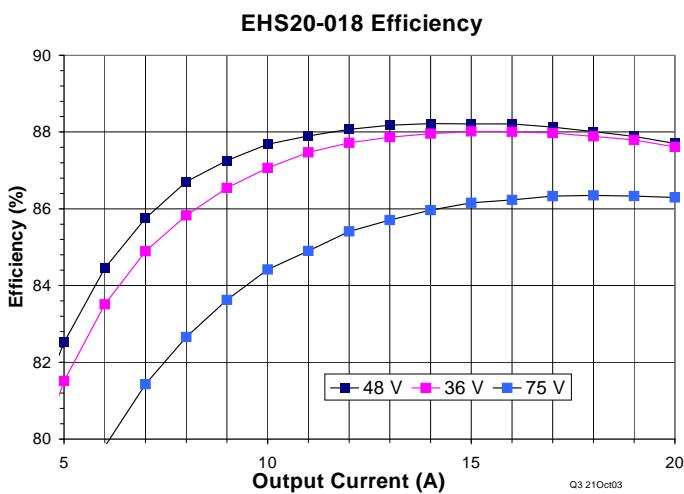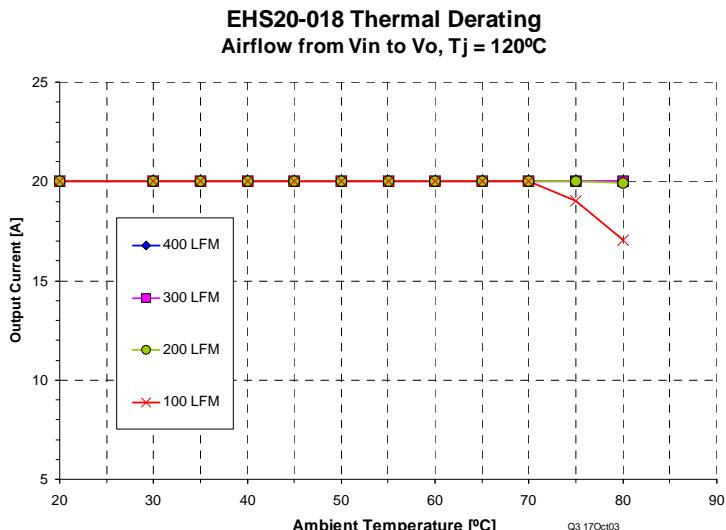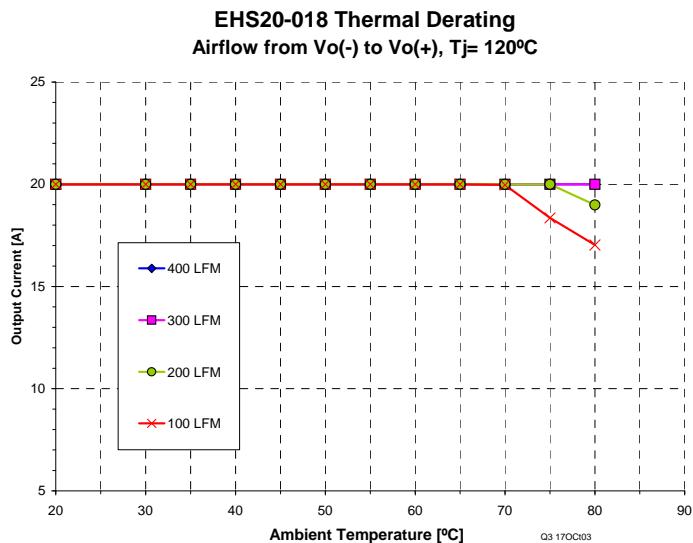

Trim Up/Down Formula : 1.8V model

$$R_{up} := \left[\frac{5.10 V_{nom} (100 + \%)}{1.225 \%} - \frac{510}{\%} - 10.2 \right] K$$

Where


$$\% := \frac{(V_{out} - V_{nom}) 100}{V_{nom}} \quad \text{and, } V_{out} = \text{Target output voltage}$$

$$R_{down}(\%) := \left(\frac{510}{\%} - 10.2 \right) K$$

Where

$$\% := \frac{(V_{nom} - V_{out}) 100}{V_{nom}}$$

EHS20-018 Trim-up and Trim-down Resistance

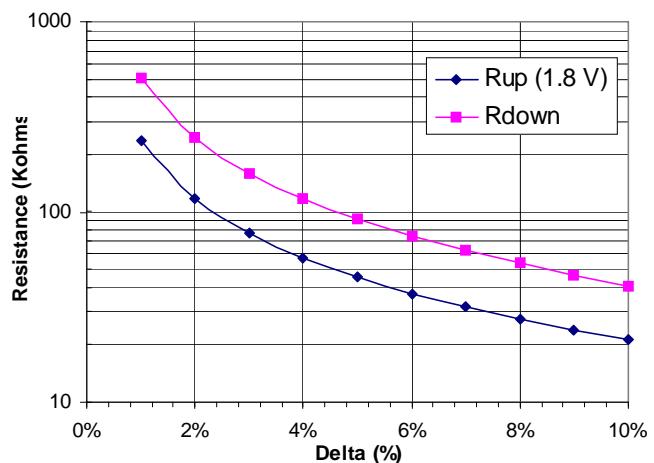


EHS20-018 Startup Sequence from Vin




Top Trace: Vout @ 0.5 V/div.
Bot. Trace: Vin @ 20V/div. (48Vdc)
Horiz. @ 50 ms/div.
Load: 20 A, Turn-on delay: 110ms

EHS20-018 Startup Sequence from Enable

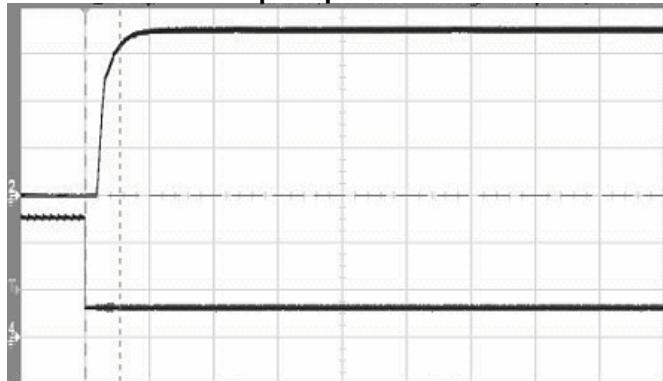


Top Trace: Vout @ 0.5 V/div.
Bot. Trace: Venable @ 2 V/div.
Horiz. @ 5 ms/div. Vin= 36Vdc
Load: 20 A., 10,000 uF, Turn-on delay: 4.8 ms

EHS20-018 Transient Response, 50-75% step 1A/μs

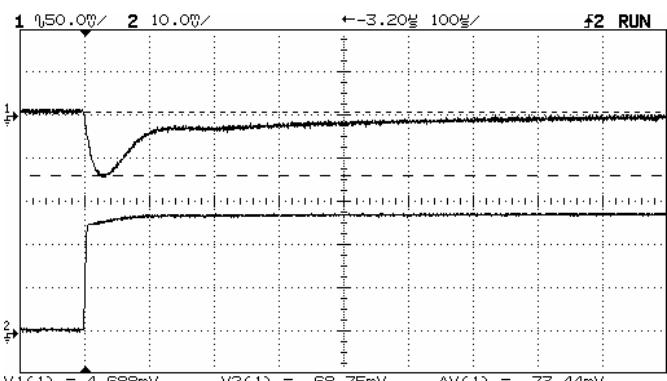


$\Delta V_o = 73.4 \text{ mV}$

EHS20-018 Transient Response, 50- 25% step 1A/μs

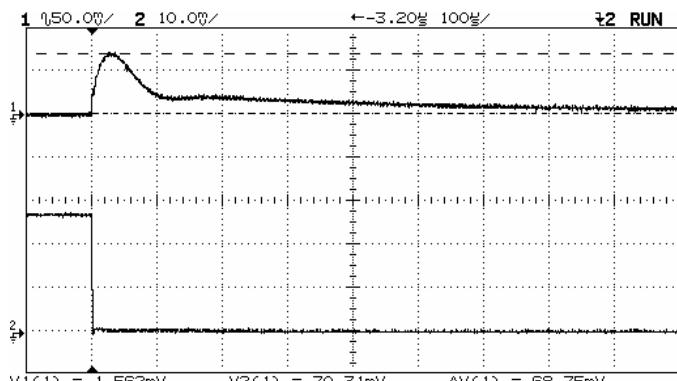


$\Delta V_o = 68.8 \text{ mV}$

EHS20-018 Input Reflected Ripple, Io=20A

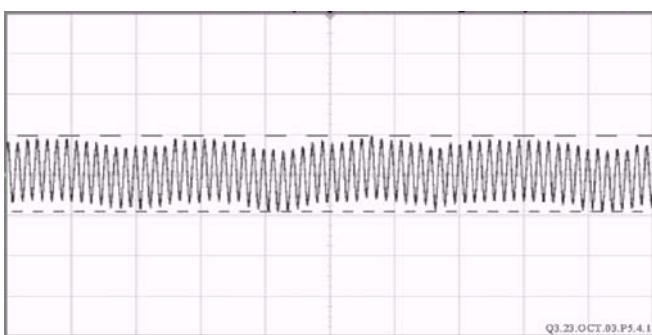


Input Current @ 5 mA/div., 20 us/div. (9.4 mApp)
Input Voltage: 48 Vdc, Load Current: 20 A
Note: see test circuit on following page.

EHS20-018 Output Ripple Voltage, Io=20A

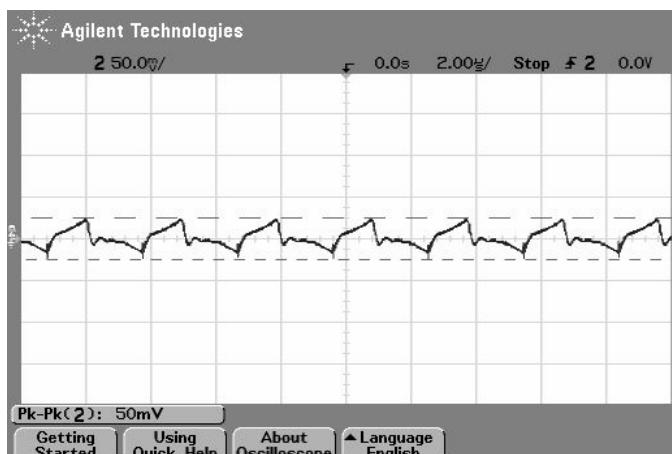

Notes:

1. Input Reflected Ripple is specified when measured with the filter shown below

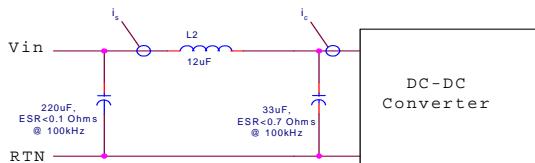

2. Output Ripple and noise is specified when measured with a $10\mu F$ tantalum and a $1\mu F$ ceramic capacitor at the converter output pins
3. Transient response is specified with a $470\mu F$ tantalum capacitor at the output of the converter
4. Trim resistor connection: Rtrim-up connected from $V_{o\ adj}$ to $V_{o(+)}$, Rtrim-down connected from $V_{o\ adj}$ to $V_{o(-)}$.

EHS20-018 Enable Pin Connection Table

	ENABLE POWER SUPPLY	DISABLE POWER SUPPLY
NEGATIVE LOGIC VERSION	$0V < V_{enable} < 0.8V$ (internal pull-up > 50Kohms @ 5V)	$2.5V < V_{enable} < 15V$ (external pull-up > 1Kohms)
POSITIVE LOGIC VERSION	$2.5V < V_{enable} < 15V$ (external pull-up > 1Kohms)	$0V < V_{enable} < 0.8V$ (internal pull-up > 50Kohms @ 5V)

Note: Power Supply has internal pull-up resistor. Enable pin is in a valid "high" state if left open-circuit.


Safety considerations

The EHS series of converters are certified to IEC/EN/CSA/UL 60950. If this product is built into information technology equipment, the installation must comply with the above standard.

An external input fuse (5A to 30A recommended), must be used to meet the above requirements.

The output of the converter [$V_{o(+)} / V_{o(-)}$] is considered to remain within SELV limits when the input to the converter meets SELV or TUV-2 requirements.

The converters and materials meet UL 94V-0 flammability ratings.

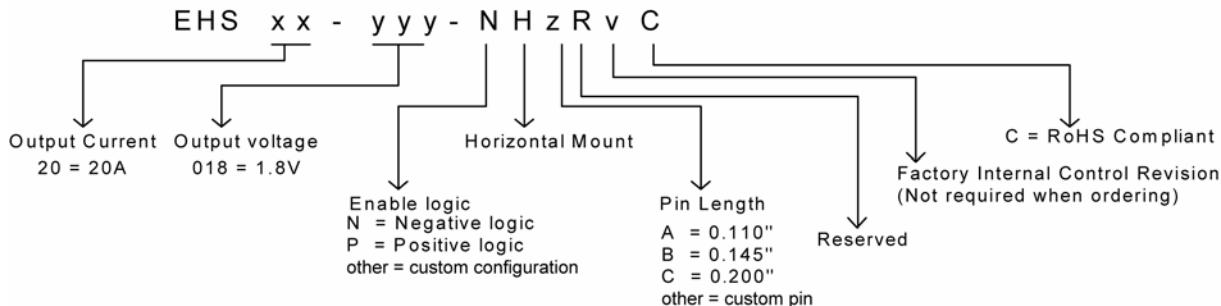Part Number Designations

Murata Power Solutions, Inc.
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
ISO 9001 and 14001 REGISTERED



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#): Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2012 Murata Power Solutions, Inc.

www.murata-ps.com/support