

Type 2DL Wi-Fi® + Bluetooth® Module

NXP IW611 Chipset for 802.11a/b/g/n/ac/ax + Bluetooth 5.3
Regulatory Certification Application Note - Rev. 4.0

- Design Name: Type 2DL
- P/N: LBEE5PL2DL



Table of Contents

1 General Information for Radio Regulatory Certification	7
1.1 Application Model Part Number	7
1.2 Label	7
1.3 Package Label	8
1.4 Country of Origin	9
2 Radio Regulatory Certification Information by Country	9
2.1 FCC	9
2.1.1 Dimensions	10
2.1.2 Pin Layout	11
2.1.3 Operating Conditions	12
2.1.4 Setting RF Power	13
2.1.5 Theory of Operation	27
2.1.6 Integration Instructions	28
2.1.7 About Power Supply (Limited Condition)	31
2.1.8 Trace Antenna and Feed Line	32
2.1.9 Layout Guidance for Microstrip Design and External Antenna	33
2.2 ISCED	37
2.2.1 Antenna List	38
2.2.2 Dimensions	39
2.2.3 Pin Layout	40
2.2.4 Operating Conditions	41
2.2.5 Setting RF Power	42
2.2.6 Theory of Operation	60
2.2.7 Antenna	63
2.2.8 Layout Guidance for Microstrip Design and External Antenna	65
2.2.9 About Power Supply (Limited Condition)	69
2.3 EU	69
2.3.1 Setting RF Power for Europe at 25 °C	70
2.3.2 Theory of Operation	75
2.4 Japan	75
2.4.1 Product Outline	76
2.4.2 Feature	76
2.4.3 Setting RF Power	77
2.4.4 Antenna	84
2.4.5 Notification	88

Revision History.....	90
-----------------------	----

Figures

Figure 1: Labels.....	7
Figure 2: Package (Humidity-proof packaging)	8
Figure 3: Package Label Display Example.....	8
Figure 4: Dimensions and Marking Labels (FCC).....	10
Figure 5: Pin Layout (FCC)	11
Figure 6: EVB Design Used for Testing (FCC)	32
Figure 7: Trace Antenna and Feed Line of The Jig (FCC).....	33
Figure 8: 50 Ω microstrip line and Type2EL_Antenna (FCC)	34
Figure 9: Trace antenna (Type2EL_Antenna) Layout Guide (FCC).....	34
Figure 10: Antenna with u.FL Connector Layout Guide (FCC)	35
Figure 11: Microstrip RF Trace Structure (FCC).....	35
Figure 12: Dimensions and Marking Labels (ISED).....	39
Figure 13: Pin Layout (ISED)	40
Figure 14: EVB Design Used for Testing (ISED)	64
Figure 15: Trace Antenna and Feed Line of The Jig (ISED).....	65
Figure 16: 50 Ω Microstrip Line and Type2EL_Antenna (ISED)	66
Figure 17: Trace Antenna (Type2EL_Antenna) Layout Guide (ISED)	66
Figure 18: Antenna with u.FL Connector Layout Guide (ISED)	67
Figure 19: Microstrip RF Trace Structure (ISED).....	67
Figure 20: Type 2EL Antenna Drawing (Japan)	86
Figure 21: Type 2EL Antenna Appearance (Japan)	87
Figure 22: Antenna Measurement Directions (Japan)	87
Figure 23: Antenna Measurement Result (Japan).....	88

Tables

Table 1: Document Conventions.....	6
Table 2: Marking Labels.....	7
Table 3: Dimension Labels	8
Table 4: Marking Labels (FCC)	10
Table 5: Dimension Labels (FCC)	11
Table 6: Terminal Configurations (FCC)	12
Table 7: Operating Conditions (FCC).....	12
Table 8: WLAN RF Power Setting - 2.4 GHz 802.11 b/g/n (FCC)	13
Table 9: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE20) (FCC)	14
Table 10: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE40) (FCC)	16

Table 11: BT (BR/EDR) / BLE RF Power Setting (FCC).....	17
Table 12: WLAN RF Power Setting - 5 GHz 802.11a (FCC)	17
Table 13: WLAN RF Power Setting - 5 GHz 802.11n (HT20) (FCC)	18
Table 14: WLAN RF Power Setting - 5 GHz 802.11n (HT40) (FCC)	18
Table 15: WLAN RF Power Setting - 5 GHz 802.11ac (VHT20) (FCC)	18
Table 16: WLAN RF Power Setting - 5 GHz 802.11ac (VHT40) (FCC)	18
Table 17: WLAN RF Power Setting - 5 GHz 802.11ac (VHT80) (FCC)	19
Table 18: WLAN RF Power Setting – 5 GHz 802.11ax (HE20) (FCC).....	19
Table 19: WLAN RF Power Setting - 5 GHz 802.11ax (HE40) (FCC)	22
Table 20: Theory of Operation (FCC).....	27
Table 21: Antennas (FCC)	29
Table 22: Power Supply Voltages (FCC)	31
Table 23: Marking Labels (ISED)	39
Table 24: Markings (in Millimeters)	39
Table 25: Terminal Configurations (ISED).....	40
Table 26: Operating Conditions (ISED)	41
Table 27: WLAN RF Power Setting - 2.4 GHz 802.11 b/g/n(HT20/40/ac(VHT20/40) (ISED)	42
Table 28: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE20) (ISED)	43
Table 29: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE40) (ISED)	45
Table 30: BT (BR/EDR) / BLE RF Power Setting (ISED).....	46
Table 31: WLAN RF Power Setting - 5 GHz 802.11a (ISED)	46
Table 32: WLAN RF Power Setting - 5 GHz 802.11n (HT20) (ISED)	47
Table 33: WLAN RF Power Setting - 5 GHz 802.11n (HT40) (ISED)	47
Table 34: WLAN RF Power Setting - 5 GHz 802.11ac (VHT20) (ISED)	47
Table 35: WLAN RF Power Setting – 5 GHz 802.11ac (VHT40) (ISED)	48
Table 36: WLAN RF Power Setting – 5 GHz 802.11ac (VHT80) (ISED)	48
Table 37: WLAN RF Power Setting - 5 GHz 802.11ax (HE20) (ISED)	49
Table 38: WLAN RF Power Setting - 5 GHz 802.11ax (HE40) (ISED)	53
Table 39: WLAN RF Power Setting - 5 GHz 802.11ax (HE80) (ISED)	58
Table 40: Theory of Operation (ISED).....	60
Table 41: Antenna (ISED).....	63
Table 42: Power Supply Voltages (ISED).....	69
Table 43: WLAN RF Power Setting - 2.4 GHz (EU)	70
Table 44: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE20) (EU).....	70
Table 45: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE40) (EU).....	71
Table 46: BT (BR/EDR / BLE RF Power Setting (EU)	71
Table 47: WLAN RF Power Setting - 5 GHz 802.11a/n/ac for Channels 36 ~ 140 (EU)	71
Table 48: WLAN RF Power Setting - 5 GHz 802.11ax (HE20) for Channels 36 ~ 140 (EU)	72
Table 49: WLAN RF Power Setting - 5 GHz 802.11ax (HE40) for Channels 38 ~ 134 (EU)	72
Table 50: WLAN RF Power Setting - 5 GHz 802.11ax (HE80) for Channels 42 ~ 122 (EU)	73

Table 51: WLAN RF Power Setting - 5 GHz 802.11 a/n/ac for Channels 149 ~ 169 (EU)	73
Table 52: WLAN RF Power Setting - 5 GHz 802.11ax for Channels 149 ~ 169 (EU)	74
Table 53: Theory of Operation (EU)	75
Table 54: WLAN RF Power Setting - 11b SS Technique (Direct Sequence Spread Spectrum) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)	77
Table 55: WLAN RF Power Setting - 11g Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)	77
Table 56: WLAN RF Power Setting - 11n HT20 Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)	77
Table 57: WLAN RF Power Setting - 11n HT40 Modulation (OFDM) - 2422 MHz ~ 2462 MHz (5 MHz interval 9 Waves) (Japan)	78
Table 58: WLAN RF Power Setting - 11ac VHT20 Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)	78
Table 59: WLAN RF Power Setting - 11ac VHT40 Modulation (OFDM) - 2422 MHz ~ 2462 MHz (5 MHz interval 9 Waves) (Japan)	78
Table 60: 11ax HE20 Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)	79
Table 61: 11ax HE40 Modulation (OFDM) - 2422 MHz ~ 2462 MHz (5 MHz interval 9 Waves) (Japan)	79
Table 62: BR/EDR Modulation (Spread Spectrum Frequency Hopping System 1600 hops/sec) - 2441 MHz (Japan)	80
Table 63: BLE Modulation (Spread Spectrum Frequency Hopping System) - 2402 MHz (2 MHz Interval 40 Waves) (Japan)	80
Table 64: 11a Modulation (OFDM) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)	80
Table 65: 11n HT20 Modulation (OFDM) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)	81
Table 66: 11n HT40 Modulation (OFDM) 5190 MHz ~ 5310 MHz (40 MHz Interval 4 Waves) 5510 MHz ~ 5710 MHz (40 MHz Interval 6 Waves) (Japan)	81
Table 67: 11ac VHT20 Modulation (OFDM) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)	81
Table 68: 11 ac VHT40 Modulation (OFDM) - 5190 MHz ~ 5310 MHz (40 MHz Interval 4 Waves), 5510 MHz ~ 5710 MHz (40 MHz Interval 6 Waves) (Japan)	82
Table 69: 11ac VHT80 Modulation (OFDM) - 5210 MHz, 5290 MHz (80 MHz Interval 2 Waves), 5530 MHz ~ 5690 MHz (80 MHz Interval 3 Waves) (Japan)	82
Table 70: 11ax HE20 Modulation (OFDMA) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)	82
Table 71: 11ax HE40 Modulation (OFDMA) - 5190 MHz ~ 5310 MHz (40 MHz Interval 4 Waves), 5510 MHz ~ 5710 MHz (40 MHz Interval 6 Waves) (Japan)	83

Table 72: 11ax HE80 Modulation (OFDMA) - 5210 MHz, 5290 MHz (80 MHz Interval 2 Waves), 5530 MHz ~ 5690 MHz (80 MHz Interval 3 Waves) (Japan)	83
Table 73: Theory of Operation (Japan)	84
Table 74: Antenna (Japan)	84

About This Document

Murata's Type 2DL is a small and very high-performance module based on NXP IW6111 combo chipset, supporting IEEE 802.11a/b/g/n/ac/ax + Bluetooth 5.3 BR/EDR/LE. This application note provides Radio Law Certification user manual. It is designed to ensure that module manufacturers correctly communicate the necessary information to host manufacturers that incorporate their modules. Refer to [Type 2DL Datasheet](#)  for module specification.

Audience & Purpose

The intended audience of this document are the manufacturers and host manufacture that will integrate this module to their modules.

Document Conventions

Table 1 describes the document conventions.

Table 1: Document Conventions

Conventions	Description
	Warning Note Indicates very important note. Users are strongly recommended to review.
	Info Note Intended for informational purposes. Users should review.
	Menu Reference Indicates menu navigation instructions. Example: Insert → Tables → Quick Tables → Save Selection to Gallery 
	External Hyperlink This symbol indicates a hyperlink to an external document or website. Example: Murata  Click on the text to open the external link.
	Internal Hyperlink This symbol indicates a hyperlink within the document. Example: Operating Conditions  Click on the text to open the link.
<code>Console input/output or code snippet</code>	Console I/O or Code Snippet This text Style denotes console input/output or a code snippet.
<code># Console I/O comment // Code snippet comment</code>	Console I/O or Code Snippet Comment This text Style denotes a console input/output or code snippet comment. • Console I/O comment (preceded by "#") is for informational purposes only and does not denote actual console input/output. • Code Snippet comment (preceded by "//") may exist in the original code.

1 General Information for Radio Regulatory Certification

This section contains the following topics:

- Application model part number
- Label
- Package Label
- Country of Origin

1.1 Application Model Part Number

Application model part number: **LBEE5PL2DL**

1.2 Label

Figure 1 shows the module label. **Table 2** and **Table 3** describes the labels.

Figure 1: Labels



Table 2: Marking Labels

Marking Label	Meaning
A	Module type
B	Inspection number
C	Serial number
D	Murata logo
E	Pin1 marking
F	2D code

Table 3: Dimension Labels

L	W	T
8.8 mm	7.7 mm	1.3 mm



Since there is no space to describe the notational requirements of each country, we are applying for the notational requirements to be posted in the manual or package.

1.3 Package Label

Figure 2 shows the package and **Figure 3** shows an example of the package label.

Figure 2: Package (Humidity-proof packaging)


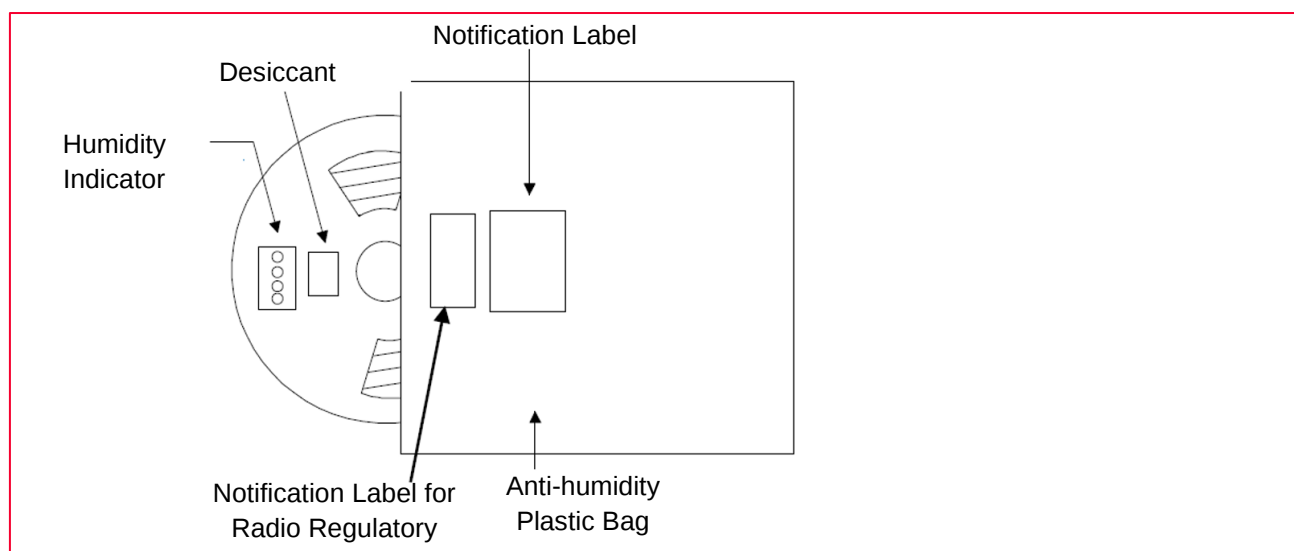


Figure 3: Package Label Display Example

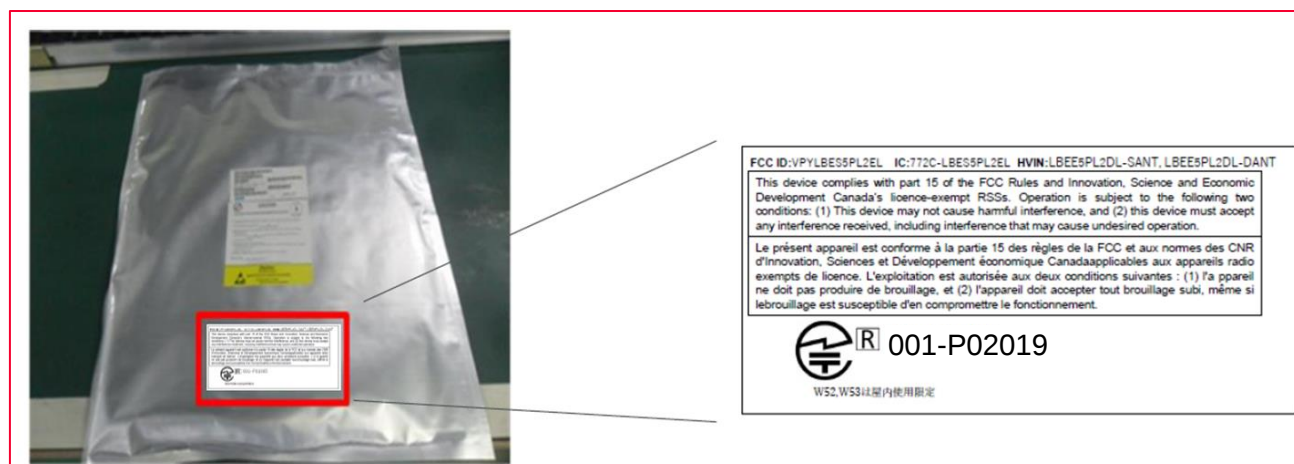

The package label may be attached on one side only.

1.4 Country of Origin

China

SHENZHEN MURATA TECHNOLOGY CO., LTD.



Some countries have applied for certification in two countries, China, and Japan, in preparation for future factory changes, but the production site in the delivery specifications is the above-mentioned factory in China.

2 Radio Regulatory Certification Information by Country

This section contains the following country/region specific information:

- <FCC>
- <ISED>
- <EU>
- <Japan>

2.1 FCC

Model Name: LBEE5PL2DL

FCC ID: VPYLBES5PL2EL

This module is not sold to general end users directly. Therefore, there is no user manual of module. For the details about this module, please refer to the specification sheet of module. This module should be installed in the host device according to the interface specification (installation procedure)

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the end user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as shown in User manual.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

FCC CAUTION: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This device complies with below part 15 of the FCC Rules.

- Part 15 Subpart C
- Part 15 Subpart E

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual. If the FCC ID is not visible when the module is installed inside another device, then the module is installed must also display a label referring to the enclosed module.

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

This module is designed for mounting inside of the end product by us professionally. Therefore, it complies with the antenna and transmission system requirements of §15.203.

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual. If the FCC ID is not visible when the module is installed inside another device, then the module is installed must also display a label referring to the enclosed module.

2.1.1 Dimensions

Figure 4 shows the dimensions and marking labels for FCC.

Figure 4: Dimensions and Marking Labels (FCC)

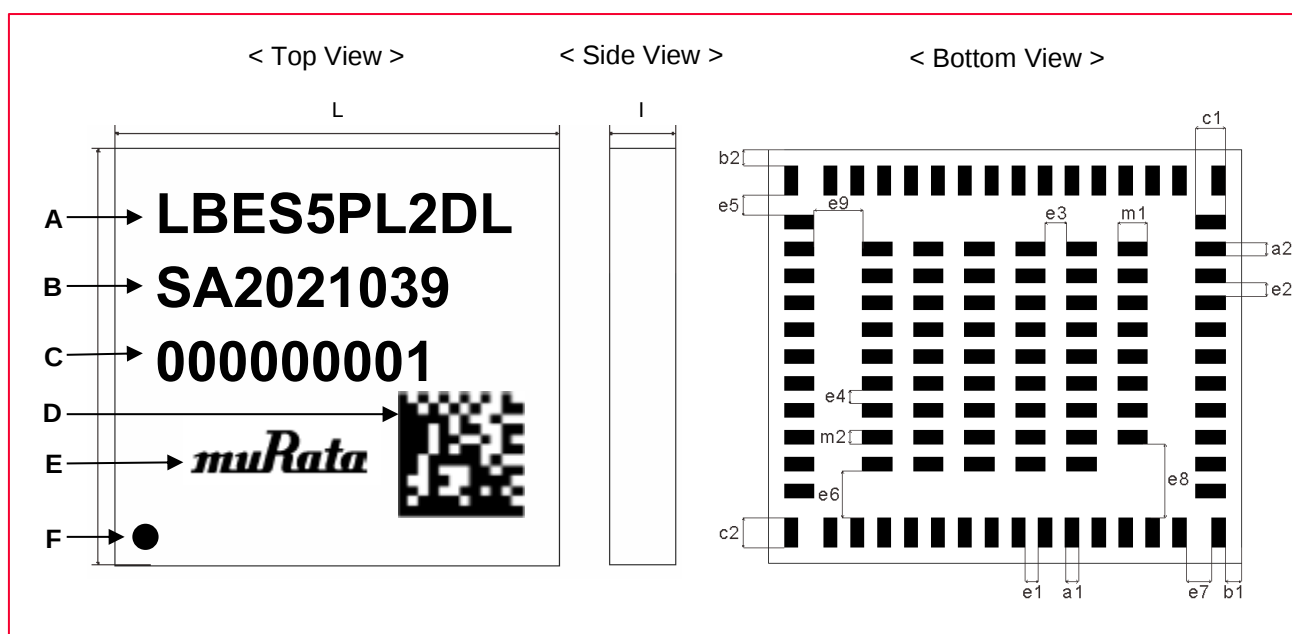


Table 4 describes the marking labels.

Table 4: Marking Labels (FCC)

Marking	Meaning
A	Module type
B	Inspection number
C	Serial number
D	2D code
E	muRata logo
F	Pin1 marking

Table 5 describes the dimension labels.

Table 5: Dimension Labels (FCC)

Mark	Dimensions (mm)	Mark	Dimensions (mm)	Mark	Dimensions (mm)
L	8.8 +/- 0.2	W	7.7 +/- 0.2		
T	1.3 maximum	T1	0.04 typical (Bump)		
a1	0.25 +/- 0.1	a2	0.25 +/- 0.1	b1	0.3 +/- 0.2
b2	0.3 +/- 0.2	c1	0.55 +/- 0.1	c2	0.55 +/- 0.1
e1	0.25 +/- 0.1	e2	0.25 +/- 0.1	e3	0.4 +/- 0.1
e4	0.25 +/- 0.1	e5	0.375 +/- 0.1	e6	0.875 +/- 0.1
e7	0.475 +/- 0.1	e8	1.375 +/- 0.1	e9	0.9 +/- 0.1
m1	0.55 +/- 0.1	m2	0.25 +/- 0.1		

2.1.2 Pin Layout

Figure 5 shows the pin layout.

Figure 5: Pin Layout (FCC)

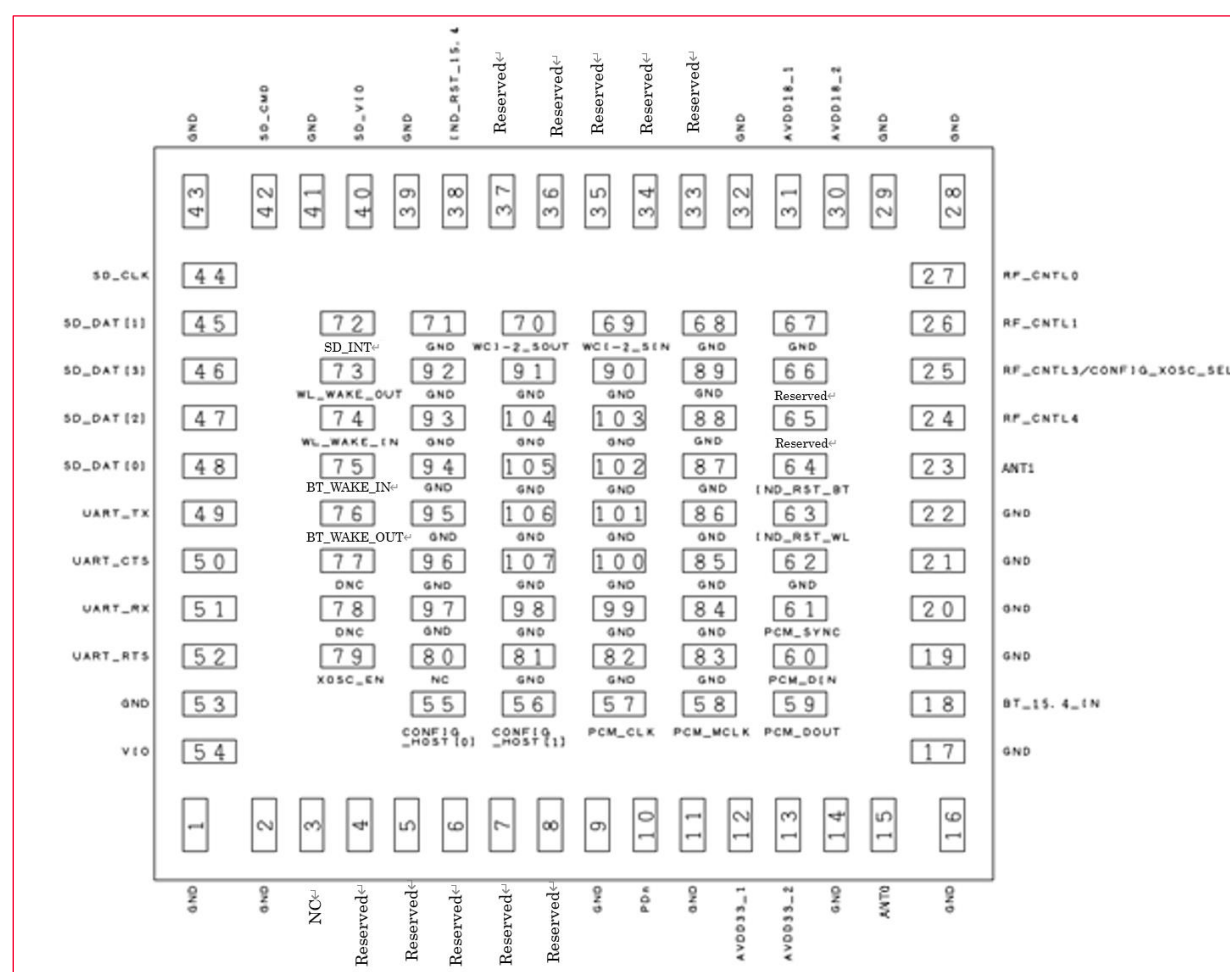


Table 6 describes the pins.

Table 6: Terminal Configurations (FCC)

No.	Terminal Name	No.	Terminal Name	No.	Terminal Name
1	GND	29	GND	57	PCM_CLK
2	GND	30	AVDD18_2	58	PCM_MCLK
3	NC	31	AVDD18_1	59	PCM_DOUT
4	Reserved	32	GND	60	PCM_DIN
5	Reserved	33	Reserved	61	PCM_SYNC
6	Reserved	34	Reserved	62	GND
7	Reserved	35	Reserved	63	IND_RST_WL
8	Reserved	36	Reserved	64	IND_RST_BT
9	GND	37	Reserved	65	Reserved
10	PDn	38	Reserved	66	Reserved
11	GND	39	GND	67	GND
12	AVDD33_1	40	SD_VIO	68	GND
13	AVDD33_2	41	GND	69	WCI-2_SIN
14	GND	42	SD_CMD	70	WCI-2_SOUT
15	ANT0	43	GND	71	GND
16	GND	44	SD_CLK	72	SD_INT
17	GND	45	SD_DAT[1]	73	WL_WAKE_OUT
18	BT_IN	46	SD_DAT[3]	74	WL_WAKE_IN
19	GND	47	SD_DAT[2]	75	BT_WAKE_IN
20	GND	48	SD_DAT[0]	76	BT_WAKE_OUT
21	GND	49	UART_TX	77	NC
22	GND	50	UART_CTS	78	NC
23	ANT1	51	UART_RX	79	XOSC_EN
24	RF_CNTL4	52	UART_RTS	80	NC
25	RF_CNTL3/CONFIG_XOSC_SEL	53	GND	81-107	GND
26	RF_CNTL1	54	VIO		
27	RF_CNTL0	55	CONFIG_HOST[0]		
28	GND	56	CONFIG_HOST[1]		

2.1.3 Operating Conditions

Table 7 describes the operating conditions.

Table 7: Operating Conditions (FCC)

Parameter		Minimum	Typical	Maximum	Unit
Operating Temperature		-40	25	85	°C
Supply Voltage	AVDD33	3.14	3.3	3.46	V
	AVDD18	1.71	1.8	1.89	V
	VIO	1.71	1.8	1.89	V
	SD_VIO	3.14	3.3	3.46	V



VIO, SD_VIO have two systems, 1.8V system and 3.3V system. However, these do not affect the RF characteristics.

2.1.4 Setting RF Power

This section describes the RF power settings.

2.1.4.1 RF Power Setting for 2.4 GHz WLAN

RF Power Settings for 2.4 GHz WLAN are described in the following tables.

Table 8: WLAN RF Power Setting - 2.4 GHz 802.11 b/g/n (FCC)

Mode	Rate/MCS index	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11b	All Rate	1	16.0 ± 2.0
		2, 10, 11	17.0 ± 2.0
		3~9	18.0 ± 2.0
IEEE 802.11g	All rate	1, 11	12.0 ± 2.0
		2	13.0 ± 2.0
		3, 9, 10	14.0 ± 2.0
		4, 5	15.0 ± 2.0
		6 ~ 8	16.0 ± 2.0
IEEE 802.11n (HT20)	All MCS index	1, 11	11.0 ± 2.0
		2	12.0 ± 2.0
		3, 9	14.0 ± 2.0
		4 ~ 8	15.0 ± 2.0
		10	13.0 ± 2.0
IEEE 802.11n (HT40)	All MCS index	3, 8, 9	10.0 ± 2.0
		4, 5, 6, 7	11.0 ± 2.0
IEEE 802.11ac (VHT20)	All MCS index	1, 11	11.0 ± 2.0
		2	12.0 ± 2.0
		3, 9	14.0 ± 2.0
		4 ~ 8	15.0 ± 2.0
		10	13.0 ± 2.0
IEEE 802.11ac (VHT40)	All MCS index	3, 8, 9	10.0 ± 2.0
		4, 5, 6, 7	11.0 ± 2.0

Table 9: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE20) (FCC)

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	1	MCS0 ~ MCS7	SU	11.0 ±2.0		
					242 tone (Full tone)	10.0 ±2.0
					26 tone	11.0 ±2.0
					52 tone	11.0 ±2.0
					106 tone	11.0 ±2.0
		MCS8 ~ MCS11	SU	11.0 ±2.0		
					242 tone (Full tone)	10.0 ±2.0
					26 tone	11.0 ±2.0
					52 tone	11.0 ±2.0
					106 tone	11.0 ±2.0
	2	MCS0 ~ MCS11	SU	12.0 ±2.0		
					242 tone (Full tone)	12.0 ±2.0
					26 tone	12.0 ±2.0
					52 tone	12.0 ±2.0
					106 tone	12.0 ±2.0
	3	MCS0 ~ MCS7	SU	14.0 ±2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	4	MCS0 ~ MCS7	SU	15.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	5, 6	MCS0 ~ MCS7	SU	15.0 ± 2.0		

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	5, 6	MCS0 ~ MCS7			242 tone (Full tone)	15.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	7, 8	MCS0 ~ MCS7	SU	15.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	9	MCS0 ~ MCS7	SU	14.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full one)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	10	MCS0 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	12.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	11	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					242 tone (Full tone)	11.0 ± 2.0
					26 tone	11.0 ± 2.0

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	11	MCS0 ~ MCS11			52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0

Table 10: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE40) (FCC)

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	3	MCS0 ~ MCS11	SU	10.0 ± 2.0		
					484 tone (Full tone)	6.0 ± 2.0
					26 tone	9.0 ± 2.0
					52 tone	10.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0
	4	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	8.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	5	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	10.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	6	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	11.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	7	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	11.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	8	MCS0 ~ MCS11	SU	10.0 ± 2.0		

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	8	MCS0 ~ MCS11			484 tone (Full tone)	8.0 ± 2.0
					26 tone	10.0 ± 2.0
					52 tone	10.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0
	9	MCS0 ~ MCS7	SU	10.0 ± 2.0		
					484 tone (Full tone)	7.0 ± 2.0
					26 tone	10.0 ± 2.0
					52 tone	10.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0

2.1.4.2 RF Power Setting for BT (BR/EDR) / BLE

RF power settings for BT (BR/EDR) and BLE are described in .

Table 11: BT (BR/EDR) / BLE RF Power Setting (FCC)

Mode	Channel	Maximum Tune Up Tolerance (dBm)
BR	NA	13.0 ± 3.0
EDR	NA	5.0 ± 3.0
LE	NA	13.0 ± 3.0
LE 2 Mbps	NA	13.0 ± 3.0

2.1.4.3 RF Power Setting for 5 GHz WLAN

RF power settings for 5 GHz WLAN are described in the following tables.

Table 12: WLAN RF Power Setting - 5 GHz 802.11a (FCC)

Mode	Rate	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11a	All Rate	W52/W53	36, 40, 60, 64	14.0 ± 2.0
	All Rate	W52/W53	44, 48, 52, 56	16.0 ± 2.0
	All Rate	W56	100, 104	14.0 ± 2.0
	All Rate	W56	108 ~ 136, 144	16.0 ± 2.0
	All Rate	W56	140	13.0 ± 2.0
	All Rate	W58	161, 165	14.0 ± 2.0
	All Rate	W58	149 ~ 157	16.0 ± 2.0

Table 13: WLAN RF Power Setting - 5 GHz 802.11n (HT20) (FCC)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11n (HT20)	All MCS Index	W52/W53	36, 40, 60, 64	11.0 ± 2.0
	All MCS Index	W52/W53	44 ~ 56	14.0 ± 2.0
	All MCS Index	W56	100, 104	11.0 ± 2.0
	All MCS Index	W56	108 ~ 136, 144	14.0 ± 2.0
	All MCS Index	W56	140	10.0 ± 2.0
	All MCS Index	W58	161, 165	11.0 ± 2.0
	All MCS Index	W58	149 ~ 157	14.0 ± 2.0

Table 14: WLAN RF Power Setting - 5 GHz 802.11n (HT40) (FCC)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11n (HT40)	All MCS index	W52/W53	38	10.0 ± 2.0
	All MCS Index	W52/W53	62	11.0 ± 2.0
	All MCS Index	W52/W53	46, 54	14.0 ± 2.0
	All MCS Index	W56	102	10.0 ± 2.0
	All MCS Index	W56	110 ~ 126, 142	14.0 ± 2.0
	All MCS Index	W56	134	13.0 ± 2.0
	All MCS Index	W58	151	14.0 ± 2.0
	All MCS Index	W58	159	11.0 ± 2.0

Table 15: WLAN RF Power Setting - 5 GHz 802.11ac (VHT20) (FCC)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT20)	All MCS index	W52/W53	36, 40, 60, 64	11.0 ± 2.0
	All MCS index	W52/W53	44 ~ 56	14.0 ± 2.0
	All MCS index	W56	100, 104	11.0 ± 2.0
	All MCS index	W56	108 ~ 136, 144	14.0 ± 2.0
	All MCS index	W56	140	10.0 ± 2.0
	All MCS index	W58	149 ~ 157	14.0 ± 2.0
	All MCS index	W58	161, 165	11.0 ± 2.0

Table 16: WLAN RF Power Setting - 5 GHz 802.11ac (VHT40) (FCC)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT40)	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W52/W53	38	10.0 ± 2.0
	MCS8,MCS9	W52/W53	38	10.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W52/W53	62	11.0 ± 2.0
	MCS8,MCS9	W52/W53	62	11.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W52/W53	46, 54	14.0 ± 2.0
	MCS8,MCS9	W52/W53	46, 54	12.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W56	102	10.0 ± 2.0

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT40)	MCS8,MCS9	W56	102	10.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W56	110 ~ 126, 142	14.0 ± 2.0
	MCS8,MCS9	W56	110 ~ 126, 142	12.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W56	134	13.0 ± 2.0
	MCS8,MCS9	W56	134	12.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W58	159	11.0 ± 2.0
	MCS8,MCS9	W58	159	11.0 ± 2.0
	MCS0,MCS1,MCS2,MCS3, MCS4,MCS5,MCS6,MCS7	W58	151	14.0 ± 2.0
	MCS8,MCS9	W58	151	12.0 ± 2.0

Table 17: WLAN RF Power Setting - 5 GHz 802.11ac (VHT80) (FCC)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT80)	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	42	10.0 ± 2.0
	MCS8, MCS9	W52/W3	42	10.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	58	11.0 ± 2.0
	MCS8, MCS9	W52/W3	58	11.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	106	7.0 ± 2.0
	MCS8, MCS9	W6	106	7.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	122, 138	14.0 ± 2.0
	MCS8, MCS9	W56	122, 138	12.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	155	9.0 ± 2.0
	MCS8, MCS9	W58	155	9.0 ± 2.0

Table 18: WLAN RF Power Setting – 5 GHz 802.11ax (HE20) (FCC)

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	36, 40, 60, 64	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	36, 40, 60, 64	MCS8, MCS9	W52/W53	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	44 ~ 56	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	100, 104	MCS0 ~ MCS9	W56	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	108 ~ 136	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	140	MCS0 ~ MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	7.0 ± 2.0
	144	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56			52 tone	10.0 ± 2.0
				SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	161, 165	MCS0 ~ MCS9	W58	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W58	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	149 ~ 157	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W58	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
		MCS10, MCS11	W58	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0

Table 19: WLAN RF Power Setting - 5 GHz 802.11ax (HE40) (FCC)

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	38	MCS0 ~ MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	7.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	46, 54	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	62	MCS0 ~ MCS9	W52/W53	SU	11.0 ± 2.0		
						484 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	102	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	10.0 ± 2.0		
						484 tone (Full tone)	3.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	8.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	102	MCS8, MCS9, MCS10, MCS11	W56	SU	10.0 ± 2.0		
						484 tone (Full tone)	3.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	8.0 ± 2.0
	110 ~ 126	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0		
						484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	134	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	13.0 ± 2.0		
						484 tone (Full tone)	13.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	13.0 ± 2.0
						106 tone	13.0 ± 2.0
						242 tone	12.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	134	MCS10, MCS11	W56	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	142	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0		
						484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	151	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	SU	14.0 ± 2.0		
						484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W58	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	151	MCS10, MCS11	W58	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	159	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	SU	11.0 ± 2.0		
						484 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
		MCS8, MCS9	W58	SU	11.0 ± 2.0		
						484 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
		MCS10, MCS11	W58	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0

2.1.5

2.1.5 Theory of Operation

Table 20 describes the theory of operation.

Table 20: Theory of Operation (FCC)

Frequency of Operation			Scan	Ad hoc Mode
2.4 GHz	11b/g/n/ac/ax (BW20)	2412-2462 MHz	Active	Yes
	11n/ac/ax (BW40)	2422-2452 MHz	Active	Yes
	BT	2402-2480 MHz	N/A	N/A
	BLE	2402-2480 MHz	N/A	N/A
W52	11a/n/ac/ax (BW20)	5180-5240 MHz	Active	Yes
	11n/ac/ax (BW40)	5190-5230 MHz	Active	Yes
	11ac/ax (BW80)	5210 MHz	Active	Yes
W53	11a/n/ac/ax (BW20)	5260-5320 MHz	Passive	No
	11n/ac/ax (BW40)	5270-5310 MHz	Passive	No
	11ac/ax (BW80)	5290 MHz	Passive	No
W56	11a/n/ac/ax (BW20)	5500-5720 MHz*	Passive	No
	11n/ac/ax (BW40)	5510-5710 MHz*	Passive	No
	11ac/ax (BW80)	5530-5690 MHz*	Passive	No
W58	11a/n/ac/ax (BW20)	5745-5825 MHz	Active	Yes
	11n/ac/ax (BW40)	5755-5795 MHz	Active	Yes
	11ac/ax (BW80)	5775 MHz	Active	Yes

2.1.6 Integration Instructions

This manual is based on KDB 996369. It is designed to ensure that module manufacturers correctly communicate the necessary information to host manufacturers that incorporate their modules.

1. General: Applicable

Sections 2 through 10 describe the items that must be provided in the integration instructions for host product manufacturers (e.g., OEM instruction manual) to use when integrating a module in a host product. This Modular transmitter applicant (muRata) should include information in their instructions for all these items indicating clearly when they are not applicable.

2. List of Applicable FCC Rules: Applicable

This device complies with below part 15 of FCC Rules.

- Part 15 Subpart C
- Part 15 Subpart E

3. Summarize the Specific Operational Use Conditions: Applicable

This module is designed for mounting inside of the end product by us professionally. Therefore, it complies with the antenna and transmission system requirements of §15.203.

4. Limited Module Procedures: Applicable

This module needs to supply a regulated voltage from host device.

Since there is no space which indicates FCC ID on this module, FCC ID is indicated in a manual. If the FCC ID is not visible when the module is installed inside another device, then the module is installed must also display a label referring to the enclosed module.

5. Trace Antenna Designs: Applicable

Please perform the Trace antenna design that followed the specifications of the antenna. The concrete contents of a check are the following three points.

1. It is the same type as the antenna type of antenna specifications.
Confirm the same size as the Gerber file.
2. An antenna gain is lower than a gain given in antenna specifications.
Measure the gain, and confirm the peak gain is less than the application value.
3. The emission level is not getting worse.
Measure the spurious and confirm degradation of less than 3dB than spurious value of worst of report used for the application. However it is spurious defined below.

Please send those reports to Murata. And please refer to the Antenna in Section 7.

6. RF Exposure Considerations: Applicable

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines. This equipment should be installed and operated keeping the radiator at least 20 cm or more away from person's body.

It is necessary to take a SAR test with your set mounting this module (except to use only Bluetooth). Class II permissive change application is necessary using the SAR report. Please contact Murata. And an application for a Class II permissive change from a Mobile equipment to a Portable equipment is also required.



1. **Portable equipment:** Equipment for which the spaces between human body and antenna are used within 20 cm.
2. **Mobile equipment:** Equipment used at position in which the spaces between human body and antenna exceeded 20 cm.

7. Antennas: Applicable

Table 21 shows the applicable antennas.

Table 21: Antennas (FCC)

No.	Part number	Vendor	Peak Gain (dBi)		Type	Connector
			2.4 GHz	5 GHz		
1	146153	Molex	3.2	4.25	Dipole	u.FL
2	219611	Molex	2.67	3.67	Dipole	u.FL
3	WT32D1-KX	Unictron	3.0	4.0	Dipole	u.FL
4	W24P-U	Inventek	3.2	N/A	Dipole	u.FL
5	Type2EL_Antenna	Murata	3.6	4.6	Monopole	Trace



No.4 W24P-U can only be used at 2.4 GHz.
No.5 Type2EL_Antenna can only be used for ANT0 (Antenna port 0)

8. Label and Compliance Information: Applicable

The following statements must be described on the user manual of the host device of this module:

Contains Transmitter Module FCC ID: VPYLBES5PL2EL

OR

Contains FCC ID: VPYLBES5PL2EL

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.



If it is difficult to describe this statement on the host product due to the size, please describe in the User's manual.

FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Compliance with FCC requirement 15.407(c)

Data transmission is always initiated by software, which is then passed down through the MAC, through the digital and analog baseband, and finally to the RF chip. Several special packets are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which then turns off at the end of the packet. Therefore, the

transmitter will be on only while one of the aforementioned packets is being transmitted. In other words, this device automatically discontinues transmission in case of either absence of information to transmit or operational failure.

Frequency Tolerance: ± 20 ppm.

When installing it in mobile equipment, please describe the following warning to the manual.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines. This equipment should be installed and operated keeping the radiator at least 20 cm or more away from person's body.

This module is only approved as mobile equipment. Therefore, do not install it on portable equipment.

If you wish to use it as a portable equipment, please contact Murata in advance as Class II application accompanied by SAR testing using the final product are required.

9. Information on Test Modes and Additional Testing Requirements: Applicable

Please check the installation manual first. Please contact Murata if you have any questions when conducting the RF certification test on the host. We (Murata) are ready to present the control manual and others for the RF certification test.

10. Additional Testing, Part 15 Subpart B Disclaimer: Applicable

The modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification.

The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

If the final product with this module is FCC Class A digital device, include the following in the manual of the final product.

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

If the final product with this module is FCC Class B digital device, include the following in the manual of the final product.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

11. Note on EMI Considerations: Applicable

A host manufacture is recommended to use KDB 996369 D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties.

For standalone mode, reference the guidance in D04 Module Integration Guide and for simultaneous mode⁷; see D02 Module Q&A Question 12, which permits the host manufacturer to confirm compliance.

12. How to Make Changes: Applicable

When changing from the conditions of approval, please present technical documentation that it is equivalent to a Class I change. For example, when adding or changing an antenna, the following technical documents are required.

1. The document indicating the same type as the original antenna.
2. Technical document showing that the gain is the same or lower than the gain at the time of the original approval.
3. Technical document showing that the spurious is no more than 3 dB worse than when it was originally certified.

2.1.7 About Power Supply (Limited Condition)

This Module (LBES5PL2EL and LBEE5PL2DL) has been approved as Limited Modular Approval. These modules do not have a voltage stabilizing circuit in the power path to the internal RF circuitry. Therefore, the Limited Condition must provide a stable power supply for the supply voltage to the module. Please supply a stable power supply so that the voltage shown in **Table 22** is applied.

Table 22: Power Supply Voltages (FCC)

Parameter		Minimum	Typical	Maximum	Unit
Supply Voltage	AVDD33	3.14	3.3	3.46	V
	AVDD18	1.71	1.8	1.89	V
	VIO	1.71 3.14	1.8 3.3	1.89 3.46	V
	SD_VIO	1.71 3.14	1.8 3.3	1.89 3.46	V

2.1.8 Trace Antenna and Feed Line

2.1.8.1 Signal Line Between an Antenna and a Module


It is a 50 Ω line design. Fine tuning of return loss etc. can be performed using a matching network. However, it is required to check "Class1 change" and "Class2 change" which the authorities define then.

The concrete contents of a check are the following three points.

1. It is the same type as the antenna type of antenna specifications.
2. An antenna gain is lower than a gain given in antenna specifications.
3. The emission level is not getting worse.

50 Ω line (microstrip line length) and Trace Antenna (Type2EL_Antenna) are used as the design of the EVB used for the test. **Figure 6** shows the pattern used in the certification test.

Figure 6: EVB Design Used for Testing (FCC)

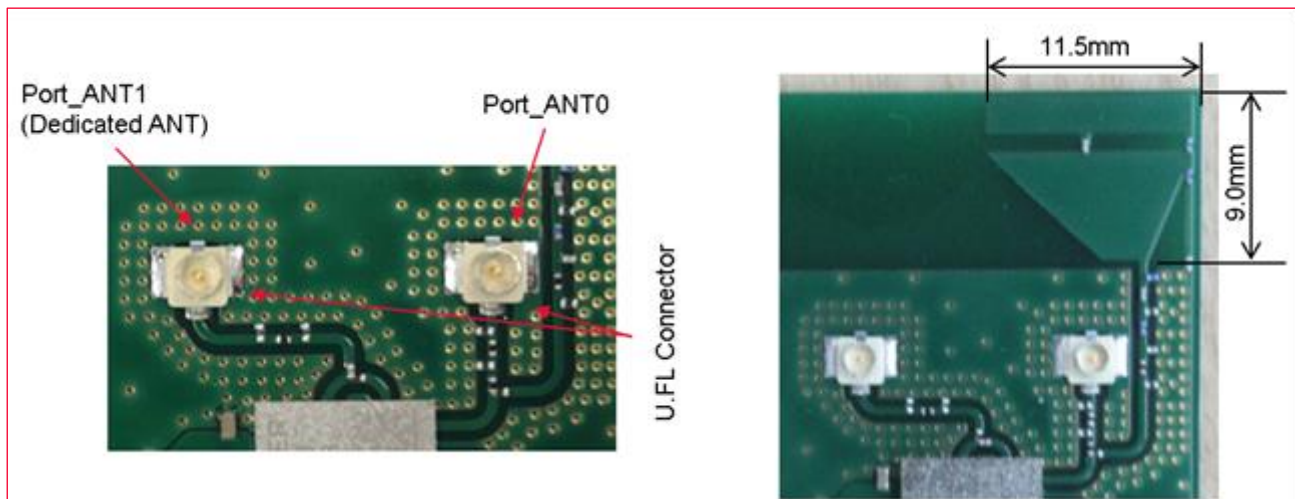

The 50 Ω microstrip line and Type2EL_Antenna needs to be copied when module is installed in the End product.




Murata provides set makers with Gerber data or something similar.

2.1.8.2 Trace Antenna and Feed Line of The Jig Where the Certification Test is Conducted

- Substrate type name of certification test jig: **P2ML10229**
- Feed line width: **0.4 mm**
- Substrate thin: **0.8 $\pm$ 0.1 mm**
- Substrate material: **FR -4**
- Substrate thickness between GND layer and surface layer: **0.235 mm**

Figure 7: Trace Antenna and Feed Line of The Jig (FCC)

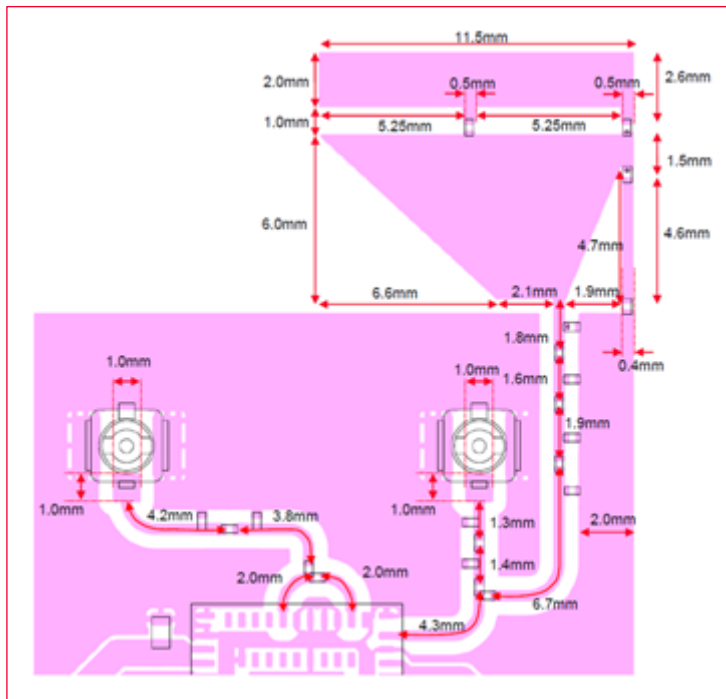

2.1.9 Layout Guidance for Microstrip Design and External Antenna

This section describes the trace antenna and provides layout guidance for microstrip design and external antenna.

2.1.9.1 Trace Antenna (Type2EL_Antenna)

The LBES5PL2EL (LBEE5PL2DL) module is certified with a PCB antenna (Type2EL_Antenna).



The following precautions should be taken when using this PCB antenna (Type2EL_Antenna)

- Type2EL_Antenna can only be used for port_ANT0 side.
- When the module is installed in the final product, the 50 Ω microstrip line and Type2EL_Antenna, outlined in right red in **Figure 8**, must be copied to the state shown in **Figure 9** where it was certified.
- Port_ANT1 can use the following four antennas when it is in Dedicated Usage.
 - 146153, 219611, WT32D1-KX, W24P-U



Murata provides set makers with Gerber data or something similar.



Figure 8: 50 Ω microstrip line and Type2EL_Antenna (FCC)

Figure 9: Trace antenna (Type2EL_Antenna) Layout Guide (FCC)



2.1.9.2 Antenna with u.FL Connector and Cables and Feed Lines (146153, 219611, WT32D1-KX, W24P-U)

- The LBES5PL2EL (LBEE5PL2DL) module is certified with four external antennae.

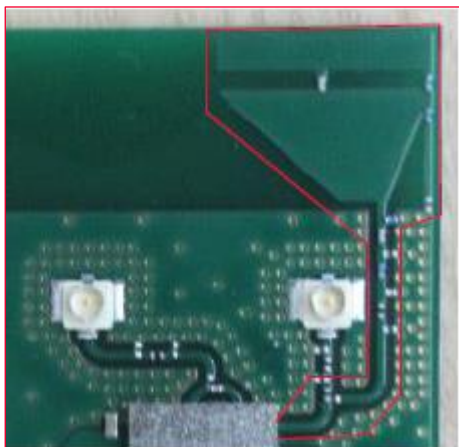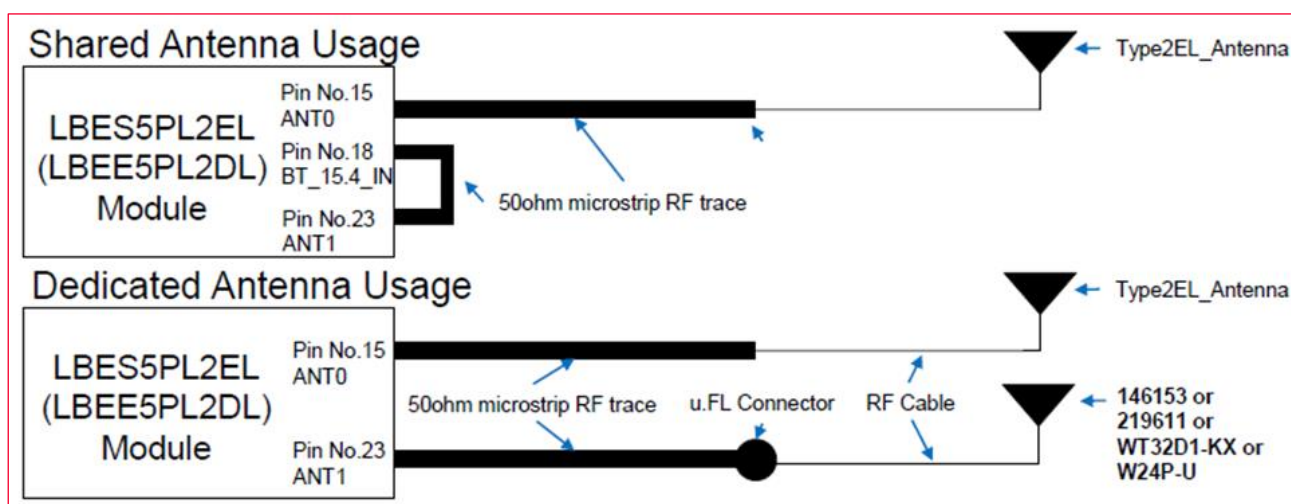

The external antenna should be connected to the LBES5PL2EL (LBEE5PL2DL) module using 50 Ω microstrip RF trace and a u.FL RF connector as described below.

- The microstrip RF trace and u.FL connector are placed on the customer's PCB and are external to the LBES5PL2EL (LBEE5PL2DL) module.
- The antenna is then connected to this u.FL Connector via a 50 Ω RF adapter cable.
- The design of the 50 Ω microstrip RF trace on the customer's PCB is crucially important.




Compliant operation of the LBES5PL2EL (LBEE5PL2DL) module is dependent on proper construction of this 50 Ω line and the following guidelines must be followed to ensure legal operation of the product.

Figure 10 shows the required microstrip structure to be routed between module pin 15, 23 and the u.FL connector.

The top PCB trace carries the RF energy from module to u.FL connector.


Figure 10: Antenna with u.FL Connector Layout Guide (FCC)

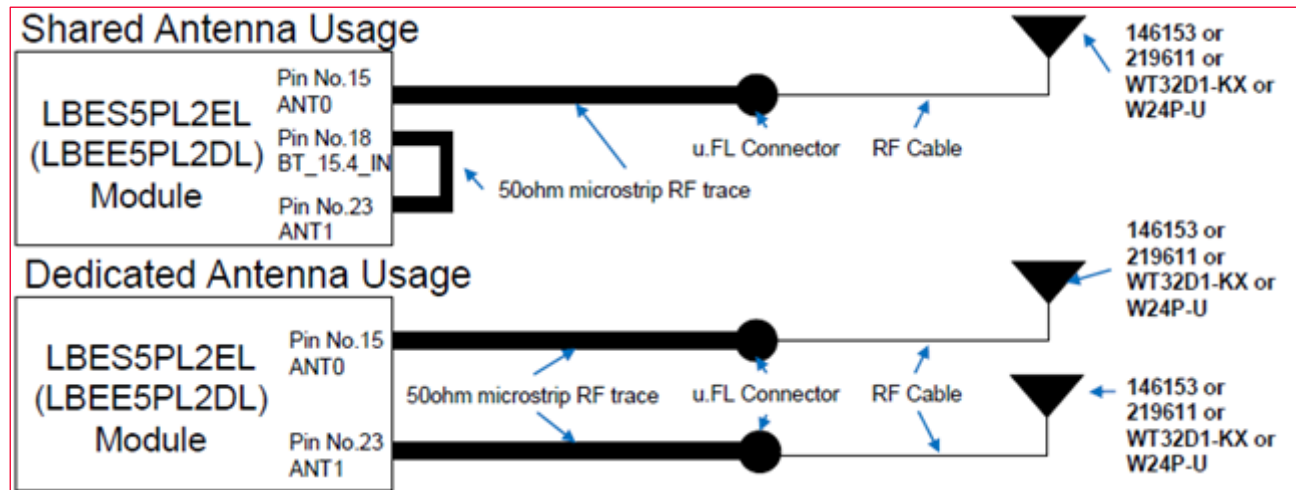

50 Ω microstrip RF trace: Murata provides set makers with Gerber data or something similar.

As shown in **Figure 11**, the Layer2 ground plane provides a return path for the circuit. The Dielectric material (along with the dimensions of the microstrip structures) determines the characteristic impedance of the microstrip transmission line.

Figure 11: Microstrip RF Trace Structure (FCC)

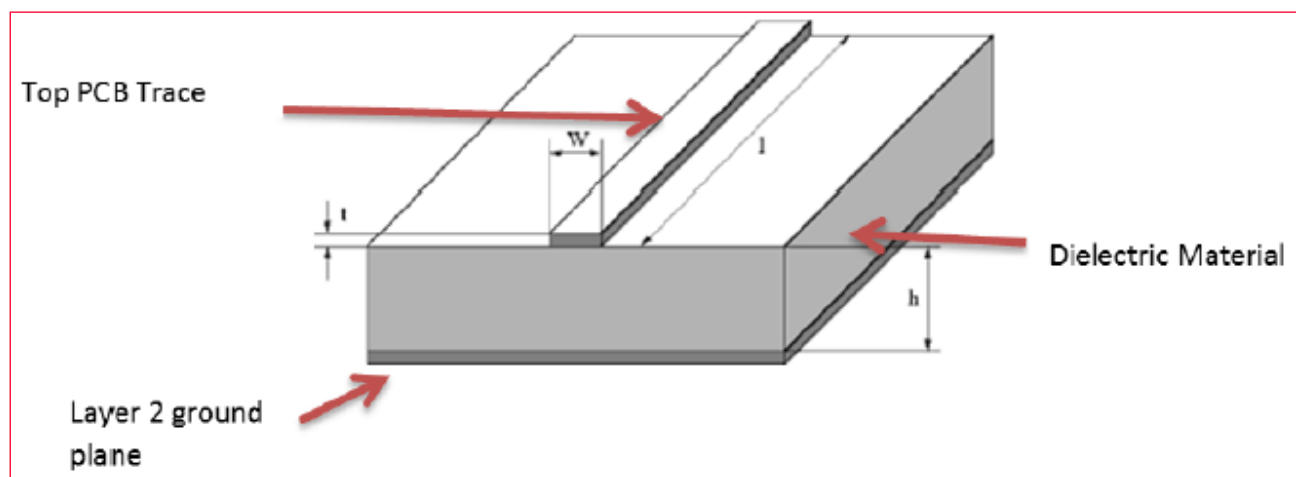

Note the representative dimensions shown in the drawing above. It is imperative that the module customer (the integrator) use the exact dimensions we recommend ensuring a 50 Ω impedance for this transmission line.

The following dimensions and/or ratios should be used to set the microstrip impedance to 50 Ω :

- Dielectric (PCB) Material: We recommend standard FR4 PCB material. Other dielectrics will work but will require recalculation of microstrip dimensions.

The following guidance is predicated on the use of FR4 Dielectric:

- If FR4 is not used for PCB material, please contact Murata to determine new dimensions for microstrip structure.
- h (Dielectric Height)** - this is the thickness of dielectric between the trace layer (layer 1) and the ground plane on layer 2.



Layer 2 must be electrical ground. We recommend a dielectric thickness of 8-15 mils. This range provides the customer with some flexibility in board construction.

- t (trace thickness)**: Microstrip impedance is not severely affected by the thickness dimension. Standard 102 or 202 copper deposition is recommended. Equivalent thickness is 1-2 mils.
- W (trace width)**: this is the crucial dimension. This width must be set correctly to obtain the desired 50 Ω impedance.

When using FR-4 dielectric, the width (W) of the microstrip trace should be set to: $W = H * 1.8$. Where W is microstrip trace width and H is Dielectric height. Note that both values must be measured in identical units (mils or mm).

Example:

$$H = 12 \text{ mils}, W = 12 * 1.8 = 21.6 \text{ mils}$$

$$H = 0.4 \text{ mm } W = 0.4 * 1.8 = 0.72 \text{ mm}$$

- l (trace length)**: the impedance of the microstrip line is not dependent on its length. However, regulatory and performance limitations practically determine the actual length to be used by the customer (integrator).



The length of this microstrip line must be longer than 7 mm to mimic the length used during FCC/ISED certification of the LBES5PL2EL (LBEE5PL2DL) module.

Lengths longer than 7 mm are acceptable although additional signal loss will occur as a result.

Given these restrictions, Murata recommends microstrip trace lengths between 7 mm and 25 mm.

In any event, the microstrip line must operate over the same Dielectric-Ground Plane configuration shown above to act as a 50 Ω transmission line.



Do not run the microstrip trace through sections of PCB that do not have the Dielectric-Ground plane configuration shown above.

A reliable 50 Ω transmission line will be produced if the above guidance is closely followed.



Any deviations from the guidance above may cause the module to operate in noncompliant manner.

Any implementation questions or concerns should be directed to Murata module technical support.

2.2 ISED

PMN: LBEE5PL2DL

HVIN: LBEE5PL2DL-SANT
LBEE5PL2DL-DANT

IC: 722C-LBES5PL2EL

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

English Version

For indoor use only (5150-5250 MHz band and channel 52, 54, 58).

French Version

Pour usage intérieur seulement (5150-5250 MHz band and channel 52, 54, 58)

English Version

Data transmission is always initiated by software, which is then passed down through the MAC, through the digital and analog baseband, and finally to the RF chip. Several special packets are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which then turns off at the end of the packet. Therefore, the transmitter will be on only while one of the aforementioned packets is being transmitted. In other words, this device automatically discontinues transmission in case of either absence of information to transmit or operational failure.

French Version

La transmission des données est toujours initiée par le logiciel, puis les données sont transmises par l'intermédiaire du MAC, par la bande de base numérique et analogique et, enfin, à la puce RF. Plusieurs paquets spéciaux sont initiés par le MAC. Ce sont les seuls moyens pour qu'une partie de la bande de base numérique active l'émetteur RF, puis désactive celui-ci à la fin du paquet. En conséquence, l'émetteur reste uniquement activé lors de la transmission d'un des paquets susmentionnés. En d'autres termes, ce dispositif interrompt automatiquement toute transmission en cas d'absence d'information à transmettre ou de défaillance.

English Version

This radio transmitter (IC: 772C-LBES5PL2EL) has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

French Version

Le présent émetteur radio (IC: 772C-LBES5PL2EL) a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci dessous et ayant un gain admissible maximal.

Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour

English Version

When installing it in mobile equipment:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment should be installed and operated by keeping the radiator at least 20cm or more away from person's body.

French Version

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le radiateur et le corps humain.

When installing it in a portable equipment:

It is necessary to take an SAR test with your set mounting this module.

Class 4 permissive change application is necessary using the SAR report.

Please contact Murata.



- **Portable equipment:** Equipment for which the spaces between human body and antenna are used within 20 cm.
- **Mobile equipment:** Equipment used at position in which the spaces between human body and antenna exceeded 20 cm.

2.2.1 Antenna List

English Version

This radio transmitter (772C-LBES5PL2EL) has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated.

Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Dipole Antenna Gain: 3.2 dBi@2.4 GHz/4.25 dBi @ 5 GHz

Dipole Antenna Gain: 2.67 dBi@2.4 GHz/3.67 dBi @ 5 GHz

Dipole Antenna Gain: 3.0 dBi@2.4 GHz/4.0 dBi @ 5 GHz

Dipole Antenna Gain: 3.2 dBi@2.4 GHz

Monopole Antenna Gain: 3.6 dBi@2.4 GHz/4.6 dBi @ 5GHz

French Version

Le présent émetteur radio (772C-LBES5PL2EL) a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci dessous et ayant un gain admissible maximal.

Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

Dipole Antenna Gain: 3.2 dBi@2.4 GHz/4.25 dBi@5 GHz

Dipole Antenna Gain: 2.67 dBi@2.4 GHz/3.67 dBi@5 GHz

Dipole Antenna Gain: 3.0 dBi@2.4 GHz/4.0 dBi@5 GHz

Dipole Antenna Gain: 3.2 dBi@2.4 GHz

Monopole Antenna Gain: 3.6 dBi@2.4 GHz/4.6 dBi@5 GHz

2.2.2 Dimensions

Figure 12 shows the dimensions and markings.

Figure 12: Dimensions and Marking Labels (ISED)

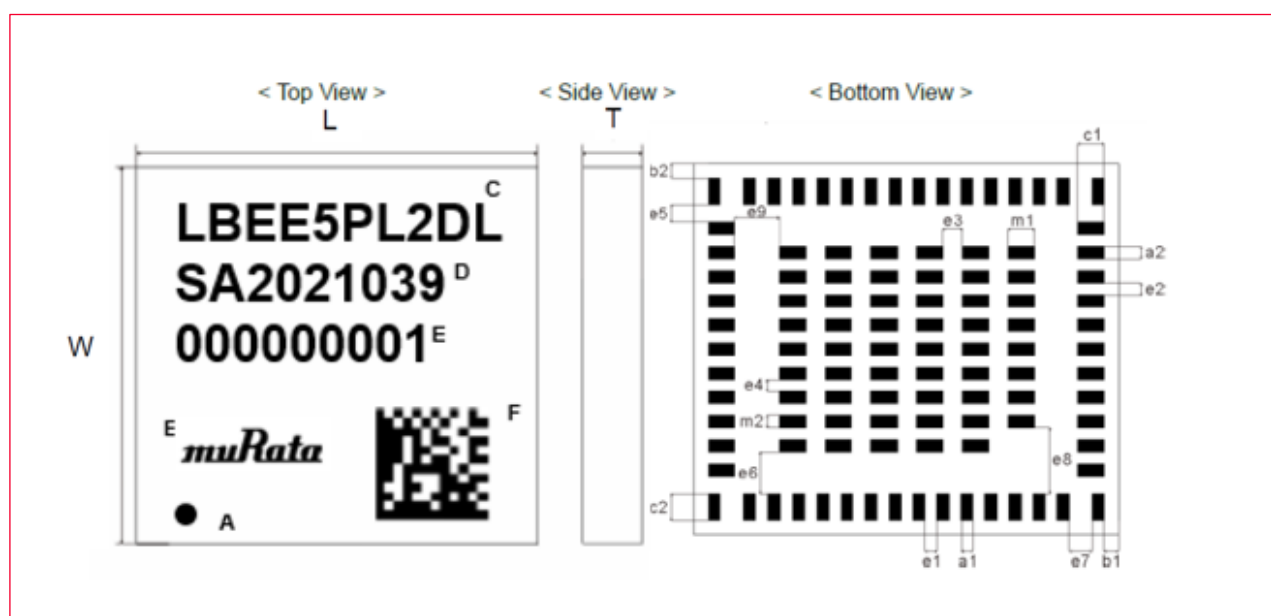


Table 23 describes the marking labels in Figure 12.

Table 23: Marking Labels (ISED)

Marking	Meaning
A	Pin1 Marking
B	muRata Logo
C	Module Type
D	Inspection Number
E	Serial Number
F	2D code

Table 24 describes the dimensions against markings.

Table 24: Markings (in Millimeters)

Mark	Dimensions (mm)	Mark	Dimensions (mm)	Mark	Dimensions (mm)
L	8.8 +/-0.2	W	7.7 +/-0.2		
T	1.3 maximum	T1	0.04 typical (Bump)		
a1	0.25 +/- 0.1	a2	0.25 +/- 0.1	b1	0.3 +/- 0.2
b2	0.3 +/- 0.2	c1	0.55 +/- 0.1	c2	0.55 +/- 0.1
e1	0.25 +/- 0.1	e2	0.25 +/- 0.1	e3	0.4 +/- 0.1
e4	0.25 +/- 0.1	e5	0.375 +/- 0.1	e6	0.875 +/- 0.1
e7	0.475 +/- 0.1	e8	1.375 +/- 0.1	e9	0.9 +/- 0.1
m1	0.55 +/- 0.1	m2	0.25 +/- 0.1		

No.	Terminal Name	No.	Terminal Name	No.	Terminal Name
15	ANT0	43	GND	71	GND
16	GND	44	SD_CLK	72	SD_INT
17	GND	45	SD_DAT[1]	73	WL_WAKE_OUT
18	BT_IN	46	SD_DAT[3]	74	WL_WAKE_IN
19	GND	47	SD_DAT[2]	75	BT_WAKE_IN
20	GND	48	SD_DAT[0]	76	BT_WAKE_OUT
21	GND	49	UART_TX	77	NC
22	GND	50	UART_CTS	78	NC
23	ANT1	51	UART_RX	79	XOSC_EN
24	RF_CNTL4	52	UART_RTS	80	NC
25	RF_CNTL3/CONFIG_XOSC_SEL	53	GND	81-107	GND
26	RF_CNTL1	54	VIO		
27	RF_CNTL0	55	CONFIG_HOST[0]		
28	GND	56	CONFIG_HOST[1]		

2.2.4 Operating Conditions

Table 26 describes the operating conditions.

Table 26: Operating Conditions (ISED)

Parameter		Minimum	Typical	Maximum	Unit
Operating Temperature		-40	25	85	°C
Supply Voltage	AVDD33	3.14	3.3	3.46	V
	AVDD18	1.71	1.8	1.89	V
	VIO	1.71 3.14	1.8 3.3	1.89 3.46	V
	SD_VIO	1.71 3.14	1.8 3.3	1.89 3.46	V



VIO,SD_VIO have two systems, 1.8V system and 3.3V system. However, these do not affect the RF characteristics.

2.2.5 Setting RF Power

This section describes RF power settings.

2.2.5.1 RF Power Setting for 2.4 GHz

The following tables describe the parameters for 2.4 GHz power settings.

Table 27: WLAN RF Power Setting - 2.4 GHz 802.11 b/g/n(HT20/40/ac(VHT20/40) (ISED)

Mode	Rate/MCS index	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11b	All Rate	1	16.0 ± 2.0
		2, 10, 11	17.0 ± 2.0
		3 ~ 9	18.0 ± 2.0
IEEE 802.11g	All rate	1, 11	12.0 ± 2.0
		2	13.0 ± 2.0
		3, 9, 10	14.0 ± 2.0
		4, 5	15.0 ± 2.0
		6 ~ 8	16.0 ± 2.0
IEEE 802.11n (HT20)	All MCS index	1, 11	11.0 ± 2.0
		2	12.0 ± 2.0
		3, 9	14.0 ± 2.0
		4 ~ 8	15.0 ± 2.0
		10	13.0 ± 2.0
IEEE 802.11n (HT40)	All MCS index	3, 8, 9	10.0 ± 2.0
		4, 5, 6, 7	11.0 ± 2.0
IEEE 802.11ac (VHT20)	All MCS index	1, 11	11.0 ± 2.0
		2	12.0 ± 2.0
		3, 9,	14.0 ± 2.0
		4 ~ 8	15.0 ± 2.0
		10	13.0 ± 2.0
IEEE 802.11ac (VHT40)	All MCS index	3, 8, 9	10.0 ± 2.0
		4, 5, 6, 7	11.0 ± 2.0

Table 28: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE20) (ISED)

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	1	MCS0 ~ MCS7	SU	11.0 ± 2.0		
					242 tone (Full tone)	10.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
		MCS8 ~ MCS11	SU	11.0 ± 2.0		
					242 tone (Full tone)	10.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
	2	MCS0 ~ MCS11	SU	12.0 ± 2.0		
					242 tone (Full tone)	12.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	3	MCS0 ~ MCS7	SU	14.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	4	MCS0 ~ MCS7	SU	15.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	5, 6	MCS0 ~ MCS7	SU	15.0 ± 2.0		
					242 tone (Full tone)	15.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ 11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	7, 8	MCS0 ~ MCS7	SU	15.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ 11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	9	MCS0 ~ MCS7	SU	14.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
		MCS8 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0
	10	MCS0 ~ MCS11	SU	13.0 ± 2.0		
					242 tone (Full tone)	12.0 ± 2.0
					26 tone	12.0 ± 2.0
					52 tone	12.0 ± 2.0
					106 tone	12.0 ± 2.0

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	11	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					242 tone (Full tone)	11.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0

Table 29: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE40) (ISED)

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	3	MCS0 ~ MCS11	SU	10.0 ± 2.0		
					484 tone (Full tone)	6.0 ± 2.0
					26 tone	9.0 ± 2.0
					52 tone	10.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0
	4	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	8.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	5	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	10.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	6	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	11.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0
	7	MCS0 ~ MCS11	SU	11.0 ± 2.0		
					484 tone (Full tone)	11.0 ± 2.0
					26 tone	11.0 ± 2.0
					52 tone	11.0 ± 2.0
					106 tone	11.0 ± 2.0
					242 tone	11.0 ± 2.0

Mode	Channel	Rate / MCS index	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	8	MCS0 ~ MCS11	SU	10.0 ± 2.0		
					484 tone (Full tone)	8.0 ± 2.0
					26 tone	10.0 ± 2.0
					52 tone	10.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0
	9	MCS0 ~ MCS7	SU	10.0 ± 2.0		
					484 tone (Full tone)	7.0 ± 2.0
					26 tone	10.0 ± 2.0
					52 tone	10.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0

2.2.5.2 RF Power Setting for BT (BR/EDR) / BLE

RF power settings for BT (BR/EDR) and BLE are described in .

Table 30: BT (BR/EDR) / BLE RF Power Setting (ISED)

Mode	Channel	Maximum Tune Up Tolerance (dBm)
BR	NA	13.0 ± 3.0
EDR	NA	5.0 ± 3.0
LE	NA	13.0 ± 3.0
LE 2 Mbps	NA	13.0 ± 3.0

2.2.5.3 RF Power Setting for 5 GHz WLAN

RF power settings for 5 GHz WLAN are described in the following tables.

Table 31: WLAN RF Power Setting - 5 GHz 802.11a (ISED)

Mode	Rate	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11a	All Rate	W52/W53	36, 40, 44, 48 60, 64	14.0 ± 2.0
	All Rate	W52/W53	52, 56	16.0 ± 2.0
	All Rate	W56	100, 104	14.0 ± 2.0
	All Rate	W56	108 ~ 138, 144 (w/o 120, 124, 128)	16.0 ± 2.0
	All Rate	W56	140	13.0 ± 2.0
	All Rate	W58	161, 165	14.0 ± 2.0
	All Rate	W58	149 ~ 157	16.0 ± 2.0

Table 32: WLAN RF Power Setting - 5 GHz 802.11n (HT20) (ISED)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11n (HT20)	All MCS Index	W52/W53	36, 40, 60, 64	11.0 ± 2.0
	All MCS Index	W52/W53	44 ~ 56	14.0 ± 2.0
	All MCS Index	W56	100, 104	11.0 ± 2.0
	All MCS Index	W56	108 ~ 136, 144 (w/o 120, 124, 128)	14.0 ± 2.0
	All MCS Index	W56	140	10.0 ± 2.0
	All MCS Index	W58	161, 165	11.0 ± 2.0
	All MCS Index	W58	149 ~ 157	14.0 ± 2.0

Table 33: WLAN RF Power Setting - 5 GHz 802.11n (HT40) (ISED)

Mode	Rate	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11n (HT40)	All MCS index	W52/W53	38	10.0 ± 2.0
	All MCS index	W52/W53	62	11.0 ± 2.0
	All MCS index	W52/W53	46, 54	14.0 ± 2.0
	All MCS Index	W56	102	10.0 ± 2.0
	All MCS Index	W56	110 ~ 126, 142 (w/o 118, 126)	14.0 ± 2.0
	All MCS Index	W56	134	13.0 ± 2.0
	All MCS Index	W58	159	11.0 ± 2.0
	All MCS Index	W58	151	14.0 ± 2.0

Table 34: WLAN RF Power Setting - 5 GHz 802.11ac (VHT20) (ISED)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT20)	All MCS index	W52/W53	36, 40, 60, 64	11.0 ± 2.0
	All MCS index	W52/W53	44 ~ 56	14.0 ± 2.0
	All MCS index	W56	100, 104	11.0 ± 2.0
	All MCS index	W56	108 ~ 136, 144 (w/o 120,124,128)	14.0 ± 2.0
	All MCS index	W56	140	10.0 ± 2.0
	All MCS index	W58	161 ~ 165	11.0 ± 2.0
	All MCS index	W58	149 ~ 157	14.0 ± 2.0

Table 35: WLAN RF Power Setting – 5 GHz 802.11ac (VHT40) (ISED)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT40)	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	38	10.0 ± 2.0
	MCS8, MCS9	W52/W53	38	10.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	62	11.0 ± 2.0
	MCS8, MCS9	W52/W53	62	11.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	46, 54	14.0 ± 2.0
	MCS8, MCS9	W52/W53	46, 54	12.0 ± 2.0
	MCS8, MCS9 MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	102	10.0 ± 2.0
	MCS8, MCS9	W56	102	10.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	110 ~ 126, 142 (w/o 1 18, 126)	14.0 ± 2.0
	MCS8, MCS9	W56	110 ~ 126, 142 (w/o 1 18, 126)	12.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	134	13.0 ± 2.0
	MCS8, MCS9	W56	134	12.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	159	11.0 ± 2.0
	MCS8, MCS9	W58	159	11.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	151	14.0 ± 2.0
	MCS8, MCS9	W58	151	12.0 ± 2.0

Table 36: WLAN RF Power Setting – 5 GHz 802.11ac (VHT80) (ISED)

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT80)	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	42	10.0 ± 2.0
	MCS8, MCS9	W52/W3	42	10.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	58	11.0 ± 2.0
	MCS8, MCS9	W52/W3	58	11.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	106	7.0 ± 2.0
	MCS8, MCS9	W6	106	7.0 ± 2.0

Mode	MCS Index	Band	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ac (VHT80)	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	138	14.0 ± 2.0
	MCS8, MCS9	W56	138	12.0 ± 2.0
	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	155	9.0 ± 2.0
	MCS8, MCS9	W58	155	9.0 ± 2.0

Table 37: WLAN RF Power Setting - 5 GHz 802.11ax (HE20) (ISED)

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	36, 40	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	44	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	44	MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	48	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	52, 56	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	60 ~ 64	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	100, 104	MCS0 ~ MCS9	W56	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	108 ~ 136 (w/o 120,124,128)	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	108 ~ 136 (w/o 120,124,128)	MCS10, MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	140	MCS0 ~ MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	7.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	144	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	149 ~ 157	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	SU	14.0 ± 2.0		
						242 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
		MCS8, MCS9	W58	SU	12.0 ± 2.0		
						242 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	149 ~ 157	MCS10, MCS11	W58	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
	161, 165	MCS0 ~ MCS9	W58	SU	11.0 ± 2.0		
						242 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
		MCS10, MCS11	W58	SU	10.0 ± 2.0		
						242 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0

Table 38: WLAN RF Power Setting - 5 GHz 802.11ax (HE40) (ISED)

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	38	MCS0 ~ MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	7.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	46	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						484 tone (Full tone)	14.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	11.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)						242 tone	12.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	54	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	14.0 ± 2.0		
						484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W52/W53	SU	12.0 ± 2.0		
						484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	62	MCS0 ~ MCS9	W52/W53	SU	11.0 ± 2.0		
						484 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)		
IEEE 802.11ax (HE40)	102	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	10.0 ± 2.0				
						484 tone (Full tone)	3.0 ± 2.0		
						26 tone	10.0 ± 2.0		
						52 tone	10.0 ± 2.0		
						106 tone	10.0 ± 2.0		
						242 tone	8.0 ± 2.0		
		MCS8, MCS9, MCS10, MCS11	W56	SU	10.0 ± 2.0				
						484 tone (Full tone)	3.0 ± 2.0		
						26 tone	10.0 ± 2.0		
						52 tone	10.0 ± 2.0		
						106 tone	10.0 ± 2.0		
						242 tone	8.0 ± 2.0		
	110 ~ 126 (w/o 118, 126)	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0				
						484 tone (Full tone)	14.0 ± 2.0		
						26 tone	11.0 ± 2.0		
						52 tone	14.0 ± 2.0		
						106 tone	14.0 ± 2.0		
						242 tone	14.0 ± 2.0		
			MCS8, MCS9	W56	SU	12.0 ± 2.0			
							484 tone (Full tone)	12.0 ± 2.0	
							26 tone	11.0 ± 2.0	
							52 tone	12.0 ± 2.0	
							106 tone	12.0 ± 2.0	
							242 tone	12.0 ± 2.0	
		MCS10, MCS11	W56	SU	10.0 ± 2.0				
						484 tone (Full tone)	10.0 ± 2.0		
						26 tone	10.0 ± 2.0		
						52 tone	10.0 ± 2.0		
			134	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	13.0 ± 2.0		
								484 tone (Full tone)	13.0 ± 2.0
							26 tone	11.0 ± 2.0	
							52 tone	13.0 ± 2.0	
							106 tone	13.0 ± 2.0	
							242 tone	12.0 ± 2.0	
		MCS8, MCS9		W56	SU	12.0 ± 2.0			
							484 tone (Full tone)	12.0 ± 2.0	
						26 tone	11.0 ± 2.0		
						52 tone	12.0 ± 2.0		
						106 tone	12.0 ± 2.0		

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)		MCS10, MCS11	W56	SU	10.0 ± 2.0	242 tone	12.0 ± 2.0
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	142	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0	484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0	484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0	484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	151	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	SU	14.0 ± 2.0	484 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
		MCS8, MCS9	W58	SU	12.0 ± 2.0	484 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	151	MCS10, MCS11	W58	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
	159	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W58	SU	11.0 ± 2.0		
						484 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
		MCS8, MCS9	W58	SU	11.0 ± 2.0		
						484 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
		MCS10, MCS11	W58	SU	10.0 ± 2.0		
						484 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0

Table 39: WLAN RF Power Setting - 5 GHz 802.11ax (HE80) (ISED)

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE80)	42	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W52/W53	SU	10.0 ± 2.0		
						996 tone (Full tone)	7.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
						484 tone	10.0 ± 2.0
		MCS8, MCS9, MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						996 tone (Full tone)	7.0 ± 2.0
						26 tone	8.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
						484 tone (Full tone)	10.0 ± 2.0
	58	MCS0 ~ MCS9	W52/W53	SU	11.0 ± 2.0		
						996 tone (Full tone)	11.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	11.0 ± 2.0
						106 tone	11.0 ± 2.0
						242 tone	11.0 ± 2.0
						484 tone	11.0 ± 2.0
		MCS10, MCS11	W52/W53	SU	10.0 ± 2.0		
						996 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
						484 tone	10.0 ± 2.0
	106	MCS0 ~ MCS11	W56	SU	7.0 ± 2.0		
						996 tone (Full tone)	5.0 ± 2.0
						26 tone	7.0 ± 2.0
						52 tone	7.0 ± 2.0
						106 tone	7.0 ± 2.0
						242 tone	7.0 ± 2.0
						484 tone	7.0 ± 2.0

Mode	Channel	MCS Index	Band	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE80)	138	MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7	W56	SU	14.0 ± 2.0		
						996 tone (Full tone)	14.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	14.0 ± 2.0
						106 tone	14.0 ± 2.0
						242 tone	14.0 ± 2.0
						484 tone	14.0 ± 2.0
		MCS8, MCS9	W56	SU	12.0 ± 2.0		
						996 tone (Full tone)	12.0 ± 2.0
						26 tone	11.0 ± 2.0
						52 tone	12.0 ± 2.0
						106 tone	12.0 ± 2.0
						242 tone	12.0 ± 2.0
						484 tone	12.0 ± 2.0
		MCS10, MCS11	W56	SU	10.0 ± 2.0		
						996 tone (Full tone)	10.0 ± 2.0
						26 tone	10.0 ± 2.0
						52 tone	10.0 ± 2.0
						106 tone	10.0 ± 2.0
						242 tone	10.0 ± 2.0
						484 tone	10.0 ± 2.0
	155	MCS0 ~ MCS11	W58	SU	9.0 ± 2.0		
						996 tone (Full tone)	9.0 ± 2.0
						26 tone	9.0 ± 2.0
						52 tone	9.0 ± 2.0
						106 tone	9.0 ± 2.0
						242 tone	9.0 ± 2.0
						484 tone	9.0 ± 2.0

2.2.6 Theory of Operation

describes the theory of operation.

Table 40: Theory of Operation (ISED)

Frequency of Operation			Scan	Ad hoc Mode
2.4 GHz	11b/g/n/ac/ax (BW20)	2412-2462 MHz	Active	Yes
	11n/ac/ax (BW40)	2422-2452 MHz	Active	Yes
	BT	2402-2480 MHz	N/A	N/A
	BLE	2402-2480 MHz	N/A	N/A
W52	11a/n/ac/ax (BW20)	5180-5240 MHz	Active	Yes
	11n/ac/ax (BW40)	5190-5230 MHz	Active	Yes
	11ac/ax (BW80)	5210 MHz	Active	Yes
W53	11a/n/ac/ax (BW20)	5260-5320 MHz	Passive	No
	11n/ac/ax (BW40)	5270-5310 MHz	Passive	No
	11ac/ax (BW80)	5290 MHz	Passive	No
W56	11a/n/ac/ax (BW20)	5500-5720 MHz ¹	Passive	No
	11n/ac/ax (BW40)	5510-5710 MHz ¹	Passive	No
	11ac/ax (BW80)	5530-5690 MHz ¹	Passive	No
W58	11a/n/ac/ax (BW20)	5745-5825 MHz	Active	Yes
	11n/ac/ax (BW40)	5755-5795 MHz	Active	Yes
	11ac/ax (BW80)	5775 MHz	Active	Yes

Since this module is not sold to general end users directly, there is no user manual of module. For the details about this module, please refer to the specification sheet of module.

This module should be installed in the host device according to the interface specification (installation procedure).

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the end user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as shown in User manual.

- The following information must be indicated on the host device of this module.

Contains IC: 772C-LBES5PL2EL

- In the case of the final product which can be carried around outdoors. The following indication is necessary for the final product.

¹ * The frequency band 5600 MHz-5640 MHz (11a/n 20M band), 5590 MHz-5630 MHz (11n/ac/ax 40M band) and 5610 MHz (11ac/ax 80M band) is restricted in ISED.

* DFS MASTER function not available.

* DFS client function available.

* There is a TPC function.

- When the STA function is used in channel 52, 54, or 58.

At the time of the channel 52, 54 or 58 setting, please indicate “for indoor use only channel”. During connecting, please show the channel number which connects. And please indicate that the end user may find out “for indoor use only channel”.

- If the final product uses the following frequency, please note that there is a limit.

English Version

For indoor use only (5150-5250 MHz band and channel 52, 54, 58).

French Version

Pour usage intérieur seulement (5150-5250 MHz band and channel 52, 54, 58)

English Version

Data transmission is always initiated by software, which is then passed down through the MAC, through the digital and analog baseband, and finally to the RF chip. Several special packets are initiated by the MAC. These are the only ways the digital baseband portion will turn on the RF transmitter, which it then turns off at the end of the packet. Therefore, the transmitter will be on only while one of the aforementioned packets is being transmitted. In other words, this device automatically discontinues transmission in case of either absence of information to transmit or operational failure.

French Version

La transmission des données est toujours initiée par le logiciel, puis les données sont transmises par l'intermédiaire du MAC, par la bande de base numérique et analogique et, enfin, à la puce RF. Plusieurs paquets spéciaux sont initiés par le MAC. Ce sont les seuls moyens pour qu'une partie de la bande de base numérique active l'émetteur RF, puis désactive celui-ci à la fin du paquet. En conséquence, l'émetteur reste uniquement activé lors de la transmission d'un des paquets susmentionnés. En d'autres termes, ce dispositif interrompt automatiquement toute transmission en cas d'absence d'information à transmettre ou de défaillance.

English Version

This radio transmitter (IC: 772C-LBES5PL2EL) has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated.

Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

French Version

Le présent émetteur radio (IC: 772C-LBES5PL2EL) a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci dessous et ayant un gain admissible maximal.

Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour.

- The following statements must be described on the user manual of the host device of this module:

English Version

This device contains license-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

French Version

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage.
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

- When installing it in a mobile equipment:

English Version

This equipment complies with ISED radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment should be installed and operated keeping the radiator at least 20cm or more away from person's body.

French Version

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'ISED. Cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le radiateur et le corps humain.

- When installing it in a portable equipment:

It is necessary to take a SAR test with your set mounting this module.

Class 4 permissive change application is necessary using the SAR report.

Please contact Murata.



- **Portable equipment:** Equipment for which the spaces between human body and antenna are used within 20 cm.
- **Mobile equipment:** Equipment used at position in which the spaces between human body and antenna exceeded 20 cm.

- If the antenna of the end product is removed, please describe the follow warning on the manual of the end product which contains this module.

English Version

This radio transmitter (772C-LBES5PL2EL) has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated.

Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Dipole Antenna Gain: 3.2 dBi @ 2.4 GHz/4.25 dBi @ 5GHz

Dipole Antenna Gain: 2.67 dBi @ 2.4 GHz/3.67 dBi @ 5GHz

Dipole Antenna Gain: 3.0 dBi @ 2.4 GHz/4.0 dBi @ 5GHz

Dipole Antenna Gain: 3.2 dBi @ 2.4 GHz

Monopole Antenna Gain: 3.6 dBi @ 2.4 GHz/4.6 dBi @ 5 GHz

Monopole Antenna Gain: 3.6 dBi @ 2.4 GHz/3.6 dBi @ 5 GHz

French Version

Le présent émetteur radio (772C-LBES5PL2EL) a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci dessous et ayant un gain admissible maximal.

Les types d'antenne non inclus dans cette liste, et dont le gain est supérieur au gain maximal indiqué pour tout type figurant sur la liste, sont strictement interdits pour l'exploitation de l'émetteur.

Dipole Antenna Gain: 3.2 dBi @ 2.4 GHz/4.25 dBi @ 5 GHz

Dipole Antenna Gain: 2.67 dBi @ 2.4 GHz/3.67 dBi @ 5 GHz

Dipole Antenna Gain: 3.0 dBi @ 2.4 GHz/4.0 dBi @ 5 GHz

Dipole Antenna Gain: 3.2 dBi @ 2.4 GHz

Monopole Antenna Gain: 3.6 dBi @ 2.4 GHz/4.6 dBi @ 5GHz

Monopole Antenna Gain: 3.6 dBi @ 2.4 GHz/3.6 dBi @ 5GHz

2.2.7 Antenna

The antenna models for ISED are described in .

Table 41: Antenna (ISED)

No.	Antenna P/N	Maker	Type	Peak Gain		Connector/Form
				2400-2500 MHz	5150-5850 MHz	
1	146153 (50 mm cable)	Molex	Dipole	3.2 dBi	4.25 dBi	u.FL
2	219611 (50 mm cable)	Molex	Dipole	2.67 dBi	3.67 dBi	u.FL
3	WT32D1-KX	Unitron	Dipole	3 dBi	4 dBi	u.FL
4	W24P-U	Inventek	Dipole	3.2 dBi	N/A	u.FL
5	Type2EL_Antenna	Murata	Monopole	3.6 dBi	4.6 dBi	Trace (Pattern)



No. 4 W24P-U can only be used at 2.4 GHz band.
 No. 5 Type2EL_Antenna can only be used for ANT0 (Antenna Port 0)

2.2.7.1 Signal Line Between an Antenna and a Module


It is a 50 Ω line design. Fine tuning of return loss etc. can be performed using a matching network. However, it is required to check "Class1 change" and "Class2 change" which the authorities define then.

The concrete contents of a check are the following three points:

1. It is the same type as the antenna type of antenna specifications.
2. An antenna gain is lower than a gain given in antenna specifications.
3. The emission level is not getting worse.

50 Ω line (microstrip line length) and Trace Antenna (Type2EL_Antenna) are used as the design of the EVB used for the test. **Figure 14** shows the pattern used in the certification test.

Figure 14: EVB Design Used for Testing (ISED)

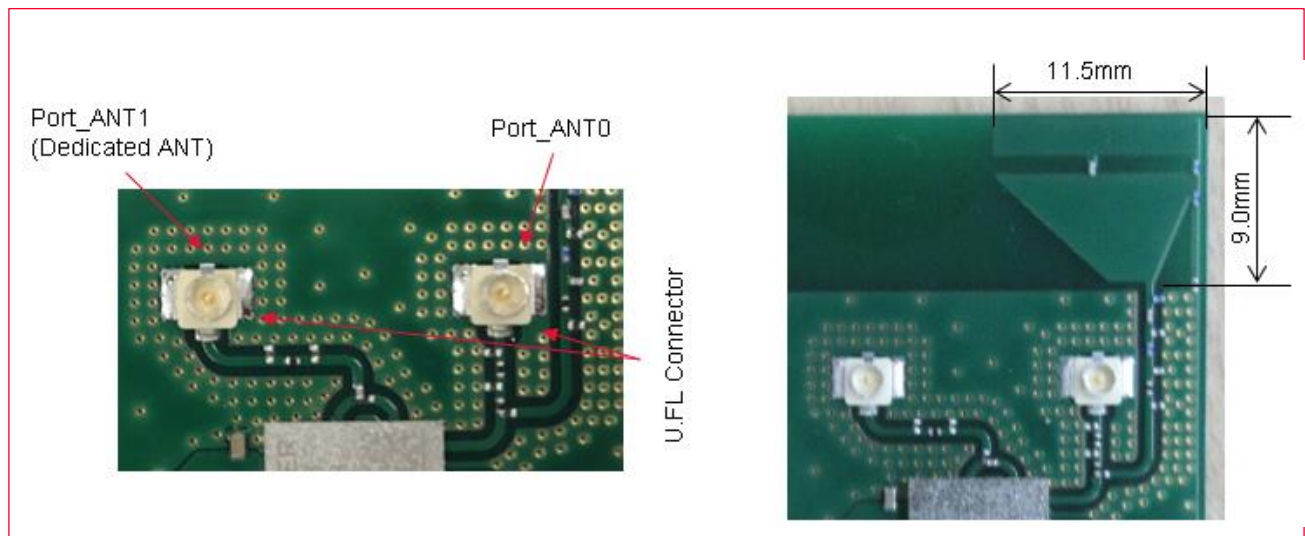

The 50 Ω microstrip line and Type2EL_Antenna needs to be copied when module is installed in the End product.




Murata provides set makers with Gerber data or something similar.

2.2.7.2 Trace Antenna and Feed Line of The Jig Where the Certification Test is Conducted

- Substrate type name of certification test jig: **P2ML10229-S** and **P2ML10229-D**.
- Feed line width: **0.4 mm**
- Substrate thin: **0.8 $\pm$ 0.1 mm**
- Substrate material: **FR -4**
- Substrate thickness between GND layer and surface layer: **0.235 mm**

Figure 15 shows the trace antenna and feed line of the Jig.

Figure 15: Trace Antenna and Feed Line of The Jig (ISED)

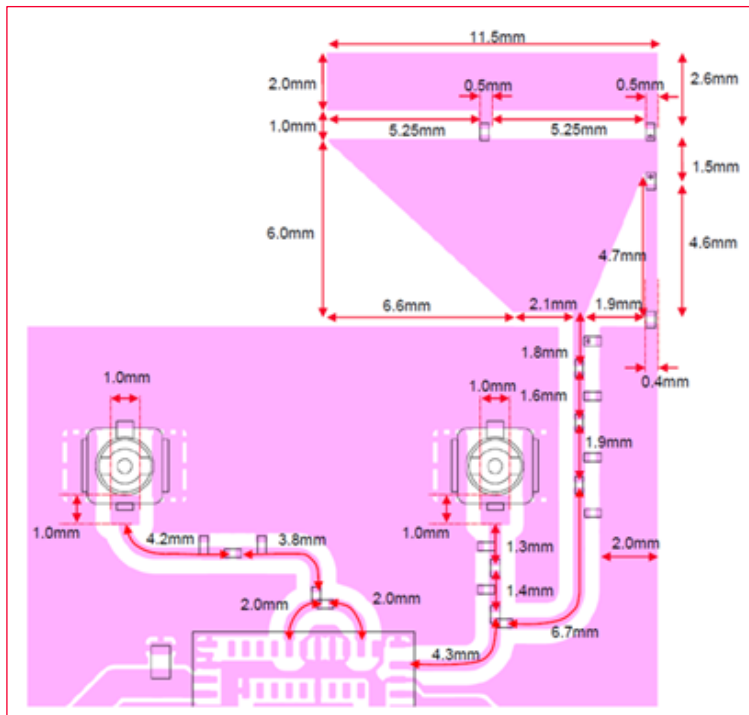

2.2.8 Layout Guidance for Microstrip Design and External Antenna

This section describes the trace antenna and layout guidance for microstrip design and external antenna.

2.2.8.1 Trace antenna (Type2EL_Antenna)



The LBES5PL2EL module is certified with a PCB antenna (Type2EL_Antenna).

The following precautions should be taken when using this PCB antenna (Type2EL_Antenna):

- Type2EL_Antenna can only be used for port_ANT0 side.
- When the module is installed in the final product, the 50 Ω microstrip line and Type2EL_Antenna, outlined in right red in **Figure 16**, must be copied to the state shown in **Figure 17** where it was certified.
- Port_ANT1 can use the following four antennas when it is in Dedicated Usage.
 - 146153, 219611, WT32D1-KX, W24P-U



Murata provides set makers with Gerber data or something similar.



Figure 16: 50 Ω Microstrip Line and Type2EL_Antenna (ISED)

Figure 17: Trace Antenna (Type2EL_Antenna) Layout Guide (ISED)



2.2.8.2 Antenna with u.FL Connector and Cables and Feed Lines (146153, 219611, WT32D1-KX, W24P-U)

- The LBES5PL2EL module is certified with a PCB antenna and four external antennae.

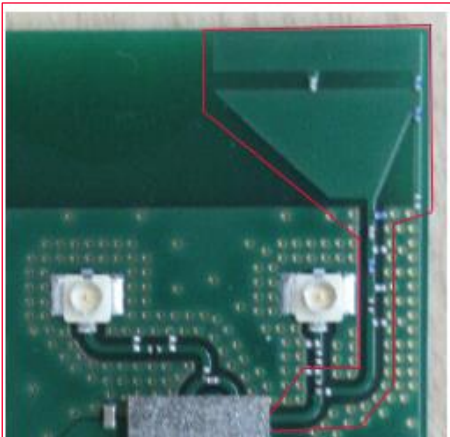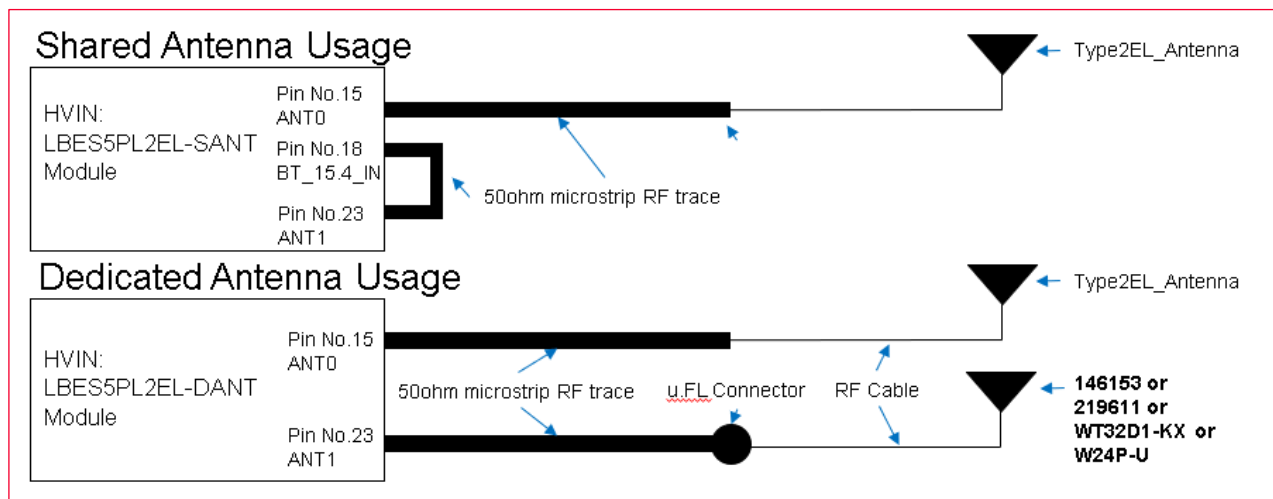

The external antenna should be connected to the LBES5PL2EL module using 50 Ω microstrip RF trace and an u.FL RF connector as described below.

- The microstrip RF trace and u.FL connector are placed on the customer's PCB and are external to the LBES5PL2EL module.
- The antenna is then connected to this u.FL Connector via a 50 Ω RF adapter cable.
- The design of the 50 Ω microstrip RF trace on the customer's PCB is crucially important.




Compliant operation of the LBES5PL2EL module is dependent on proper construction of this 50 Ω line and the following guidelines must be followed to ensure legal operation of the product.

The diagram in **Figure 18** shows the required microstrip structure to be routed between module pin 15, 23, and the u.FL connector.

The top PCB trace carries the RF energy from module to UFL connector.


Figure 18: Antenna with u.FL Connector Layout Guide (ISED)

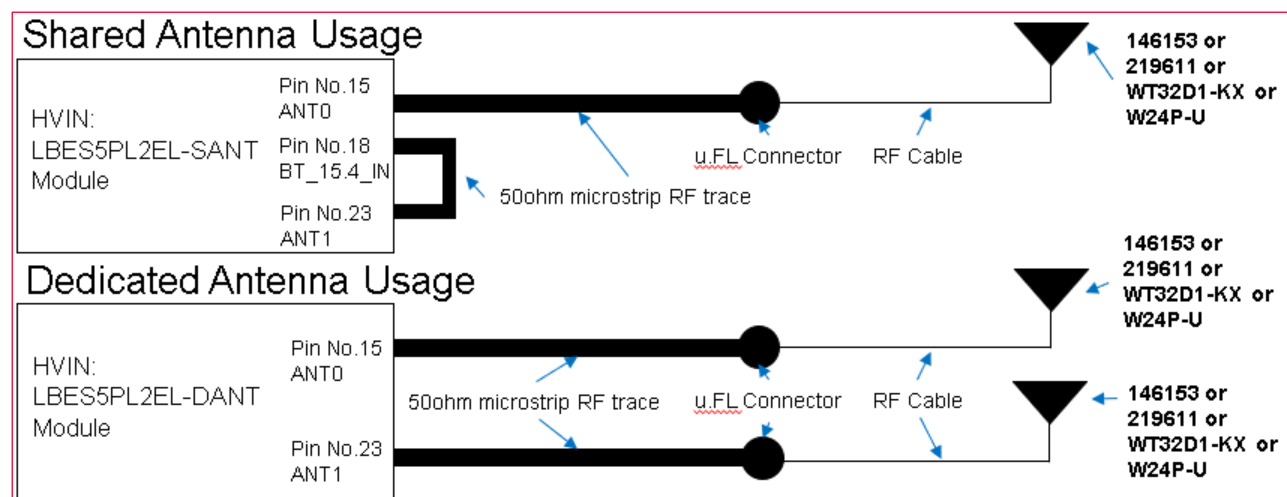

50 Ω microstrip RF trace: Murata provides set makers with Gerber data or something similar.

As shown in **Figure 19** the Layer2 ground plane provides a return path for the circuit. The Dielectric material (along with the dimensions of the microstrip structures) determines the characteristic impedance of the microstrip transmission line.

Figure 19: Microstrip RF Trace Structure (ISED)

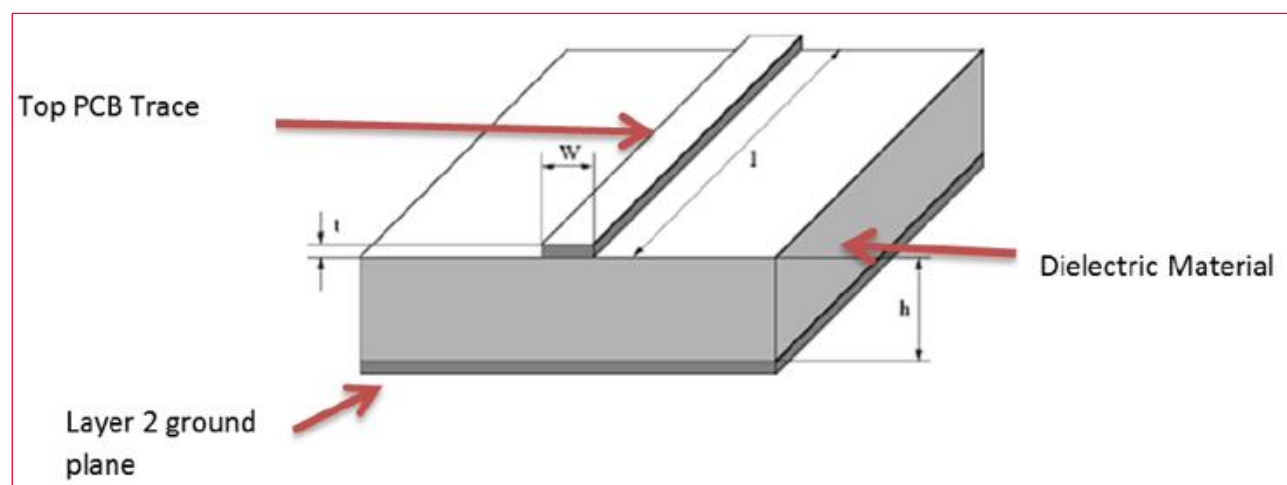

Note the representative dimensions shown in the drawing above. It is imperative that the module customer (the integrator) use the exact dimensions we recommend ensuring a 50 Ω impedance for this transmission line.

The following dimensions and/or ratios should be used to set the microstrip impedance to 50 Ω :

- **Dielectric (PCB) Material:** We recommend standard FR4 PCB material. Other dielectrics will work but will require recalculation of microstrip dimensions.

The following guidance is predicated on the use of FR4 Dielectric:

- If FR4 is not used for PCB material, please contact Murata to determine new dimensions for microstrip structure.
- **h (Dielectric Height):** This is the thickness of dielectric between the trace layer (layer 1) and the ground plane on layer 2.



Note that layer 2 must be electrical ground. We recommend a dielectric thickness of 8-15 mils. This range provides the customer with some flexibility in board construction.

- **t (trace thickness):** Microstrip impedance is not severely affected by the thickness dimension. Standard 102 or 202 copper deposition is recommended. Equivalent thickness is 1-2 mils.
- **W (trace width):** this is the crucial dimension. This width must be set correctly to obtain the desired 50 Ω impedance.

When using FR-4 dielectric, the width (W) of the microstrip trace should be set to: $W = H * 1.8$, where W is microstrip trace width and H is Dielectric height. Note that both values must be measured in identical units (mils or mm).

Example:

H = 12 mils, $W = 12 * 1.8 = 21.6$ mils

H = 0.4 mm, $W = 0.4 * 1.8 = 0.72$ mm

- **l (trace length):** the impedance of the microstrip line is not dependent on its length. However, regulatory and performance limitations practically determine the actual length to be used by the customer (integrator).



The length of this microstrip line must be longer than 7 mm to mimic the length used during FCC/ISED certification of the LBES5PL2EL (LBEE5PL2DL) module.
Lengths longer than 7 mm are acceptable although additional signal loss will occur as a result.

Given these restrictions, Murata recommends microstrip trace lengths between 7 mm and 25 mm.

In any event, the microstrip line must operate over the same Dielectric-Ground Plane configuration shown above to act as a 50 Ω transmission line.



Do not run the microstrip trace through sections of PCB that do not have the Dielectric-Ground plane configuration shown above.

A reliable 50 Ω transmission line will be produced if the above guidance is closely followed.



Any deviations from the guidance above may cause the module to operate in noncompliant manner.

Any implementation questions or concerns should be directed to Murata module technical support.

2.2.9 About Power Supply (Limited Condition)

This Module (LBES5PL2EL) has been approved as Limited Modular Approval.

These modules do not have a voltage stabilizing circuit in the power path to the internal RF circuitry. Therefore, the Limited Condition must provide a stable power supply for the supply voltage to the module.

Please supply a stable power supply so that the voltage shown in the table below is applied.

The power supply voltages are described in .

Table 42: Power Supply Voltages (ISED)

Parameter		Minimum	Typical	Maximum	Unit
Supply Voltage	AVDD33	3.14	3.3	3.46	V
	AVDD18	1.71	1.8	1.89	V
	VIO	1.71 3.14	1.8 3.3	1.89 3.46	V
	SD_VIO	1.71 3.14	1.8 3.3	1.89 3.46	V

2.3 EU

The following report is issued:

Only the Antenna Terminated Conducted test section of each report is available for TCF of the final product.

The radiation characteristic data should be acquired by you in the final product.

Radio Equipment Directive (RED) 2014/53/EU Article 3.2

Conforms to: EN 300 328 v2.2.2:2019

Report No.: TERF2211002503E2

Report No.: TERF2211002504E2

Report No.: TERF2211002505E2

EN 301 893 v2.1.1:2017

Report No.: TERF2211002506E2

Report No.: TERF2211002507E2

EN 300 440 v2.1.1:2017

Report No.: TERF2211002508E2

Report No.: TERF2211002509E2

Radio Equipment Directive (RED) 2014/53/EU Article 3.1a

Conforms to: EN 62311:2020

Report No.: TESA2304000207ES

Product name: Communication Module

Model: LBEE5PL2DL

Manufacture: Murata manufacturing Co., Ltd.

When shipping final products with this module to Europe, make a self-declaration that the product complies with European regulations and apply the CE mark.

2.3.1 Setting RF Power for Europe at 25 °C

This section describes the RF power settings.

2.3.1.1 RF Power Setting for 2.4 GHz WLAN

Parameters of RF Power Settings are described in the following tables.

Table 43: WLAN RF Power Setting - 2.4 GHz (EU)

Mode	Rate/MCS index	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11b	All Rate	1 ~ 13	13.0 ± 2.0
IEEE 802.11g	All Rate	1 ~ 13	14.0 ± 2.0
IEEE 802.11n (HT20)	All MCS index	1 ~ 13	14.0 ± 2.0
IEEE 802.11n (HT40)	All MCS index	3 ~ 11	14.0 ± 2.0
IEEE 802.11ac (VHT20)	All MCS index	1 ~ 13	14.0 ± 2.0
IEEE 802.11ac (VHT40)	MCS0 ~ MCS7	3 ~ 11	14.0 ± 2.0
	MCS8 ~ MCS9	3 ~ 11	13.0 ± 2.0

Table 44: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE20) (EU)

Mode	Rate / MCS index	Channel	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	MCS0 ~ MCS7	1 ~ 13	SU	14.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
	MCS8 ~ MCS11	1 ~ 13	SU	13.0 ± 2.0		
					242 tone (Full tone)	13.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0

Table 45: WLAN RF Power Setting - 2.4 GHz 802.11ax (HE40) (EU)

Mode	Rate / MCS index	Channel	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	MCS0 ~ MCS7	3 ~ 11	SU	14.0 ± 2.0		
					484 tone (Full tone)	14.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
					242 tone	14.0 ± 2.0
	MCS8 ~ MCS11	3 ~ 11	SU	13.0 ± 2.0		
					484 tone (Full tone)	13.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
					242 tone	13.0 ± 2.0

2.3.1.2 RF Power Setting for BT (BR/EDR) / BLE

RF power settings for BT (BR/EDR) and BLE are described in .

Table 46: BT (BR/EDR / BLE RF Power Setting (EU)

Mode	Channel	Maximum Tune Up Tolerance (dBm)
BR	NA	3.0 ± 3.0
EDR	NA	0.0 ± 3.0
LE	NA	3.0 ± 3.0
LE 2 Mbps	NA	3.0 ± 3.0

2.3.1.3 RF Power Setting for 5 GHz WLAN (W52/W53/W56)

RF power settings for 5 GHz WLAN (W52/W53/W56) are described in the following tables.

Table 47: WLAN RF Power Setting - 5 GHz 802.11a/n/ac for Channels 36 ~ 140 (EU)

Mode	Rate/MCS Index	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11a	All Rate	36 ~ 140	15.0 ± 2.0
IEEE 802.11n (HT20)	All MCS index	36 ~ 140	14.0 ± 2.0
IEEE 802.11n (HT40)	All MCS index	38 ~ 134	14.0 ± 2.0
IEEE 802.11ac (VHT20)	All MCS index	36 ~ 140	14.0 ± 2.0
IEEE 802.11ac (VHT40)	MCS0 ~ MCS7	38 ~ 134	14.0 ± 2.0
	MCS8 ~ MCS9	38 ~ 134	12.0 ± 2.0
IEEE 802.11ac (VHT80)	MCS0 ~ MCS7	42 ~ 122	14.0 ± 2.0
	MCS8 ~ MCS9	42 ~ 122	12.0 ± 2.0

Table 48: WLAN RF Power Setting - 5 GHz 802.11ax (HE20) for Channels 36 ~ 140 (EU)

Mode	MCS Index	Channel	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	MCS0 ~ MCS7	36 ~ 140	SU	14.0 ± 2.0		
					242 tone (Full tone)	14.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
	MCS8 ~ MCS9	36 ~ 140	SU	12.0 ± 2.0		
					242 tone (Full tone)	12.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
	MCS10 ~ MCS11	36 ~ 140	SU	10.0 ± 2.0		
					242 tone (Full tone)	10.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	10.0 ± 2.0

Table 49: WLAN RF Power Setting - 5 GHz 802.11ax (HE40) for Channels 38 ~ 134 (EU)

Mode	MCS Index	Channel	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE40)	MCS0 ~ MCS7	38 ~ 134	SU	14.0 ± 2.0		
					484 tone (Full tone)	14.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
					242 tone	14.0 ± 2.0
	MCS8 ~ MCS9	38 ~ 134	SU	12.0 ± 2.0		
					484 tone (Full tone)	12.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
					242 tone	12.0 ± 2.0
	MCS10 ~ MCS11	38 ~ 134	SU	10.0 ± 2.0		
					484 tone (Full tone)	10.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0

Table 50: WLAN RF Power Setting - 5 GHz 802.11ax (HE80) for Channels 42 ~ 122 (EU)

Mode	MCS Index	Channel	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE80)	MCS0 ~ MCS7	42~122	SU	14.0 ± 2.0		
					996 tone (Full tone)	14.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
					242 tone	14.0 ± 2.0
					484 tone	14.0 ± 2.0
	MCS8 ~ MCS9	42 ~ 122	SU	12.0 ± 2.0		
					996 tone (Full tone)	12.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	12.0 ± 2.0
					242 tone	12.0 ± 2.0
					484 tone	12.0 ± 2.0
	MCS10 ~ MCS11	42 ~ 122	SU	10.0 ± 2.0		
					996 tone (Full tone)	10.0 ± 2.0
					26 tone	7.0 ± 2.0
					52 tone	9.0 ± 2.0
					106 tone	10.0 ± 2.0
					242 tone	10.0 ± 2.0
					484 tone	10.0 ± 2.0

2.3.1.4 RF Power Setting for 5 GHz WLAN (W58)

RF power settings for 5 GHz WLAN (W58) are described in the following tables.

Table 51: WLAN RF Power Setting - 5 GHz 802.11 a/n/ac for Channels 149 ~ 169 (EU)

Mode	Rate/MCS Index	Channel	Maximum Tune Up Tolerance (dBm)
IEEE 802.11a	All Rate	149 ~ 169	4.0 ± 2.0
IEEE 802.11n (HT20)	All MCS index	149 ~ 169	4.0 ± 2.0
IEEE 802.11n (HT40)	All MCS index	149 ~ 169	4.0 ± 2.0
IEEE 802.11ac (VHT20)	All MCS index	149 ~ 169	4.0 ± 2.0
IEEE 802.11ac (VHT40)	All MCS index	151 ~ 167	4.0 ± 2.0
IEEE 802.11ac (VHT80)	All MCS index	155	4.0 ± 2.0

Table 52: WLAN RF Power Setting - 5 GHz 802.11ax for Channels 149 ~ 169 (EU)

Mode	MCS Index	Channel	SU	Maximum Tune Up Tolerance (dBm)	RU	Maximum Tune Up Tolerance (dBm)
IEEE 802.11ax (HE20)	All MCS index	149 ~ 169	SU	4.0 ± 2.0		
					242 tone (Full tone)	4.0 ± 2.0
					26 tone	4.0 ± 2.0
					52 tone	4.0 ± 2.0
					106 tone	4.0 ± 2.0
IEEE 802.11ax (HE40)	All MCS index	151 ~ 159	SU	4.0 ± 2.0		
					484 tone (Full tone)	4.0 ± 2.0
					26 tone	4.0 ± 2.0
					52 tone	4.0 ± 2.0
					106 tone	4.0 ± 2.0
					242 tone	4.0 ± 2.0
IEEE 802.11ax (HE80)	All MCS index	155	SU	4.0 ± 2.0		
					996 tone (Full tone)	4.0 ± 2.0
					26 tone	4.0 ± 2.0
					52 tone	4.0 ± 2.0
					106 tone	4.0 ± 2.0
					242 tone	4.0 ± 2.0
					484 tone	4.0 ± 2.0

2.3.2 Theory of Operation

describes the theory of operation.

Table 53: Theory of Operation (EU)

Frequency of Operation			Scan	Ad hoc Mode
2.4 GHz	11b/g/n/ac/ax(BW20)	2412-2472 MHz	Active	Yes
	11n/ac/ax(BW40)	2422-2462 MHz	Active	Yes
	BT	2402-2480 MHz	N/A	N/A
	BLE	2402-2480 MHz	N/A	N/A
W52	11a/n/ac/ax (BW20)	5180-5240 MHz	Active	Yes
	11n/ac/ax (BW40)	5190-5230 MHz	Active	Yes
	11ac/ax (BW80)	5210 MHz	Active	Yes
W53 ⁴	11a/n/ac/ax (BW20)	5260-5320 MHz	Passive	No
	11n/ac/ax (BW40)	5270-5310 MHz	Passive	No
	11ac/ax (BW80)	5290 MHz	Passive	No
W56 ⁴	11a/n/ac/ax (BW20)	5500-5700 MHz	Passive	No
	11n/ac/ax (BW40)	5510-5670 MHz	Passive	No
	11ac/ax (BW80)	5530-5610 MHz	Passive	No
W58	11a/n/ac/ax (BW20)	5745-5845 MHz	Active	Yes
	11n/ac/ax (BW40)	5755-5835 MHz	Active	Yes
	11ac/ax(BW80)	5775MHz	Active	Yes

2.4 Japan

- **Manufacturer Name:** Murata Manufacturing Co.,Ltd.
- **Model or Product Name:** LBES5PL2DL

This module has received "CERTIFICATION for TYPE CERTIFICATION" under the Japanese Radio Act.

電波法の要求に基づく警告

(警告) 5 GHz の周波数帯においては、5.2 GHz/5.3GHz/5.6GHz 帯 (W52/W53/W56)の 3 種類の帯域を使用することができます。5.2 GHz/5.3 GHz 帯無線 LAN (W52/W53)の屋外使用は 5.2GHz 帯高出力データ通信システムの基地局又は陸上移動中継局と通信する場合を除き電波法で禁止されています。

English Translation

Warning based on the requirements of Japanese Radio Act.

(Warning) In the 5GHz frequency band, you can use 3 bands: 5.2GHz/5.3GHz/5.6GHz(W52/W53/W56).

Outdoor use of 5.2 GHz/5.3 GHz band wireless LANs(W52/W53) is prohibited by the Radio Act except when communicating with 5.2 GHz band high-power data communication system base stations or land mobile relay stations.

⁴ DFS MASTER function not available.
DFS client function available.
There is a TPC function.

**R 001-P02019**

W52/53 は屋内使用限定

2.4 GHz と 5 GHz (W52,W53,W56)で使用するモジュールです
W53/W56 は子局としてのみ動作させてください。

English Translation

This is a module for use at 2.4 GHz and 5 GHz (W52, W53, W56).
Operate the W53/W56 only as a client mode.

2.4.1 Product Outline

This specification characterizes the IEEE 802.11 a/b/g/n/ac/ax + Bluetooth BR/EDR/LE dual-radio solution combo module.

- **Product Size:** 8.8 x 7.7 mm (Typical), H = 1.3 mm (Maximum)
- **Wireless-IC:** NXP IW611 inside
- **Reference Clock:** 40 MHz X'tal

Weight: 0.22 g

2.4.2 Feature

- **Product Name:** Communication Module
- **Model Name:** LBEE5PL2DL
- **Purpose of the equipment:** Telecommunication
- **Equipment Type:** Transceiver
- **Frequency band:** 2412-2472 MHz/ 2402-2480 MHz/ 2405-2480 MHz/
5180-5320 MHz/ 5500-5720 MHz
- **Channel:** (WLAN) 1 ~ 13ch/ 36 ~ 64ch/ 100 ~ 144ch
(BT) 1 ~ 79ch (BLE) 1 ~ 40ch
- **Bandwidth:** (WLAN) 2.4 GHz 11b(20 MHz)/11g (20 MHz)/11n (20 MHz)
5G Hz 11a(20 MHz) / 11n(20/40MHz) / 11ac(20/40/80MHz) / 11ax(20/40/80 MHz)
(BT) Hopping off 1MHz / Hopping on 79 MHz
(BLE) 2 MHz
- **Input Voltage to RF parts:** AVDD33 Typ. 3.3V
AVDD18 Typ. 1.8V

2.4.3 Setting RF Power

This section describes the RF power settings.

2.4.3.1 RF Power Settings for 2.4 GHz WLAN

RF Power Settings for 2.4 GHz WLAN are described in the following tables.

Table 54: WLAN RF Power Setting - 11b SS Technique (Direct Sequence Spread Spectrum) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)

No.	Bit Rate	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	1 Mbps	DBPSK	G1D	15
2	2 Mbps	DQPSK	G1D	15
3	5.5 Mbps	CCK	G1D	15
4	11 Mbps	CCK	G1D	15

Table 55: WLAN RF Power Setting - 11g Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)

No.	Bit Rate	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	6 Mbps	BPSK	G1D	16
2	9 Mbps	BPSK	G1D	16
3	12 Mbps	QPSK	G1D	16
4	18 Mbps	QPSK	G1D	16
5	24 Mbps	16 QAM	G1D	16
6	36 Mbps	16 QAM	G1D	16
7	48 Mbps	64 QAM	G1D	16
8	54 Mbps	64 QAM	G1D	16

Table 56: WLAN RF Power Setting - 11n HT20 Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	15
2	MCS1	QPSK	G1D	15
3	MCS2	QPSK	G1D	15
4	MCS3	16 QAM	D1D	15
5	MCS4	16 QAM	D1D	15
6	MCS5	64 QAM	D1D	15
7	MCS6	64 QAM	D1D	15
8	MCS7	64 QAM	D1D	15

Table 57: WLAN RF Power Setting - 11n HT40 Modulation (OFDM) - 2422 MHz ~ 2462 MHz (5 MHz interval 9 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	15
2	MCS1	QPSK	G1D	15
3	MCS2	QPSK	G1D	15
4	MCS3	16 QAM	D1D	15
5	MCS4	16 QAM	D1D	15
6	MCS5	64 QAM	D1D	15
7	MCS6	64 QAM	D1D	15
8	MCS7	64 QAM	D1D	15

Table 58: WLAN RF Power Setting – 11ac VHT20 Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	15
2	MCS1	QPSK	G1D	15
3	MCS2	QPSK	G1D	15
4	MCS3	16 QAM	D1D	15
5	MCS4	16 QAM	D1D	15
6	MCS5	64 QAM	D1D	15
7	MCS6	64 QAM	D1D	15
8	MCS7	64 QAM	D1D	15
9	MCS8	256 QAM	D1D	15

Table 59: WLAN RF Power Setting – 11ac VHT40 Modulation (OFDM) - 2422 MHz ~ 2462 MHz (5 MHz interval 9 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	15
2	MCS1	QPSK	G1D	15
3	MCS2	QPSK	G1D	15
4	MCS3	16 QAM	D1D	15
5	MCS4	16 QAM	D1D	15
6	MCS5	64 QAM	D1D	15
7	MCS6	64 QAM	D1D	15
8	MCS7	64 QAM	D1D	15
9	MCS8	256 QAM	D1D	13
10	MCS9	256 QAM	D1D	13

Table 60: 11ax HE20 Modulation (OFDM) - 2412 MHz ~ 2472 MHz (5 MHz interval 13 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	15
2	MCS1	QPSK	G1D	15
3	MCS2	QPSK	G1D	15
4	MCS3	16 QAM	D1D	15
5	MCS4	16 QAM	D1D	15
6	MCS5	64 QAM	D1D	15
7	MCS6	64 QAM	D1D	15
8	MCS7	64 QAM	D1D	15
9	MCS8	256 QAM	D1D	13
10	MCS9	256 QAM	D1D	13
11	MCS10	1024 QAM	D1D	13
12	MCS11	1024 QAM	D1D	13

Table 61: 11ax HE40 Modulation (OFDM) - 2422 MHz ~ 2462 MHz (5 MHz interval 9 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	15
2	MCS1	QPSK	G1D	15
3	MCS2	QPSK	G1D	15
4	MCS3	16 QAM	D1D	15
5	MCS4	16 QAM	D1D	15
6	MCS5	64 QAM	D1D	15
7	MCS6	64 QAM	D1D	15
8	MCS7	64 QAM	D1D	15
9	MCS8	256 QAM	D1D	13
10	MCS9	256 QAM	D1D	13
11	MCS10	1024 QAM	D1D	13
12	MCS11	1024 QAM	D1D	13

2.4.3.2 RF Power Setting for BT (BR/EDR) / BLE

RF power settings for BT (BR/EDR) and BLE are described in the following tables.

Table 62: BR/EDR Modulation (Spread Spectrum Frequency Hopping System 1600 hops/sec) - 2441 MHz (Japan)

No.	Mode	Modulation System	Type of Radio Wave	Frequency Equal to the Transmission Rate of the Modulated Signal (MHz)	Transmission Rate [Kbps]	Setting Power (dBm)/Port
1	BR	GFSK	F1D	1	720	12, 5
2	EDR	$\pi/4$ DQPSK	G1D	1	1440	5, 2
3	EDR	8DPSK	G1D	1	2160	5, 2

Table 63: BLE Modulation (Spread Spectrum Frequency Hopping System) - 2402 MHz (2 MHz Interval 40 Waves) (Japan)

No.	Mode	Modulation System	Type of Radio Wave	Transmission Rate (Mbps)	Setting Power (dBm)/Port
1	LE 1 Mbps	GFSK	F1D	1	5
2	LE 2 Mbps	GFSK	F1D	2	5

2.4.3.3 RF Power Setting for 5 GHz WLAN

RF power settings for 5 GHz WLAN are described in the following tables.

Table 64: 11a Modulation (OFDM) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)

No.	Bit Rate	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	6 Mbps	BPSK	G1D	14	14
2	9 Mbps	BPSK	G1D	14	14
3	12 Mbps	QPSK	G1D	14	14
4	18 Mbps	QPSK	G1D	14	14
5	24 Mbps	16 QAM	D1D	14	14
6	36 Mbps	16 QAM	D1D	14	14
7	48 Mbps	64 QAM	D1D	14	14
8	54 Mbps	64 QAM	D1D	14	14

Table 65: 11n HT20 Modulation (OFDM) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13

Table 66: 11n HT40 Modulation (OFDM) 5190 MHz ~ 5310 MHz (40 MHz Interval 4 Waves) 5510 MHz ~ 5710 MHz (40 MHz Interval 6 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13

Table 67: 11ac VHT20 Modulation (OFDM) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13
9	MCS8	256 QAM	D1D	13	13

Table 68: 11 ac VHT40 Modulation (OFDM) - 5190 MHz ~ 5310 MHz (40 MHz Interval 4 Waves), 5510 MHz ~ 5710 MHz (40 MHz Interval 6 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13
9	MCS8	256 QAM	D1D	12	12
10	MCS9	256 QAM	D1D	12	12

Table 69: 11ac VHT80 Modulation (OFDM) - 5210 MHz, 5290 MHz (80 MHz Interval 2 Waves), 5530 MHz ~ 5690 MHz (80 MHz Interval 3 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13
9	MCS8	256 QAM	D1D	12	12
10	MCS9	256 QAM	D1D	12	12

Table 70: 11ax HE20 Modulation (OFDMA) - 5180 MHz ~ 5320 MHz (20 MHz Interval 8 Waves), 5500 MHz ~ 5720 MHz (20 MHz Interval 12 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
8	MCS7	64 QAM	D1D	13	13
9	MCS8	256 QAM	D1D	12	12
10	MCS9	256 QAM	D1D	12	12
11	MCS 10	1024 QAM	D1D	10	10
12	MCS 11	1024 QAM	D1D	10	10

Table 71: 11ax HE40 Modulation (OFDMA) - 5190 MHz ~ 5310 MHz (40 MHz Interval 4 Waves), 5510 MHz ~ 5710 MHz (40 MHz Interval 6 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13
9	MCS8	256 QAM	D1D	12	12
10	MCS9	256 QAM	D1D	12	12
11	MCS10	1024 QAM	D1D	10	10
12	MCS11	1024 QAM	D1D	10	10

Table 72: 11ax HE80 Modulation (OFDMA) - 5210 MHz, 5290 MHz (80 MHz Interval 2 Waves), 5530 MHz ~ 5690 MHz (80 MHz Interval 3 Waves) (Japan)

No.	MCS Index	Modulation System	Type of Radio Wave	W52/W53	W56
				Setting Power (dBm/port)	Setting Power (dBm)/port
1	MCS0	BPSK	G1D	13	13
2	MCS1	QPSK	G1D	13	13
3	MCS2	QPSK	G1D	13	13
4	MCS3	16 QAM	D1D	13	13
5	MCS4	16 QAM	D1D	13	13
6	MCS5	64 QAM	D1D	13	13
7	MCS6	64 QAM	D1D	13	13
8	MCS7	64 QAM	D1D	13	13
9	MCS8	256 QAM	D1D	12	12
10	MCS9	256 QAM	D1D	12	12
11	MCS10	1024 QAM	D1D	10	10
12	MCS11	1024 QAM	D1D	10	10

2.4.3.4 Theory of Operation

describes the theory of operation.

Table 73: Theory of Operation (Japan)

Frequency of Operation			Scan	Ad hoc Mode
2.4GHz	11b/g/n/ac/ax(BW20)	2412-2472 MHz	Active	Yes
	11n/ac/ax(BW40)	2422-2462 MHz	Active	Yes
	BT	2402-2480 MHz	N/A	N/A
	BLE	2402-2480 MHz	N/A	N/A
W52	11a/n/ac/ax (BW20)	5180-5240 MHz	Active	Yes
	11n/ac/ax (BW40)	5190-5230 MHz	Active	Yes
	11ac/ax (BW80)	5210 MHz	Active	Yes
W53	11a/n/ac/ax (BW20)	5260-5320 MHz	Passive	No
	11n/ac/ax (BW40)	5270-5310 MHz	Passive	No
	11ac/ax (BW80)	5290 MHz	Passive	No
W56	11a/n/ac/ax (BW20)	5500-5720 MHz	Passive	No
	11n/ac/ax (BW40)	5510-5710 MHz	Passive	No
	11ac/ax (BW80)	5530-5690 MHz	Passive	No

DFS MASTER function not available.

DFS client function available.

There is a TPC function.

2.4.4 Antenna

The antenna models for Japan are described in .

Table 74: Antenna (Japan)

No.	Antenna Model Name	Antenna Type	Antenna Manufacturer	Peak Gain [dBi]	
				2.4-2.5GHz	5.15-5.85 MHz
1	146153	Dipole	Molex	3.2	4.25
2	219611	Dipole	Molex	2.67	3.67
3	WT32D1-KX	Dipole	Unictron	3.0	4.0
4	W24P-U ⁵	Dipole	Invetek	3.2	N/A
5	Type2EL_Antenna	Monopole	Murata	3.6	4.6
6	206994	Monopole	Molex	3.6	3.6



No.4 W24P-U can only be used at 2.4GHz band.

⁵ No.4 "W24P-U" can only be used at 2.4GHz band.

For No. 1 ~ No. 4 and No.6 antennas, obtain a data sheet from the antenna manufacturer's website as given below. Refer to [Section 2.4.5.1](#) for details of the No. 5 antenna from Murata.


- Molex Electronic Solutions
<https://www.molex.com/molex/home>
- Unictron Technologies Corp.
<https://www.unictron.com/>
- Inventek Systems, LLC.
<https://www.inventeksys.com/>

When using Type2EL_Antenna, make sure to match the drawings shown in **Figure 20**.

2.4.4.2 Appearance

Figure 21 shows the antenna appearance.


Figure 21: Type 2EL Antenna Appearance (Japan)

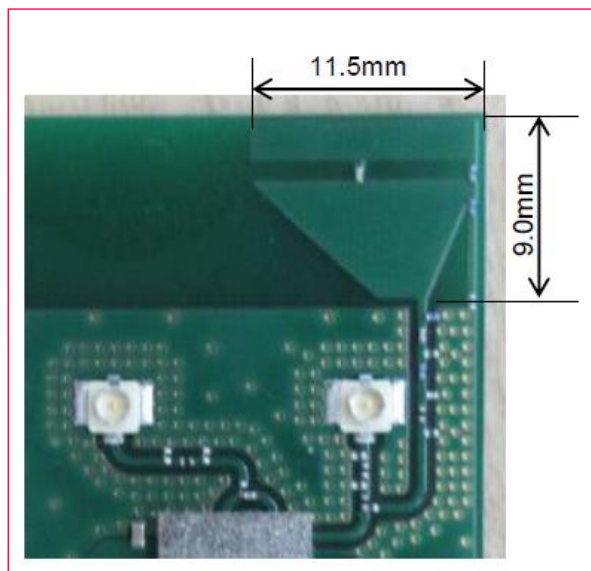

2.4.4.3 Measurement Directions

Figure 22 shows the measurement directions.


Figure 22: Antenna Measurement Directions (Japan)

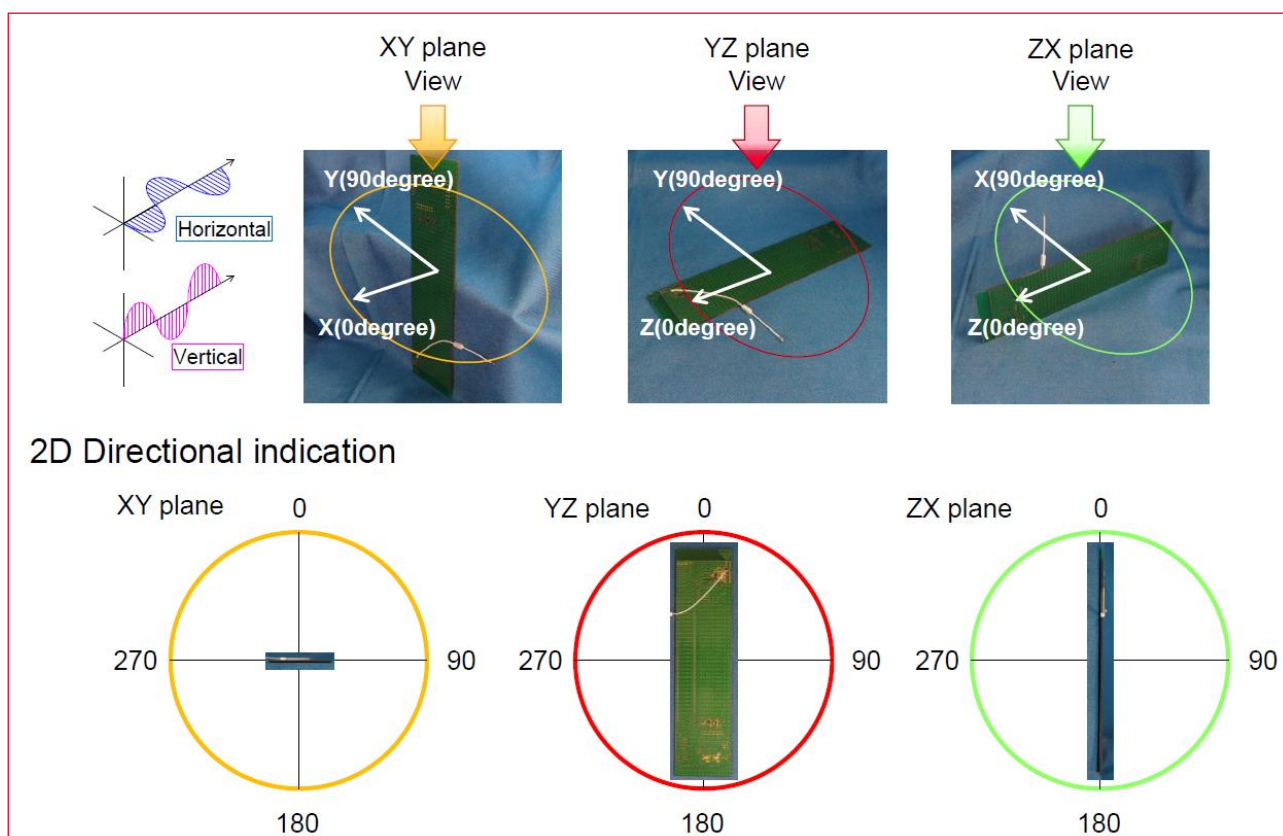

2.4.4.4 Measurement Result

The measurement results are shown in **Figure 23**.

Figure 23: Antenna Measurement Result (Japan)

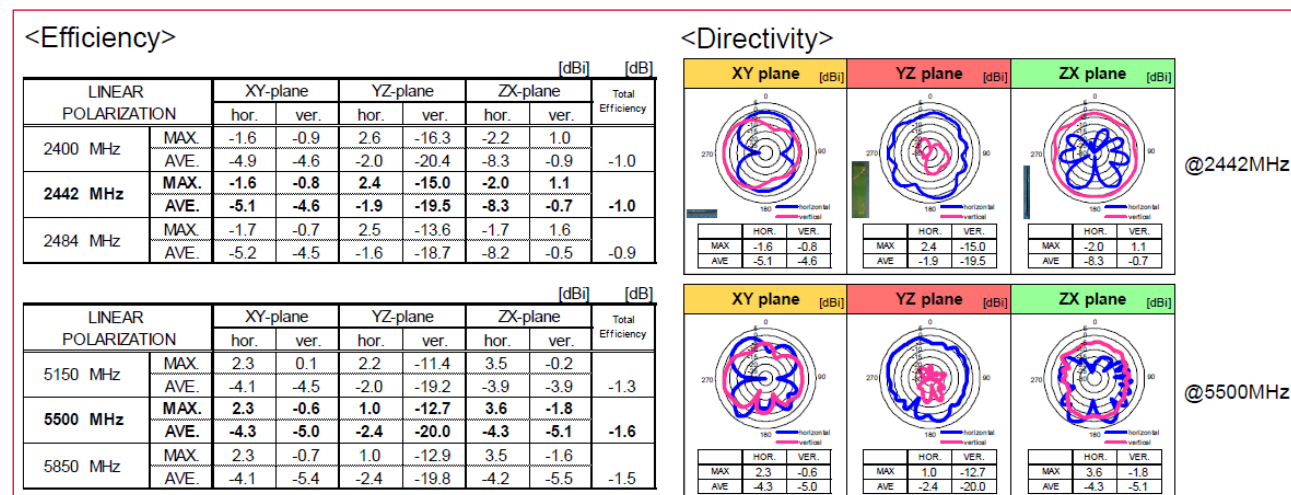

2.4.5 Notification

It is recommended that the indication of (1) or (2) below is described on the product incorporating this module in **Japanese**. If there is any problem with the indication of (1) or (2) on the product, we recommend to indicate (1) or (2) in the user manual or on the package of the product incorporating this module, or electronic display on the product. In the case of the electronic display, it is necessary to describe "using the electronic display" + "how to reach to below indication" in the user manual of the product.

(1)

本製品は、電波法に基づく工事設計認証(認証番号:001-P01965)を受けた特定無線設備を内蔵しています。

(2)



® 001-P02019

5.2 GHz / 5.3 GHz 帯無線 LAN (W52 / W53)の屋外使用は 5.2 GHz 帯高出力データ通信システムの基地局又は陸上移動中継局と通信する場合を除き電波法で禁止されています。

(English Translation)

(1)

This product incorporates specified radio equipment that has received CERTIFICATION for TYPE CERTIFICATION (certification number: 001-P01965) based on the Japan Radio Act.

(2)



® 001-P02019

Outdoor use of 5.2 GHz /5.3 GHz band wireless LANs (W52/W53) is prohibited by the Radio Act except when communicating with 5.2 GHz band high-power data communication system base stations or land mobile relay stations.

Revision History

Revision	Date	Author	Change Description
1.0	April 18, 2023	Issued as Application Note.	Initial Release
2.0	April 27, 2023	Page 7 and 32, Pin Layout	Correction of errors
3.0	May 12, 2023	Page 31, Removed "Monopole Antenna Gain: 3.6 dB i@ 2.4 GHz/3.6 dBi @ 5GHz"	Erasure of errors
4.0	Sep 15, 2023	2.4GHz Power table	Added 40MHz band power table



Copyright © Murata Manufacturing Co., Ltd. All rights reserved. The information and content in this document are provided “as-is” with no warranties of any kind and are for informational purpose only. Data and information have been carefully checked and are believed to be accurate; however, no liability or responsibility for any errors, omissions, or inaccuracies is assumed.

Wi-Fi® is a registered trademark of Wi-Fi Alliance. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. Other brand and product names are trademarks or registered trademarks of their respective owners.

Specifications are subject to change without notice.