

DC-DC转换器

数字设备和办公自动化设备




● 规格

| 品名 | 输入电压 (V) | 输出 1 | 输出 2 | 形状 | 尺寸 (mm) 长 × 宽 × 高 |
|-----------|--------------|-----------------|---------------|-----|----------------------|
| MPD0S001S | 3.0 to 3.6 | 5V/0.12A | — | SIP | 13×26×7 |
| MPD6S012S | 3.0 to 5.5 | 1.1至3.6V可变/3A | — | SIP | 21×21×9 |
| MPD6L002S | 3.0 to 5.5 | 1.1至3.6V可变/3A | 1.8至3.6V可变/1A | SMD | 8×32.4×23.7 |
| MPD5S021S | 4.5 to 16.0 | 3.3V/3A | — | SIP | 21×50×14 |
| MPD5S018S | 4.5 to 5.5 | 15.4V/0.6A (*1) | — | SIP | 17×50×14 |
| MPD3S010S | 11.4 to 12.6 | 3.4V/1.2A | — | SIP | 16×50×11 |
| MPD6S001S | 11.4 to 12.6 | 9V/1.2A | — | SIP | 16×50×11 |
| MPD4S007S | 16 to 18 | 3.3V/1.1A | 1.845V/0.5A | SIP | 23×33.5×10 |
| MPD6S019S | 4.5 to 5.5 | 1.1至3.6V可变/4.5A | — | SIP | 30×28×11 |

*1 超过60°C才会引起降额。

DC-DC转换器

通讯设备 (非隔离型)

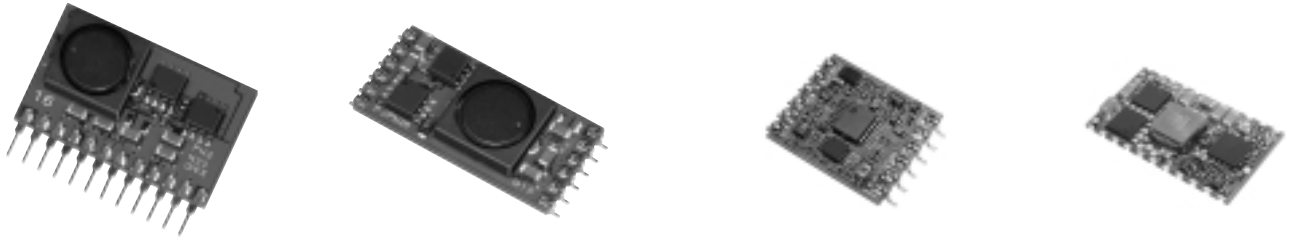


● 规格


| 系列 | 输入电压 (V) | 输出电压 (V) | 输出电流 (A) | 形状 | 尺寸 (mm) 长×宽×高 | 用途 |
|-----------|-------------|-------------------|----------|-----|------------------|---------------------------|
| MPDTY011S | 3.3 | 1.0 | 6 | SIP | 33.0×5.8×24.0 | 伺服器 路由器 转换设备 BTS |
| MPDTY012S | | 1.2 | | | | |
| MPDTY013S | | 1.5 | | | | |
| MPDTY014S | | 1.8 | | | | |
| MPDTY015S | | 2.0 | | | | |
| MPDTY016S | | 2.5 | | | | |
| MPDTY021S | 5.0 | 1.0 | 6 | | | |
| MPDTY022S | | 1.2 | | | | |
| MPDTY023S | | 1.5 | | | | |
| MPDTY024S | | 1.8 | | | | |
| MPDTY025S | | 2.0 | | | | |
| MPDTY026S | | 2.5 | | | | |
| MPDTY027S | 3.3 | | | | | |
| MPDTY111S | 3.3 | 1.0 | 6 | SMD | 33.8×15.4×6.0 | |
| MPDTY112S | | 1.2 | | | | |
| MPDTY113S | | 1.5 | | | | |
| MPDTY114S | | 1.8 | | | | |
| MPDTY115S | | 2.0 | | | | |
| MPDTY116S | | 2.5 | | | | |
| MPDTY121S | 5.0 | 1.0 | 6 | | | |
| MPDTY122S | | 1.2 | | | | |
| MPDTY123S | | 1.5 | | | | |
| MPDTY124S | | 1.8 | | | | |
| MPDTY125S | | 2.0 | | | | |
| MPDTY126S | | 2.5 | | | | |
| MPDTY127S | 3.3 | | | | | |
| MPDTY102S | 2.97 to 5.5 | 0.8 to Vin-0.5可变动 | 2 | SMD | 21.3×16.4×4.2 | |
| MPDTY301S | 5.0 | 0.8 to 3.3可变动 | 7 | SMD | 27.8×15.4×4.2 | |
| MPDTY302S | 3.3 | 0.8 to 2.5可变动 | | | | |
| MPDTY303S | 6.5 to 14 | 0.8 to 5.5可变动 | 8 | | | |
| MPDTY311S | 5.0 | 0.8 to 3.3可变动 | | | | |
| MPDTY312S | 3.3 | 0.8 to 2.5可变动 | 16 | | | |
| MPDTY411S | 5.0 | 0.8 to 3.3可变动 | 7 | SMD | 20.3×11.4×6.2 | |
| MPDTY412S | 3.3 | 0.8 to 2.5可变动 | | | | |
| MPDRX002S | 3.0 to 5.5 | 0.8 to 1.8可变动 | 16 | SMD | 33.0×13.5×8.0 | |
| MPDRX004S | 7.0 to 14.0 | 0.8 to 1.8可变动 | 12 | | | |

DC-DC转换器


通信设备 (隔离型)

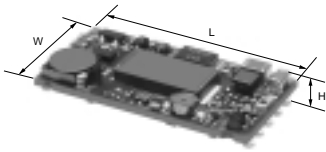

MPD5D01*S系列

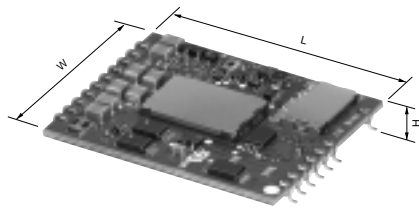

MPD6D10*S/11*S/00*S系列

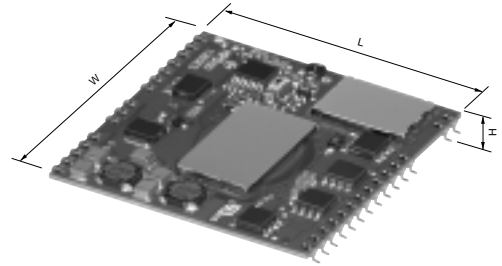

MPD6D12*S系列
MPD7D01*S系列

● 规格

| 功率 (W) | 输出的数量 | 系列 | 输入电压 (V) | 输出电压 (V) | 输出电流 (A) | 尺寸 (mm) 长 × 宽 × 高 | 重量 (g) | |
|--------|-------------|-------------|----------|---------------|----------|----------------------|--------|----|
| 5 | 1 | MPD5D01*S系列 | 48 | 3.3 | 1.5 | 26.8×14.6×4.2 | 8 | |
| | | | | 5.0 | 1 | | | |
| 10 | | MPD6D10*S系列 | | 1.5 | 3.5 | 39.9×22.4×4.0 | | |
| | | | | 1.8 | 3 | | | |
| | | | | 2.5 | | | | |
| | | | | 3.3 | | | | |
| | | | | 5.0 | | | | 2 |
| 15 | | MPD6D11*S系列 | | 1.5 | 5.2 | 39.9×31.2×4.0 | | 10 |
| | | | | 1.8 | 4.5 | | | |
| | | | | 2.5 | | | | |
| | | | | 3.3 | | | | |
| 20 | | MPD6D00*S系列 | | 5.0 | 3 | 39.9×31.2×4.5 | | 12 |
| | 1.5 | | 8 | | | | | |
| | 1.8 | | | | | | | |
| | 2.5 | | | 7 | | | | |
| | 3.3 | | | 6 | | | | |
| 30 | MPD6D12*S系列 | 5.0 | 4 | 45.0×45.0×4.2 | 18 | | | |
| | | 1.5 | 11 | | | | | |
| | | 1.8 | | | | | | |
| | | 2.5 | | | | 10 | | |
| | | 3.3 | | | | 9 | | |
| 50 | MPD7D01*S系列 | 3.3 | 15 | 45.0×45.0×4.5 | 18 | | | |
| | | 5.0 | 10 | | | | | |

最少订购数量：1000只

注：本PDF产品目录是从株式会社村田制作所网站中下载的。规格若有变更，或若其中产品停产，恕不另行通知。请在订购之前向我公司销售代表或产品工程师查询。
本PDF产品目录所记载的产品规格，因受篇幅的限制，只提供了主要产品资料。在您订购前，必须确认规格表内容，或者互换协商定案图。