

PRODUCT OVERVIEW

MWOCES-191-P-C is a 21.6kW, 19" 1U, OCP (V3) System Support that provides a delivery system for up to six 68mm, 1U [Power Supplies \(PSU\)](#), one [Remote Management Unit \(RMU\)](#) and intended for 50.5V/54.5V power distribution architectures. Two AC input connectors support either three-phase four-wire delta (without neutral) or three-phase five-wire wye (with neutral) configurations for added flexibility. Each input is configured to power a group of three power supply module slots. DC output connection is provided by pluggable bus bars.

ORDERING GUIDE		
Part Number ¹	Input Configuration	DC Output Busbar Configuration
MWOCES-191-P-C ²	✓ 3-Phase four wire Delta ✓ 3-Phase five wire Wye ✓ Single-Phase ✓ HVDC	Bar Clip

¹ Shelf does not include the power supply modules and RMU and needed to be ordered separately as required.

² Contact Murata for availability

FEATURES

- OCP System Support
- 1U height
- 448.6(W) x 720(L) x 44(H) mm
- 21.6kW total output power (N+0)
- Accommodates up to six PSU modules and one RMU
- 50.5/54.5V output
- PSU & RMU Hot-swappable
- N+1 / N+N Redundancy
- Designed to support BBU
- Four RJ45 ports with RMU
- Adaptable to 19" EIA rack
- 2-year warranty



For full details go to

www.murata.com/rohs



Certificate and Test Report



INPUT CHARACTERISTICS

Parameter	Conditions	Min	Nom.	Max.	Units
Input Voltage Operating Range	Line to Line (Delta source)	180	200/208/277	305	Vac
	Line to Line (Wye source with neutral connection)	312	346/360/480	528	
	HVDC	192	240/380	400	
Frequency	AC input	47	50/60	63	Hz
Input Current	Wye / Single-phase: 200-240Vac (Each input, per line)			23.5	Arms
	Delta : 200-240Vac (Each input, per line)			41.0	
	240-380Vdc (each input, per line)			23	Adc

OUTPUT CHARACTERISTICS

Parameter	Configuration	Min.	Typ.	Max. (At Output Voltage)		Units
				50.5 Vdc	54.5 Vdc	
Output Power	With six (6) PSUs	0		21,600	21,600	W
	With five (5) PSUs	0		18,000	18,000	
	With four (4) PSUs	0		14,400	14,400	
	With three (3) PSUs	0		10,800	10,800	
	With two (2) PSUs	0		7,200	7,200	
	With one (1) PSU	0		3,600	3,600	
Output Current	With six (6) PSUs	0		427.7	396	A
	With five (5) PSUs	0		356.5	330	
	With four (4) PSUs	0		285.2	264	
	With three (3) PSUs	0		213.9	198	
	With two (2) PSUs	0		142.6	132	
	With one (1) PSU	0		71.3	66	
Holdup Time	With six (6) PSUs [5+1]		14.4 (18kW)			ms
	With six (6) PSUs [3+3]		24 (10.8kW)			
	With five (5) PSUs [4+1]		15 (14.4kW)			
	With four (4) PSUs [3+1]		16 (10.8kW)			
	With four (4) PSUs [2+2]		24 (7.2kW)			
	With three (3) PSUs [2+1]		18 (7.2kW)			
	With two (2) PSUs [1+1]		24 (3.6kW)			
	With one (1) PSU		12 (3.6kW)			

ENVIRONMENTAL CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Storage Temperature Range	Non-operating	-40		70	°C
Operating Temperature Range	Altitude < 3,000m	0		40	
Storage Humidity	Non-condensing	10		90	%
Operating Humidity	Non-condensing	10		85	
Shock	Non-operating : 12G / Operating : 6G				
Vibration	Non-operating : Sinusoidal vibration, 5-500Hz, 1G Operating : Sinusoidal vibration, 5-500Hz, 0.5G				
Safety Approval	UL62368-1 : 2018 (3rd Edition) (Information Technology Equipment – safety – Part 1: General Requirements) CAN/CSA-C22.2 No. 62368-1 : 2018 (3rd Edition) (Information Technology Equipment – safety – Part 1: General Requirements) TUV : EN62368-1:2018 (3rd Edition) CQC : GB4943.1-2022 CB : IEC 62368-1:2018 (3rd Edition)				
Weight (Typical)	Shelf Only, without PSUs and RMU	10.5			Kg

ISOLATION CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Insulation Safety Rating/Test Voltage	Input to output - Reinforced	5,000			Vdc
	Input to chassis	2,500			
Isolation	Output to chassis	50			Vdc

EMISSION AND IMMUNITY


Parameter	Standard	Criteria
Input Current Harmonics	IEC/EN 61000-3-2	Class A
Conducted Emission	CISPR 22	Class A
ESD Immunity	IEC/EN 61000-4-2	Level 4 criteria A
Electrical Fast Transient/Burst Immunity	IEC/EN 61000-4-4	Level 3 criteria B
Surge Immunity	IEC/EN 61000-4-5	Level 3 criteria A

PRODUCT VIEWS AND CONNECTOR DETAILS

Front View




Rear View

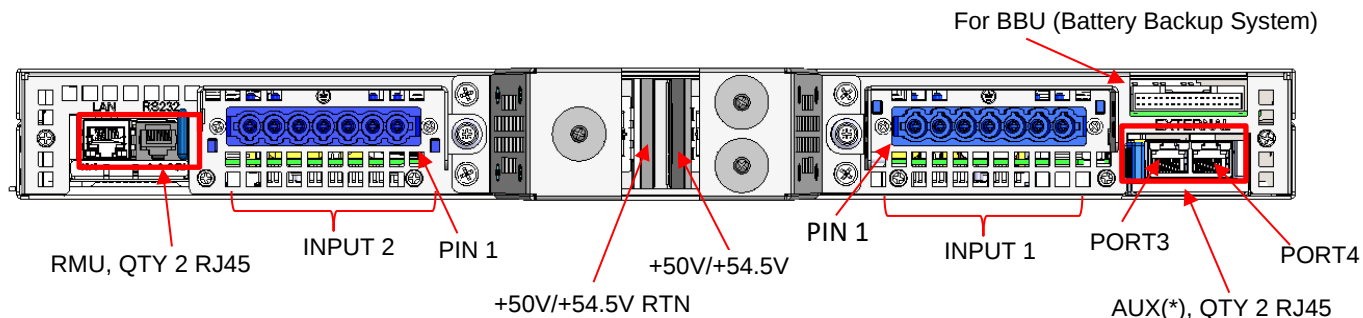


(*)Auxiliary board (AUX) is included with the power shelf.

RJ45 CONNECTOR PIN ASSIGNMENT (AUX PORT 3)



Pin	I/O	Function	Description
1	I	GND	-
2	O	PLS_F	Notification signal that at least one PSU AC input fault
3	O	BKP_F	Notification signal that at least one PSU is in FAULT state
4	-	-	-
5	-	-	-
6	-	-	-
7	-	-	-
8	-	-	-

RJ45 CONNECTOR PIN ASSIGNMENT (AUX PORT 4)



Pin	I/O	Function	Description
1	A	ISHARE	PSU current share signal
2	I	GND	-
3	I/O	SYNC_START	PSU activation signal
4	O	VOUT_SEL	Notification signal that PSU output voltage setting mode
5	I	GND	-
6	-	-	-
7	-	-	-
8	-	-	-


INPUT CONNECTOR PIN ASSIGNMENT (AC INPUT 1 & 2)

Positronic SP10RSSS48RM220A1-AA-2269 (Input 1) SP10RSSS48M220A1-AA-2269 (Input 2)
mating connector: Positronic SP10RSSS1F0W01/AA-2268


Wye Input			Delta Input			Single Input			HVDC Input		
PIN No	Signal	Function	PIN No	Signal	Function	PIN No	Signal	Function	PIN No	Signal	Function
1	L1	AC line voltage 1	1	L1	AC line voltage 1	1	L	AC live	1	(+ HVDC)	DC POSITIVE
2	N	Neutral	2	L2	AC line voltage 2	2	N	Neutral	2	(- HVDC)	DC RETURN
3	L2	AC line voltage 2	3	L2	AC line voltage 2	3	L	AC live	3	(+ HVDC)	DC POSITIVE
4	PE	Protective earth	4	PE	Protective earth	4	PE	Protective earth	4	PE	Protective earth
5	N	Neutral	5	L3	AC line voltage 3	5	N	Neutral	5	(- HVDC)	DC RETURN
6	L3	AC line voltage 3	6	L3	AC line voltage 3	6	L	AC live	6	(+ HVDC)	DC POSITIVE
7	N	Neutral	7	L1	AC line voltage 1	7	N	Neutral	7	(- HVDC)	DC RETURN

INTERNAL CONNECTION


Wye Input

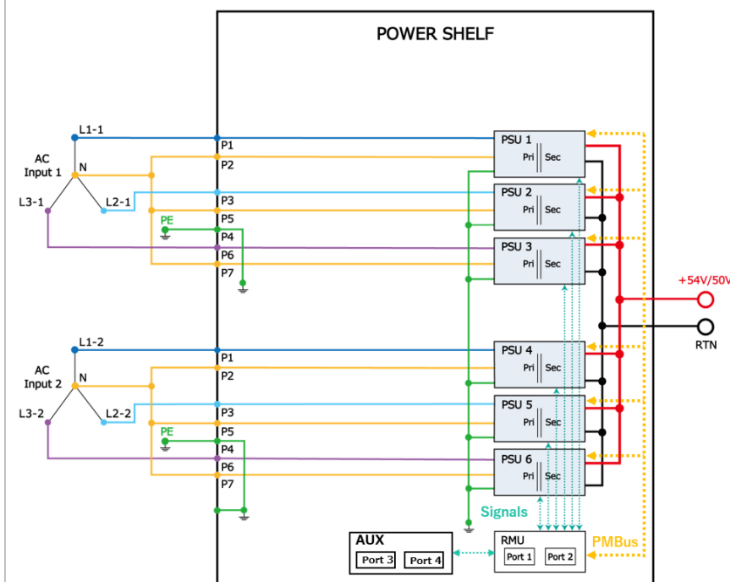

Delta Input

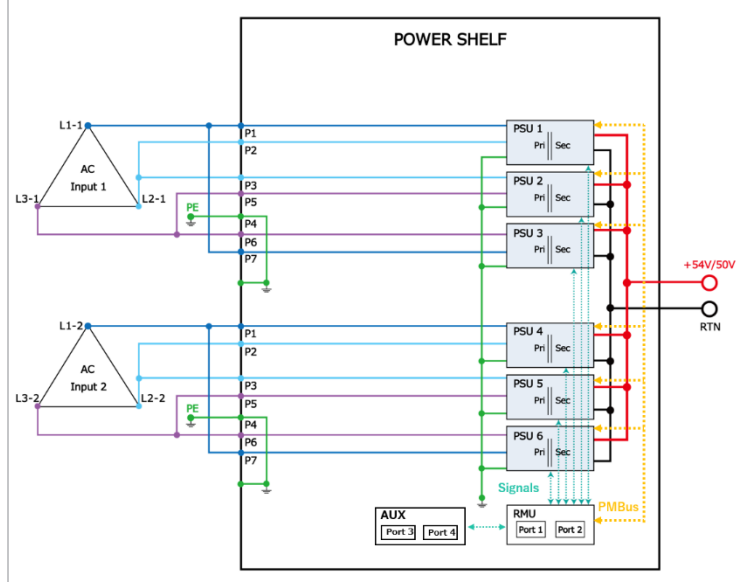

Single Phase & HVDC Input

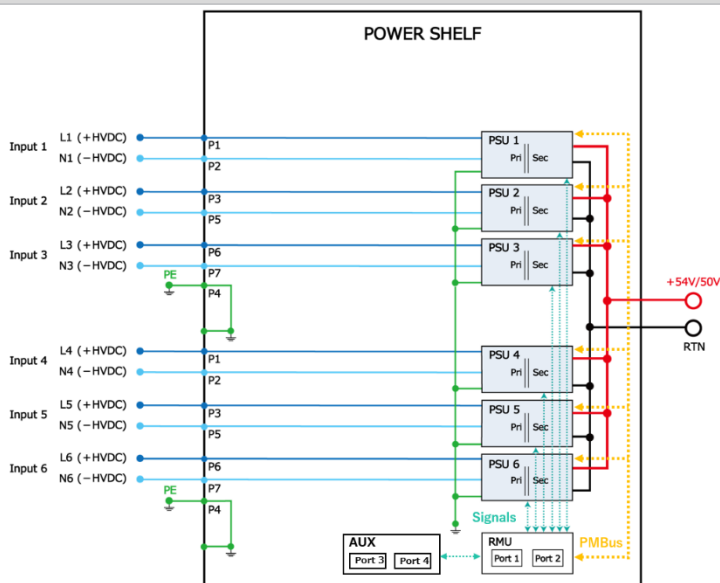

COMMUNICATION (WITH MWOC-RMU)


FUNCTION	DESCRIPTION
Control the units	ON/OFF control of each unit installed in the power shelf Select the power source line
Reporting to the host	ON/OFF Status and presence information of each unit Status of input power sources Fault information of each unit Input power and output power of PSUs Output power and SoC of the battery unit

COMMUNICATION (WITH MWOC-AUX)

FUNCTION	DESCRIPTION
Auxiliary power supply for 12V_SB	Outputs 12V from the bus voltage to back up the RMU during a power failure (requires for BBU)
Auxiliary Signal	Outputs signals such as current share, fault, output voltage switching (TBD)

Link Back To [Order Guide](#)

MECHANICAL DRAWING

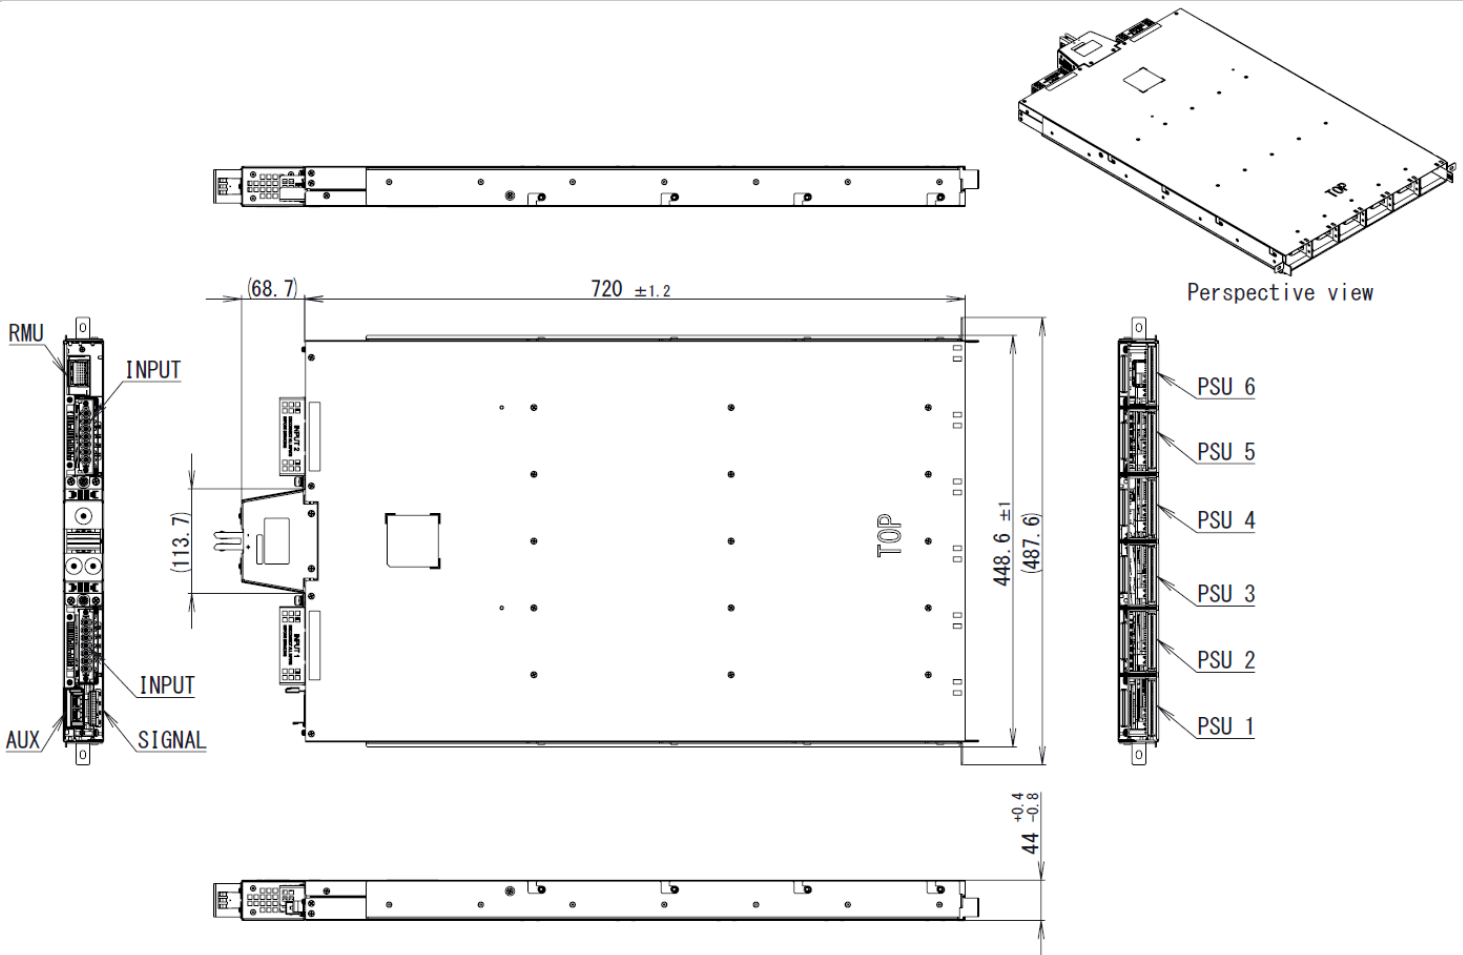

1. This drawing is a graphical representation of the product and may not show all fine details. Please contact Murata for 3D model details
2. Dimensions in mm

RELATED PRODUCT DATASHEETS

Document Number	Description	Click link below to open online datasheet
MWOC-RMU	Monitor and control unit	Link to: Datasheet
MWOC68-3600-B-RM	3.6kW/50V ac-dc front-end PSU module	Link to: Datasheet
MWOC68-3600-D-RM	3.6kW/54V ac-dc front-end PSU module	Link to: Datasheet
MWOC_BLANKING_PANELS	Blanking panel accessories	Link to: Datasheet

[back to the product overview](#)

Murata Power Solutions, Inc.
129 Flanders Road
Westborough, MA 01581
ISO 9001 REGISTERED



This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy. Refer to: <https://www.murata.com/requirements/>

Murata Power Solutions, Inc. ("Murata") makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify Murata, its affiliated companies, and its representatives against any damages arising out of the use of any Murata products in safety-critical applications. Specifications are subject to change without notice.

© 2023 Murata Power Solutions, Inc.