

Product Search Data Sheet


CSTCE18M0V13C99-R0

discontinued RoHS REACH

Applications

| Unsuitable | Please be sure to read and comply with |
|--------------------------|--|
| Applications | these "Precautions for use." |
| Specific Applications | Automotive powertrain/safety equipment |
| | Please refer to Our Website and |
| | specifications, etc. for information about |
| | the performance, functions, quality, |
| | management, and safety required for |
| | the above applications, and use |
| | Products after confirming the |
| | performance and reliability of the actual |
| | Product. |

Appearance & Shape

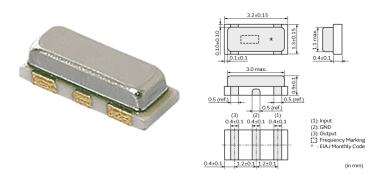

Note: This datasheet may be out of date. Please download the latest datasheet of CSTCE18M0V13C99-R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=CSTCE18M0V13C99-R0

Packaging Information

| Packaging | Specifications | Standard Packing Quantity |
|-----------|---------------------|---------------------------------|
| R0 | 180mm Embossed Tape | 3000 |



MURATA's frequency adjustment and packaging technology expertise has enabled the development of the chip CERALOCK. This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features

1. High accuracy resonators whose total tolerance is available for less than +-3,000ppm.

- 2. High reliability and available for a wide temperature range.
- 3. Oscillation circuits do not require external load capacitors.
- 4. Available for a wide frequency range.
- 5. Extremely small and have a low profile.
- 6. No adjustment is necessary for oscillation circuits.

1 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





CSTCE18M0V13C99-R0

Note: This datasheet may be out of date. Please download the latest datasheet of CSTCE18M0V13C99-R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=CSTCE18M0V13C99-R0

Specifications

| Product Type | Ceramic Resonator (CERALOCK) |
|--|---------------------------------|
| Series | CSTCE_V_C |
| Frequency | 18.000MHz |
| Frequency Tolerance | +/-0.10% max. |
| Operating Temperature Range | -40°C~125°C |
| Frequency Shift by Temperature | +/-0.13% max. |
| Frequency Aging | +/-0.07% max. |
| Resonant Impedance (R1) | 40ohm max. |
| Built-in Load Capacitance (CL1/CL2) | 15pF |
| Shape | SMD |
| Wash | available |
| L x W (size) | 3.2x1.3mm |
| Mass | 17mg |

2 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

