

3.0 WATT

MINIATURE SIP DC/DC CONVERTER

HPR2XXC



FEATURES

- ROHS COMPLIANT
- FOUR CHANNELS OF ISOLATED POWER
- HIGH OUTPUT POWER DENSITY: > 9.4 WATTS/INCH³
- EXTENDED TEMPERATURE RANGE: -25°C TO +85°C
- HIGH EFFICIENCY: TO 84%
- LOW COST
- HIGH ISOLATION VOLTAGE: 750V CONTINUOUS INPUT-TO-OUTPUT AND CHANNEL-TO-CHANNEL
- SINGLE IN-LINE PACKAGE (SIP)
- INTERNAL INPUT AND OUTPUT FILTERING
- NON-CONDUCTIVE CASE


The HPR2XXC Series is designed for multiple channel applications that require small size and could benefit from a complete one-package solution. The HPR2XXC Series offers four isolated channels of output power in a footprint less than the size of many singular devices. This unregulated series of DC/DC converters provides three watts of total output power. Each isolated channel can supply up to 750mW.

The HPR2XXC Series uses advanced circuit design and packaging technology to realize superior reliability and performance. With only one switching converter on the board, the HPR2XXC eliminates the possibility of separate converters creating beat frequencies, or "aliasing" in multiple channel applications.

The high efficiency of the HPR2XXC Series means less internal power dissipation than comparable solutions. With reduced heat to dissipate, the HPR2XXC Series can operate at higher temperatures with no degradation in reliability. In addition, the high efficiency of the HPR2XXC Series provides greater than 9 watts/inch³ output power density.

The HPR2XXC Series offers the user low cost without sacrificing reliability. The use of surface mounted devices and manufacturing technologies make it possible to offer premium performance and low cost.

MECHANICAL

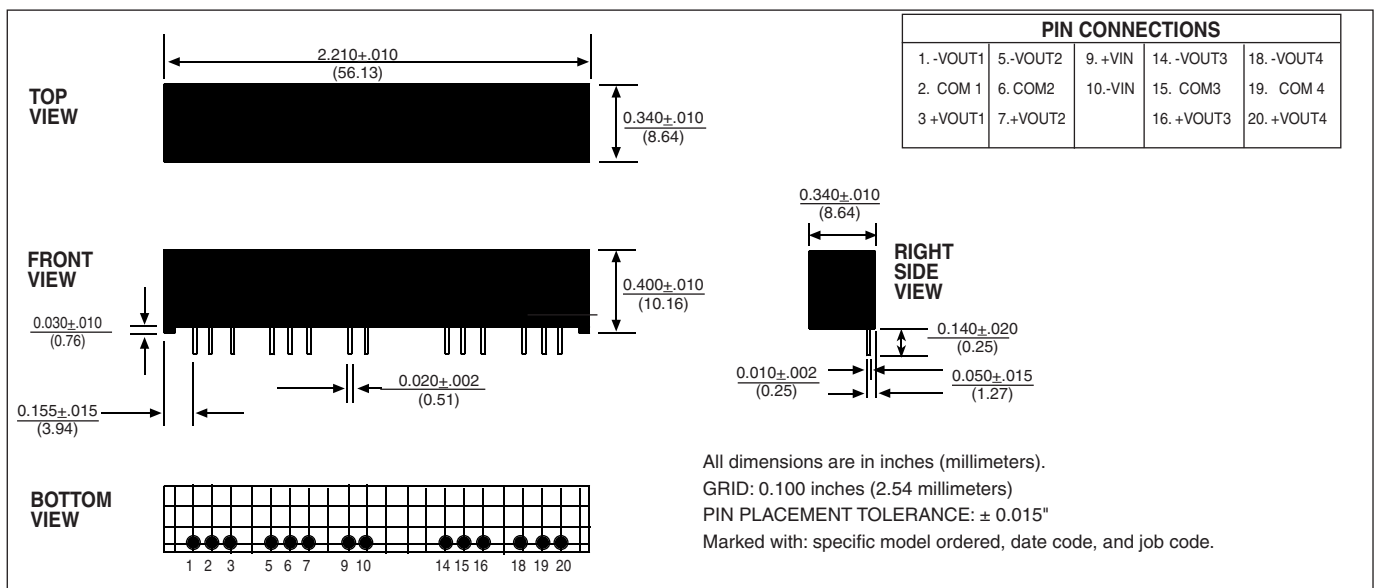

ELECTRICAL SPECIFICATIONS

Specifications typical at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current unless otherwise specified.

NOMINAL INPUT MODEL	RATED OUTPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mAp-p)	EFFICIENCY (%)
				NO LOAD (mA)	RATED LOAD (mA)		
HPR203C	5	± 5.2	± 73	70	820	35	74
HPR204C	5	± 12	± 30	75	750	35	80
HPR205C	5	± 15	± 25	75	750	35	80
HPR210C	12	± 12	± 30	30	305	15	82
HPR211C	12	± 15	± 25	30	300	15	84
HPR216C	15	± 12	± 30	20	240	15	83
HPR217C	15	± 15	± 25	20	240	20	84
HPR221C	24	± 5.0	± 75	20	170	20	74
HPR223C	24	± 15	± 25	20	155	20	81

Note: Other input to output voltage options may be available. Please consult factory.

COMMON SPECIFICATIONS

Specifications typical at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT Voltage Range		4.5 10.8 13.5 21.6	5 12 15 24	5.5 13.2 16.5 26.4	VDC VDC VDC VDC
Voltage Rise Time In Rush Current	At Startup			1	V/ μsec Amps
ISOLATION Rated Voltage Test Voltage Resistance Capacitance Leakage Current	Input to Output, Channel to Channel 60 Hz, 10 seconds $V_{\text{ISO}} = 240\text{VAC}, 60\text{Hz}$	750 750	10 30 4		VDC Vpk G Ω pF μArms
OUTPUT Total Rated Power Rated Power Each Channel Voltage Setpoint Accuracy Ripple & Noise Voltage Temperature Coefficient	Rated Load, Nominal V_{IN} BW = DC to 10MHz BW = 10Hz to 2MHz $I_L = 1\text{mA}, V_{\text{OUT}} = 5\text{V}$ $I_L = 1\text{mA}, V_{\text{OUT}} = 12\text{V}$ $I_L = 1\text{mA}, V_{\text{OUT}} = 15\text{V}$		3 750 40 7 .05	± 5 8 17 20	W mW % mVp-p mVrms VDC VDC VDC %/Deg C
REGULATION Line Regulation Load Regulation (5V out only) Load Regulation (All other Models)	High Line to Low Line Rated Load to 1mA Load Rated Load to 1mA Load		1 10 3		%/ $\%V_{\text{IN}}$ % %
GENERAL Switching Frequency Package Weight Frequency Change MTTF per MIL-HDBK-217, Rev. E Ground Benign Fixed Ground Naval Sheltered Airborne Uninhabited Fighter	Rated Load to 1mA Load High Line to Low Line Circuit Stress Method $T_A = +25^\circ\text{C}$ $T_A = +35^\circ\text{C}$ $T_A = +35^\circ\text{C}$ $T_A = +35^\circ\text{C}$		300 7 5 20 1.8 450 270 45		kHz g % % Mhr kHr kHr kHr
TEMPERATURE Specification Operation Storage		-25 -40 -40	+25	+85 +100 +110	$^\circ\text{C}$ $^\circ\text{C}$ $^\circ\text{C}$

ABSOLUTE MAXIMUM RATINGS


Internal Power Dissipation.....	1.2W
Short Circuit Protection.....	< 1 second
Lead Temperature (soldering, 10 seconds max).....	+300 $^\circ\text{C}$

ORDERING INFORMATION

Device Family	HPR 2XX C
HPR Indicates DC/DC Converter	
Model Number	
Selected From Table Above	
RoHS Compliance	

TYPICAL PERFORMANCE CURVES

Specifications typical at $T_A = +25^\circ\text{C}$, nominal input voltage, rated output current unless otherwise specified.

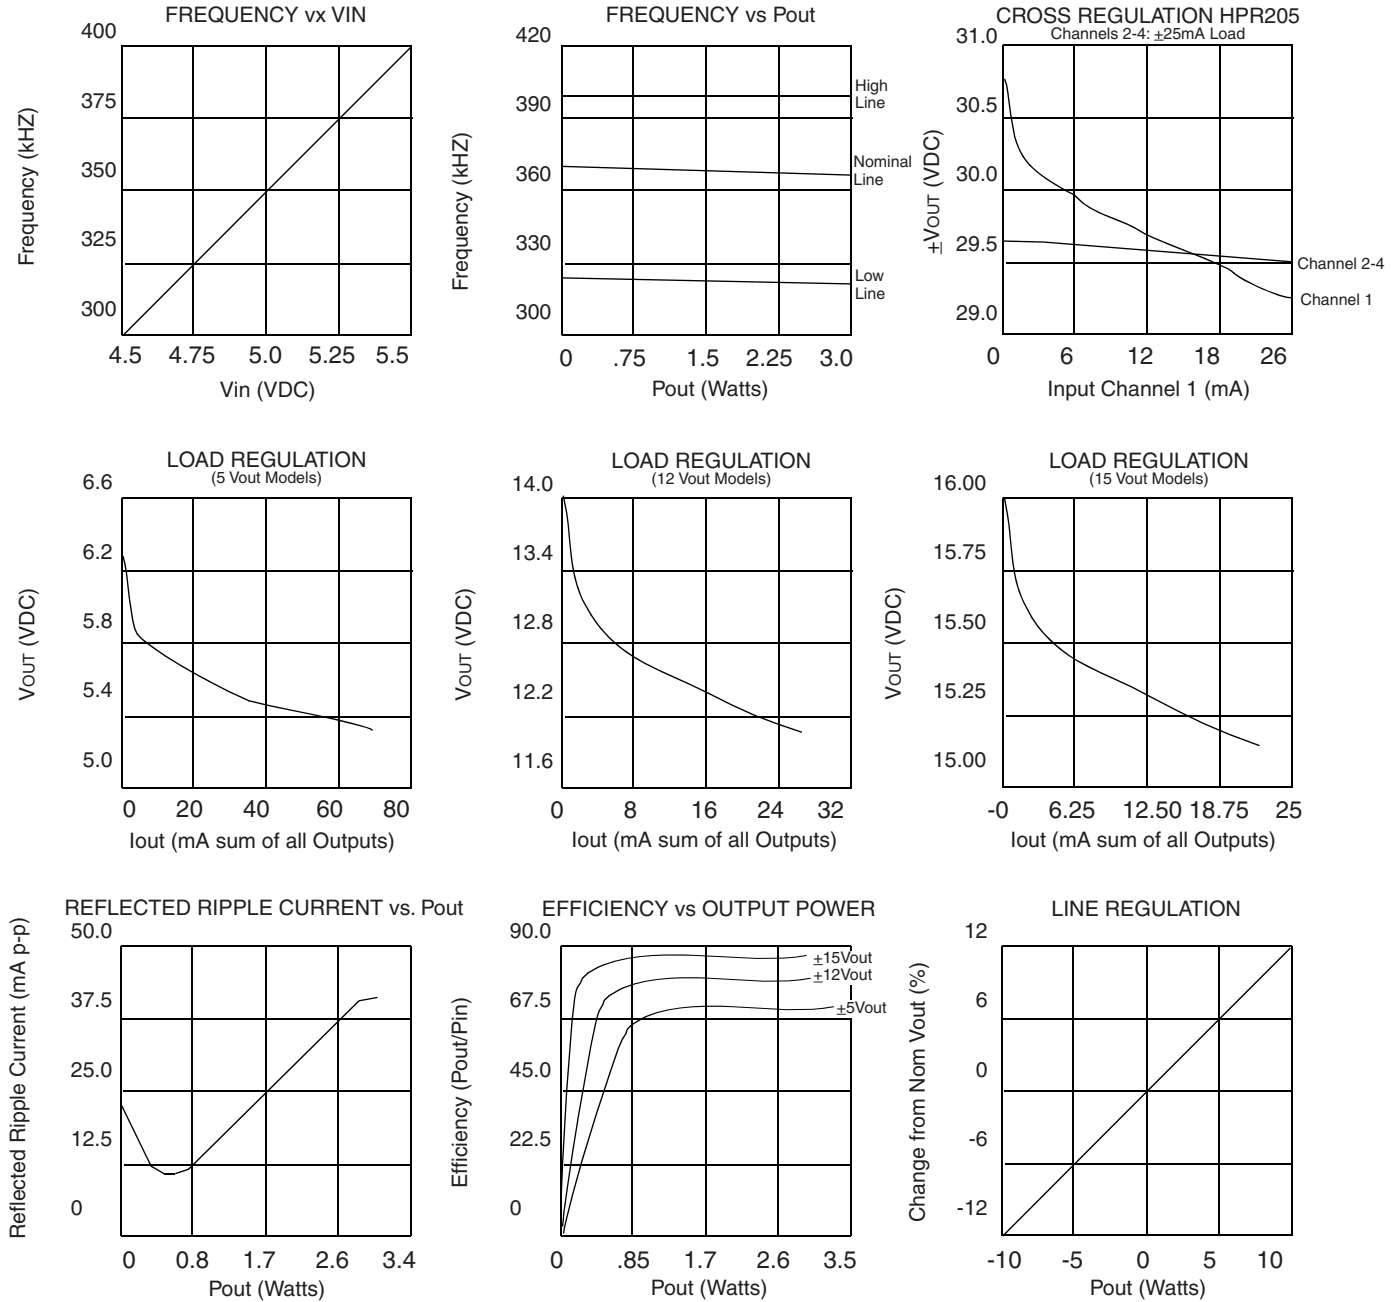

Murata Power Solutions, Inc.

11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.

Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356

www.murata-ps.com email: sales@murata-ps.com ISO 9001 & ISO 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2008 Murata Power Solutions, Inc.

- USA:** Mansfield (MA), Tel: (508) 339 3000, email: sales@murata-ps.com
- Canada:** Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
- UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
- France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
- Germany:** München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com
- Japan:** Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com
Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
- China:** Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com
Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com
- Singapore:** Parkway Centre, Tel: +65 6348 9096, email: singapore@murata-ps.com