

OBSOLETE PRODUCT

Product Data Sheet

Contact Factory for Replacement Model

.5 - 1.0 WATT DUAL-IN-LINE

REGULATED DC/DC CONVERTER

PWR59XXC



DESCRIPTION

The PWR59XXC Series offers an extensive selection of input and output voltage combinations to choose from, including a 9V output for Cheapernet local area networking. Both single and dual output voltages are available. These miniature, regulated DC/DC converters come in a 24-pin dual-in-line package for applications where space is a concern. The small size is possible through the use of surface mounted devices and manufacturing technologies. SMT processes and components also make it possible to offer the Series with no power derating over an extended temperature range of -25°C to +85°C.

A push-pull input stage ensures fixed frequency, non-saturating operation of the oscillator section of the PWR59XXC Series. MOSPOWER transistors are used as high speed switching elements. These rugged devices provide higher frequency to 500kHz operation, and uncomplicated drive circuitry. Reduced component count means higher reliability. High frequency operation means smaller magnetics. Higher isolation voltages are possible, due to the section wound transformer. Higher frequency operation also means less noise generation within the system's bandwidth. Linear regulators, used in the output stage, output voltage variations due to line and load changes, also provide short-circuit current limiting and thermal overload protection.

FEATURES

- High Reliability
- 24-Pin DIP Package
- Internal Input and Output Filtering
- Short-Circuit Current Limiting
- Thermal Overload Protection
- Built-In Standoffs
- Industry Standard Pinout




For full details go to www.murata-ps.com/rohs

These devices are intended for wave soldering or manual soldering.

They are not intended to be subject to surface mount processes under any circumstances.

The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of 260°C for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed 175°C. Care should be taken to control manual soldering limits identical to that of wave soldering.

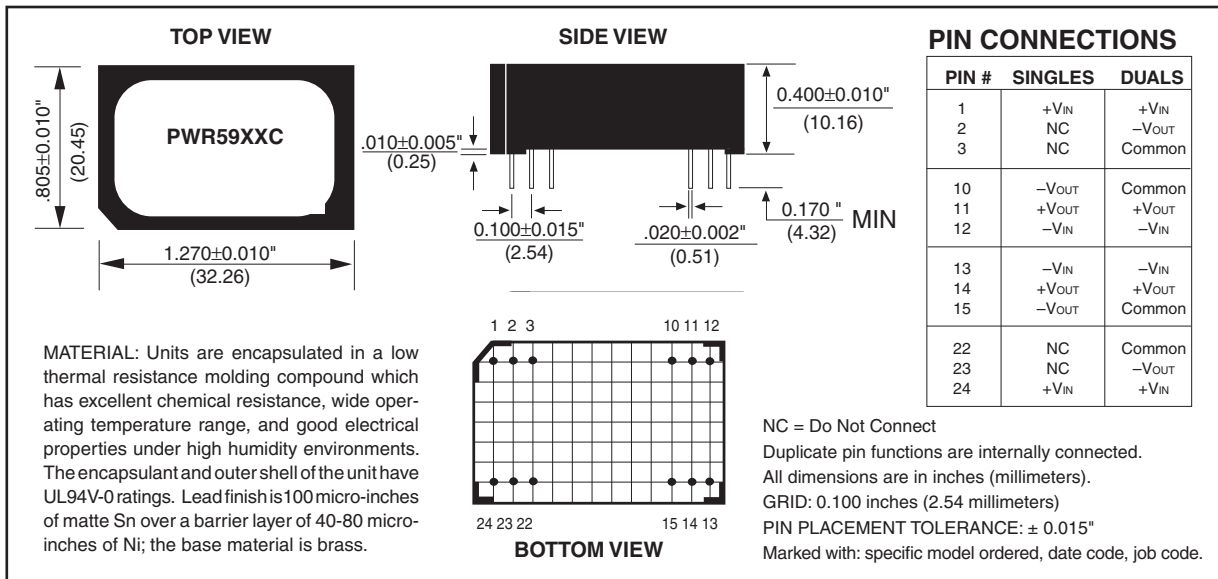

ELECTRICAL SPECIFICATIONS ① ②

Specifications typical at $T_A = +25^{\circ}\text{C}$, nominal input voltage, and rated output current unless otherwise specified.

MODEL	NOMINAL INPUT VOLTAGE (Vdc)	RATED OUTPUT VOLTAGE (Vdc)	RATED OUTPUT CURRENT (mA)	INPUT CURRENT		REFLECTED RIPPLE CURRENT (mAp-p)	EFFICIENCY (%)	RATED OUTPUT POWER (mW)
				NO LOAD (mA)	RATED LOAD (mA)			
PWR5900C	5	5	100	40	175	10	57	500
PWR5901	5	9	111	40	345	10	57	1000
PWR5902	5	12	83	40	345	10	57	1000
PWR5903	5	15	67	40	345	10	57	1000
PWR5904C	5	±5	±50	40	175	10	57	500
PWR5905	5	±12	±42	40	345	10	57	1000
PWR5906	5	±15	±33	40	345	10	57	1000
PWR5907	12	5	100	35	100	30	42	500
PWR5908	12	9	111	35	170	30	49	1000
PWR5909	12	12	83	35	150	30	55	1000
PWR5910	12	15	67	35	150	30	55	1000
PWR5911	12	±5	±50	35	76	30	55	500
PWR5912	12	±12	±42	35	150	30	55	1000
PWR5913	12	±15	±33	35	150	30	55	1000
PWR5914	15	5	100	30	76	20	44	500
PWR5915	15	9	111	30	135	20	50	1000
PWR5916	15	12	83	30	120	20	55	1000
PWR5917	15	15	67	30	120	20	55	1000
PWR5918	15	±5	±50	30	60	20	55	500
PWR5919	15	±12	±42	30	120	20	55	1000
PWR5920	15	±15	±33	30	120	20	55	1000
PWR5921	24	5	100	15	43	10	48	500
PWR5922	24	9	111	15	83	10	50	1000
PWR5923	24	12	83	15	73	10	55	1000
PWR5924	24	15	67	15	73	10	55	1000
PWR5925	24	±5	±50	15	40	10	55	500
PWR5926	24	±12	±42	15	73	10	60	1000
PWR5927	24	±15	±33	15	73	10	60	1000

Notes: ① Other input to output voltages may be available. Please consult factory.
 ② Strikethrough font denotes discontinued models.

ABSOLUTE MAXIMUM RATINGS

Output Short-Circuit Duration	Continuous
Internal Power Dissipation	1.5W
Lead Soldering Temperature (10seconds, max).....	+300°C

COMMON SPECIFICATIONS

Specifications typical at $T_A = +25^{\circ}\text{C}$, nominal input voltage, and rated output current unless otherwise specified.

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT					
Input Voltage Range		4.75	5	5.25	V _{DC}
		11.4	12	12.6	V _{DC}
		14.25	15	15.75	V _{DC}
		22.8	24	25.2	V _{DC}
ISOLATION					
Rated Voltage		750			V _{DC}
Test Voltage	60 Hz, 10 Seconds	750			V _{pk}
Resistance			10		GW
Capacitance			50		pF
Leakage Current	$V_{ISO} = 240V_{AC}, 60\text{Hz}$		4		μArms
OUTPUT					
Voltage Setpoint Accuracy	Rated Load, Nominal V_{IN}			±5	%
Temperature Coefficient			±0.02		%/°C
Ripple & Noise	No External Components		50		mVp-p
(BW = DC to 20MHz)	10μF Across Each Output		5		mVrms
	10μF Across Each Output		10	20	mVp-p
Line Regulation			±0.3		%
Load Regulation	No Load to Rated Load		±0.4		%
GENERAL					
Switching Frequency	All Models Except 24V _{IN} 24V _{IN} Models		500		kHz
			200		kHz
MTTF per MIL-HDBK-217, Rev. E*			900		kHr
Package Weight			11		g
TEMPERATURE					
Specification		-25	+25	+85	°C
Operation		-40		+100	°C
Storage		-40		+110	°C

ORDERING INFORMATION

Device Family	PWR 59XX C
PWR Indicates DC/DC Converter	
Model Number	
Selected from Table of Electrical Characteristics	
RoHS Compliant	

www.murata-ps.com email: sales@murata-ps.com ISO 9001 REGISTERED

- USA:** Tucson (AZ), Tel: (800) 547 2537, email: sales@murata-ps.com
- Canada:** Toronto, Tel: (866) 740 1232, email: toronto@murata-ps.com
- UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
- France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
- Germany:** München, Tel: +49 (0)89-544334-0, email: ped.munich@murata-ps.com
- Japan:** Tokyo, Tel: 3-3779-1031, email: sales_tokyo@murata-ps.com
Osaka, Tel: 6-6354-2025, email: sales_osaka@murata-ps.com
Website: www.murata-ps.jp
- China:** Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com
Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com

Murata Power Solutions, Inc.
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.
 Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356