


XRCHA24M000F0A13R0



Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Automotive powertrain/safety equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	

Appearance & Shape

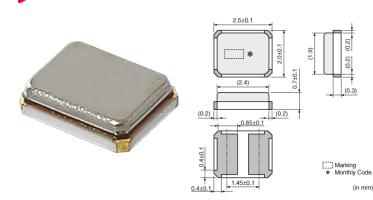

Note: This datasheet may be out of date. Please download the latest datasheet of XRCHA24M000F0A13R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=XRCHA24M000F0A13R0

Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Plastic Tape	3000



The crystal unit for automotive electronics that realized small package and highly accurate frequency.

Based on Murata's excellent package technology and high grade quartz crystal elements, achieving small size and high ccuracy unit.

Features

1. The series has high reliability and is available for a wide temperature range.

2.The crystal unit is small size (2.5 \times 2.0 \times 0.8 (mm)) , and contribute to reduction in mounting area.

3. The series complies to RoHS and ELV directives , being lead-free (phase 3).

4.The series complies to AEC-Q200.

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





XRCHA24M000F0A13R0

Note: This datasheet may be out of date. Please download the latest datasheet of XRCHA24M000F0A13R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=XRCHA24M000F0A13R0

Specifications

Product Type	Crystal Unit
Series	XRCHA
Туре	HCR2520
Frequency	24.0000MHz
Frequency Tolerance	+/-100ppm max. (25+/-3°C)
Operating Temperature Range	-40°C~150°C
Frequency Shift by Temperature	+/-100ppm max.
Frequency Aging	+/-5ppm max./year
Equivalent Series Resistance (ESR)	80ohm max.
Drive Level (DL)	300µW (600µW max.)
Load Capacitance (Cs)	8pF
Shape	SMD
Wash	Not available
L x W (size)	2.5x2.0mm
Mass	11.3mg

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet


Note: This datasheet may be out of date. Please download the latest datasheet of XRCHA24M000F0A13R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=XRCHA24M000F0A13R0

XRCHA24M000F0A13R0



INNOVATOR IN ELECTRONICS



Temperature Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

