

Product Search Data Sheet

CDBLB455KCLY09-B0


Discontinued RoHS

HS REACH

Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Consumer equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	

Appearance & Shape

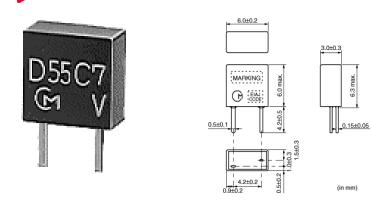

Note: This datasheet may be out of date. Please download the latest datasheet of CDBLB455KCLY09-B0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=CDBLB455KCLY09-B0

Packaging Information

Packaging Specifications		Standard Packing Quantity	
В0	Bulk	500	



Ceramic discriminator consists of a wide bandpiezoelectric resonator. It is ideal for mobile communications equipment due to its small size and light weight. Standard line includes products for a wide range of applications, from cordless telecom to cellular telephone. Practically adjustment free at the detection circuit, small size is suitable for downsizing.

Features

- 1. Small in size and light weight
- 2. Adjustment free at detection circuit
- 3. High sensitivity and stability
- 4. Wide range of standard products are available for various ICs.
- 5. Operating temperature range: -20 to +80 (°C), Storage

temperature range: -40 to +85 (°C)

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





CDBLB455KCLY09-B0

Note: This datasheet may be out of date. Please download the latest datasheet of CDBLB455KCLY09-B0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=CDBLB455KCLY09-B0



Specifications

Operating Temperature Range	-20°C to 80°C
Shape	Lead
Center Frequency	455.0kHz
Nominal Center Value	Yes
Recovered Audio 3dB BW	fn±15.0kHzmin.
Distortion(max.)	1.5%
Area of Distortion	1.5%max.(at fn)
Distortion(max.)(2)	3.5%
Area of Distortion(2)	[within fn ±8kHz]
Recovered Audio Output	70mV±20
IC	NE604N
IC Maker	PHILIPS
Mass	204mg

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.









CDBLB455KCLY09-B0

Note: This datasheet may be out of date. Please download the latest datasheet of CDBLB455KCLY09-B0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=CDBLB455KCLY09-B0







Part Number (X)	С	R	L
CDBKB455KCAY09-R0	120pF	1.8kΩ	-
CDBLB455KCLY09-B0	120pF	560Ω	220µH

Measurement Circuit

Frequency Characteristics

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

