

Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN22NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN22NJ00%23

"#"at the end indicates the package specification code.

0805(inch)/2015(mm) size, horizontal wound inductor.













### < List of part numbers with package codes >

LQW2BAN22NJ00B

LQW2BAN22NJ00K

LQW2BAN22NJ00L




### **Applications**

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Consumer equipment,Medical	
	equipment [GHTF A/B/C] except for	
	implant & surgery & auto injector,	
	Industrial equipment except for	
	transportation & facility & energy	
	equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	
Recommended	Consumer equipment	
Applications		



## Appearance & Shape

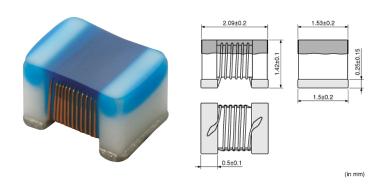



## **Notices**

Please consider 'Notice (Rating).' When rated current is applied to the products, self-temperature rise shall be limited to 40°C max.

1 of 5

### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN22NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN22NJ00%23

"#"at the end indicates the package specification code.



### References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	500
К	330Embossed Tape	8000
L	180Embossed Tape	2000

Mass (typ.)		
1 piece	0.014g	

2 of 5

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN22NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN22NJ00%23

"#"at the end indicates the package specification code.



## **Specifications**

L size	2.09±0.2mm
W size	1.53±0.2mm
T size	1.42±0.1mm
Size code inch (mm)	0805 (2015)
Inductance	22nH±5%
Inductance Test Frequency	250MHz
Rated current (Itemp) (Based on Temperature rise)	1900mA
Max. of DC resistance	0.07Ω
Operating Temperature Range (Self-temperature rise is included)	-55°C to 125°C
Class of magnetic shield	Non-Shielded
Q(min.)	85
Q Test Frequency	500MHz
Self resonance frequency (min.)	1850MHz
Brand	Murata
Series	LQW2BAN_00

3 of 5

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN22NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN22NJ00%23

"#"at the end indicates the package specification code.




## Notice For General

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.

### Derating of Rated Current



4 of 5

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$ 





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN22NJ00# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN22NJ00%23


"#"at the end indicates the package specification code.




### Characteristic Data

The charts below may show another part number which shares its characteristics.







5 of 5

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

