

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAN56NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN56NJ00%23

LQW2BAN56NJ00#

"#"at the end indicates the package specification code.

0805(inch)/2015(mm) size, horizontal wound inductor.




< List of part numbers with package codes > LQW2BAN56NJ00B LQW2BAN56NJ00K LQW2BAN56NJ00L



Applications

Please be sure to read and comply with	
these "Precautions for use."	
Consumer equipment,Medical	
equipment [GHTF A/B/C] except for	
implant & surgery & auto injector,	
Industrial equipment except for	
transportation & facility & energy	
equipment	
Please refer to Our Website and	
specifications, etc. for information about	
the performance, functions, quality,	
management, and safety required for	
the above applications, and use	
Products after confirming the	
performance and reliability of the actual	
Product.	
Concurrence	
Consumer equipment	

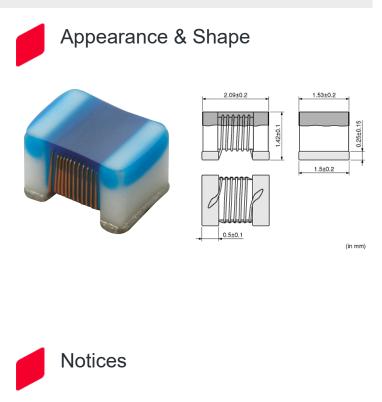

Please consider 'Notice (Rating).' When rated current is applied to the products, self-temperature rise shall be limited to 40°C max.

1 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQW2BAN56NJ00#

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAN56NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN56NJ00%23

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	500
к	330Embossed Tape	8000
L	180Embossed Tape	2000

Mass (typ.)		
1 piece	0.014g	

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 5



LQW2BAN56NJ00#

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAN56NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN56NJ00%23

"#"at the end indicates the package specification code.



Specifications

L size	2.09±0.2mm
W size	1.53±0.2mm
T size	1.42±0.1mm
Size code inch (mm)	0805 (2015)
Inductance	56nH±5%
Inductance Test Frequency	200MHz
Rated current (Itemp) (Based on Temperature rise)	1250mA
Max. of DC resistance	0.18Ω
Operating Temperature Range (Self-temperature rise is included)	-55℃ to 125℃
Class of magnetic shield	Non-Shielded
Q(min.)	70
Q Test Frequency	500MHz
Self resonance frequency (min.)	1600MHz
Brand	Murata
Series	LQW2BAN_00

3 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAN56NJ00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN56NJ00%23


"#"at the end indicates the package specification code.



LQW2BAN56NJ00#

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current



4 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet

Note: This datasheet may be out of date. Please download the latest datasheet of LQW2BAN56NJ00# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-gb/products/productdetail?partno=LQW2BAN56NJ00%23


"#"at the end indicates the package specification code.


Characteristic Data

LQW2BAN56NJ00#

The charts below may show another part number which shares its characteristics.

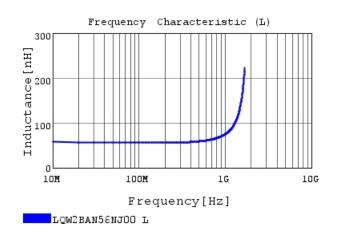

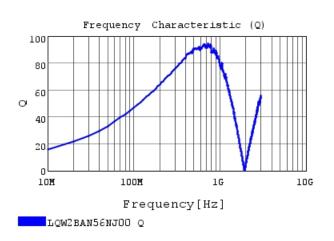

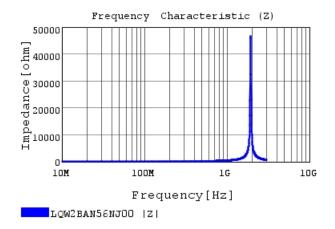

5 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

