

Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN56NG00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=LQW2BAN56NG00%23

"#"at the end indicates the package specification code.

0805(inch)/2015(mm) size, horizontal wound inductor.















< List of part numbers with package codes >

LQW2BAN56NG00B

LQW2BAN56NG00K

LQW2BAN56NG00L




Applications

| Unsuitable | Please be sure to read and comply with |
|--------------|---|
| Applications | these "Precautions for use." |
| | Consumer equipment,Medical |
| | equipment [GHTF A/B/C] except for |
| | implant & surgery & auto injector, |
| | Industrial equipment except for |
| | transportation & facility & energy |
| | equipment |
| Specific | Please refer to Our Website and |
| Applications | specifications, etc. for information about |
| | the performance, functions, quality, |
| | management, and safety required for |
| | the above applications, and use |
| | Products after confirming the |
| | performance and reliability of the actual |
| | Product. |
| Recommended | Company of a surface of the surface |
| Applications | Consumer equipment |



Appearance & Shape

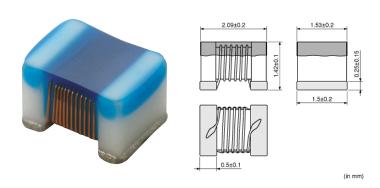



Notices

Please consider 'Notice (Rating).' When rated current is applied to the products, self-temperature rise shall be limited to 40°C max.

1 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN56NG00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=LQW2BAN56NG00%23

"#"at the end indicates the package specification code.



References

| Packaging | Specifications | Standard Packing Quantity |
|-----------|------------------|---------------------------------|
| В | Bulk(Bag) | 500 |
| K | 330Embossed Tape | 8000 |
| L | 180Embossed Tape | 2000 |

| Mass (typ.) | |
|-------------|--------|
| 1 piece | 0.014g |

2 of 5

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN56NG00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=LQW2BAN56NG00%23

"#"at the end indicates the package specification code.



Specifications

| L size | 2.09±0.2mm |
|---|----------------|
| W size | 1.53±0.2mm |
| T size | 1.42±0.1mm |
| Size code inch (mm) | 0805 (2015) |
| Inductance | 56nH±2% |
| Inductance Test Frequency | 200MHz |
| Rated current (Itemp) (Based on Temperature rise) | 1250mA |
| Max. of DC resistance | 0.18Ω |
| Operating Temperature Range (Self-temperature rise is included) | -55°C to 125°C |
| Class of magnetic shield | Non-Shielded |
| Q(min.) | 70 |
| Q Test Frequency | 500MHz |
| Self resonance frequency (min.) | 1600MHz |
| Brand | Murata |
| Series | LQW2BAN_00 |

3 of 5

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN56NG00# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=LQW2BAN56NG00%23

"#"at the end indicates the package specification code.




Notice For General

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current



4 of 5

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Note: This datasheet may be out of date.

Please download the latest datasheet of LQW2BAN56NG00# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-sg/products/productdetail?partno=LQW2BAN56NG00%23


"#"at the end indicates the package specification code.




Characteristic Data

The charts below may show another part number which shares its characteristics.

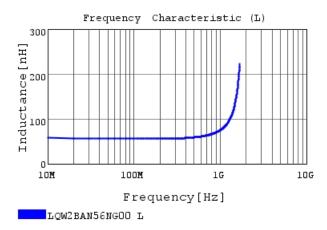

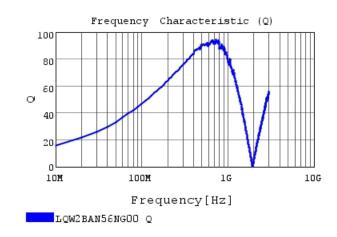

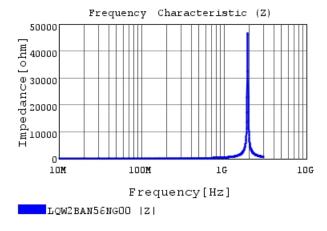

5 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

