

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN330MGR# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN330MGR%23

"#"at the end indicates the package specification code.

Size Code 3030 (1212) in mm (in inch), 1.0mm max. Thickness. Low DC Resistance Type















< List of part numbers with package codes > LQH3NPN330MGRK LQH3NPN330MGRL




### **Applications**

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
	Consumer equipment, Medical	
	equipment [GHTF A/B/C] except for	
	implant & surgery & auto injector,	
	Industrial equipment except for	
	transportation & facility & energy	
	equipment	
Specific	Please refer to Our Website and	
Applications	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	
Recommended	Canalimar aguinment	
Applications	Consumer equipment	



## Appearance & Shape







### **Notices**

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, temperature rise caused by self-generated heat shall be limited to 40°C max. When rated current is applied to the products, temperature rise caused by self-generated heat shall be limited to 20°C max.

1 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN330MGR# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN330MGR%2

"#"at the end indicates the package specification code.



### References

Packaging	Specifications	Standard Packing Quantity
К	330Embossed Tape	11000
L	180Embossed Tape	3000

Mass (typ.)		
1 piece	0.034g	

2 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN330MGR# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN330MGR%2

"#"at the end indicates the package specification code.



## **Specifications**

L size	3.0±0.1mm
W size	3.0±0.1mm
T size	0.9±0.1mm
Size code inch (mm)	1212 (3030)
Inductance	33µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	320mA
Rated current (Itemp)	600mA(Ambient temp.85°C)
(Based on Temperature rise)	360mA(Ambient temp.105°C)
Max. of DC resistance	1.032Ω
DC resistance	0.86Ω±20%
Operating Temperature Range (Self-temperature rise is included)	-40°C to 125°C
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 105°C
Class of magnetic shield	Shielded (Magnetic Resin)
Self resonance frequency (min.)	8MHz
Brand	Murata
Series	LQH3NPN_GR

3 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$ 

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.


Please download the latest datasheet of LQH3NPN330MGR# from the official website of Murata


http://www.murata.com/en-us/products/productdetail?partno=LQH3NPN330MGR%2

"#"at the end indicates the package specification code.




## Characteristic Data

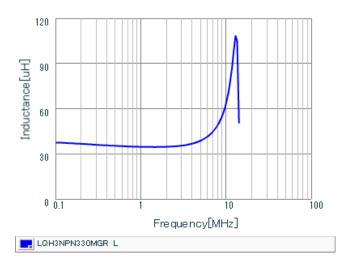

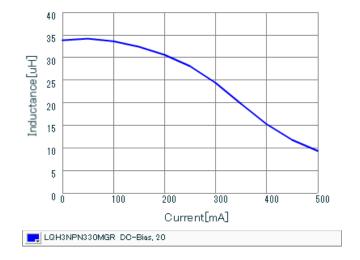

#### Inductance - Frequency Characteristics

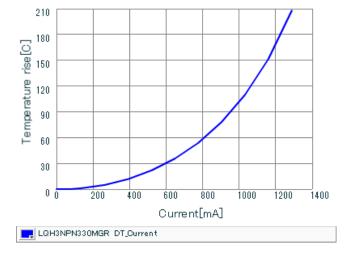

Impedance - Current Characteristics

Temperature Increase Characteristic

4 of 4

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

