

Product Search Data Sheet

PKB24SWH3301

Note: This datasheet may be out of date. Please download the latest datasheet of PKB24SWH3301 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=PKB24SWH3301

Discontinued RoHS

IS REACH

Applications

Unsuitable	Please be sure to read and comply with		
Applications	these "Precautions for use."		
	Consumer equipment, Industrial		
	Equipment		
	Please refer to Our Website and		
	specifications, etc. for information about		
Specific	the performance, functions, quality,		
Applications	management, and safety required for		
	the above applications, and use		
	Products after confirming the		
	performance and reliability of the actual		
	Product.		

Packaging Information


Packaging	Specifications	Standard Packing Quantity
-	Bulk	200



This is a unified piezoelectric sounder which has a piezoelectric diaphragm of 3 terminals connected to a self drive circuit, and it easily generates sound with only a DC power supply (DC3.0-20V). Using suitably designed resonant system, this type can be used where large sound volumes are needed.



Appearance & Shape

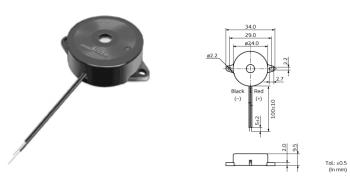

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





PKB24SWH3301

Note: This datasheet may be out of date. Please download the latest datasheet of PKB24SWH3301 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=PKB24SWH3301



Oscillation circuits Built-in Size φ24.0×9.5 mm Frequency 3.3kHz Sound Pressure Level 80dB (min.) Measure Condition of Sound [12Vdc,10cm] Pressure Level **Oscillating Frequency** 3.3kHz Oscillating Frequency ±0.5kHz Tolerance Measure Condition of [12Vdc] **Oscillation Frequency** Current Consumption(max.) 12mA Measure Condition of [12Vdc] **Current Consumption** Operating Voltage Range 3Vdc to 20Vdc **Operating Temperature** -20°C to 70°C Range Storage Temperature Range -30°C to 80°C Shape Lead Lead Shape Lead Wire type Lead length Lead wire length:100mm Drive Type Self Drive **EIAJ** Part Number PB-RWD-C24-33 Mass 2877mg

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Product Search Data Sheet




PKB24SWH3301

Note: This datasheet may be out of date. Please download the latest datasheet of PKB24SWH3301 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=PKB24SWH3301

Product Data



Voltage Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

