

TPSKA6M50B00-R3

Discontinued


RoHS

REACH

Applications

| | |
|-------------------------|--|
| Unsuitable Applications | Please be sure to read and comply with these "Precautions for use." |
| Specific Applications | Consumer equipment Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product. |

Appearance & Shape

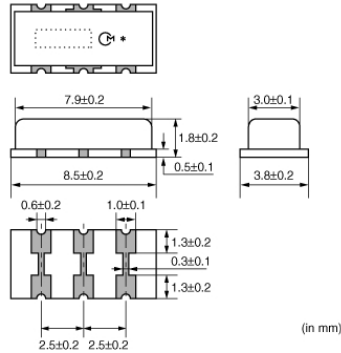

Packaging Information

| Packaging | Specifications | Standard Packing Quantity |
|-----------|---------------------|---------------------------|
| -R3 | 330mm Embossed Tape | 3000 |

Features

SMD ceramic trap TPSKA_B is a small and thin SMD trap sealed with a metal cap. Recommended for LCD-TVs, and small and thin tuners.

Features

1. High attenuation and high performance group delay time
2. Small and thin package
3. Reflow-solderable

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

TPSKA6M50B00-R3



Specifications

| | |
|-----------------------------|---------------|
| Center Frequency | 6.500MHz |
| Attenuation(min.) | 35dB |
| 30dB Stop Bandwidth | 70kHz (min.) |
| Ripple(max.) | 0.5dB |
| Area of Ripple | [0 to 6MHz] |
| Elements | 1 |
| Shape | SMD |
| Operating Temperature Range | -20°C to 80°C |
| Mass | 133.68mg |

Attention


1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

TPSKA6M50B00-R3


Product Data

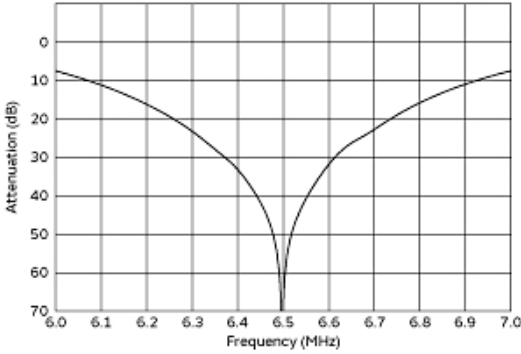

Frequency Characteristics

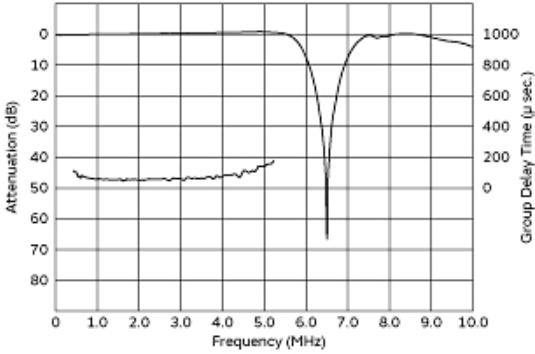

Spurious Response

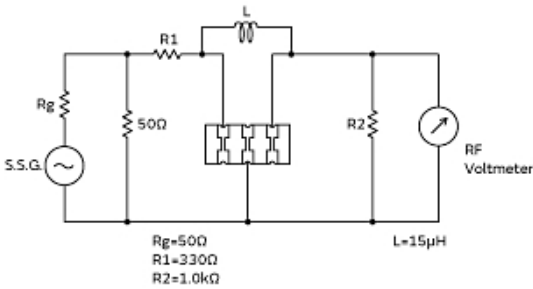

Measurement Circuit

Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.