

### Product Search Data Sheet

Note: This datasheet may be out of date.

Please download the latest datasheet of CSTCE19M6V53-R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=CSTCE19M6V53-R0

# CSTCE19M6V53-R0










### **Applications**

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Consumer equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	



### Appearance & Shape

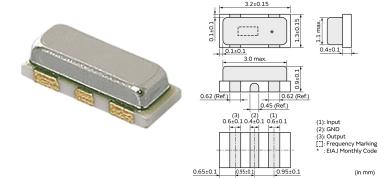



### Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000



### **Features**

MURATA's package technology expertise has enabled the development of the Chip CERALOCK.

High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

#### Features

- 1. Oscillation circuits do not require external load capacitors.
- 2. Available for a wide frequency range.
- 3. Extremely small and have a low profile.
- 4. No adjustment is necessary for oscillation circuits.

1 of 2

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





### Product Search Data Sheet

Note: This datasheet may be out of date. Please download the latest datasheet of CSTCE19M6V53-R0 from the official website of Murata  $\,$ Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=CSTCE19M6V53-R0

# CSTCE19M6V53-R0



# **Specifications**

Does does to Tours	Ceramic Resonator	
Product Type	(CERALOCK)	
Series	CSTCE_V	
-	40.0001411	
Frequency	19.660MHz	
Frequency Tolerance	+/-0.50% max.	
	17 0.00 70 max.	
Operating Temperature	-20°C~80°C	
Range	20 0 00 0	
Frequency Shift by	. / 0.200/	
Temperature	+/-0.30% max.	
Frequency Aging	+/-0.20% max.	
Frequency Aging	+7-0.20 % IIIax.	
Resonant Impedance (R1)	40ohm max.	
<u> </u>		
Built-in Load Capacitance	15pF	
(CL1/CL2)		
Shape	SMD	
Спаро	OME	
Wash	Not available	
LxW(size)	3.2x1.3mm	
,		
Mass	17mg	

2 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

