


Product Search Data Sheet

TZW4Z1R5A001B00

Discontinued RoHS REACH

Appearance & Shape



Note: This datasheet may be out of date. Please download the latest datasheet of TZW4Z1R5A001B00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=TZW4Z1R5A001B00

Features

1. To meet high power application due to withstanding voltage $550\,\mathrm{Vdc}.$

- 2. Extremely high self-resonant frequency. (More than 3GHz at rated C max.)
- 3. Typical application: Impedance matching for Cellular Base Station.
- 4. High Q value in more than VHF, UHF and Microwave bands. (More than 200 in 500MHz, C max.)
- 5. Available for pick and place machine. Possible thinner design due to 2.6mm low profile.
- 6. Non-electrical contact construction (rotor as middle electrode) provides high reliability.
- 7. Compact size: 4.2(W)x5.2(L)x2.6max.(H)mm.

Packaging Information

Packaging	Specifications	Standard Packing Quantity
B00	Bulk(Bag)	100

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





TZW4Z1R5A001B00

Note: This datasheet may be out of date. Please download the latest datasheet of TZW4Z1R5A001B00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=TZW4Z1R5A001B00

Specifications

Shape	SMD	
Operating Temperature Range	-55°C to 125°C	
Thickness	2.6mm	
Thickness Tolerance	max.	
Rated Voltage	250Vdc	
Cmin.(max.)	0.4pF	
Cmax.	1.5pF	
Cmax. Tolerance	+100/-0%	
Adjustment Direction	Тор	
тс	NP0±150ppm/°C	
Q	200min. at 500MHz, Cmax.	
Withstanding Voltage	550Vdc	
Insulation Resistance(min.)	10000ΜΩ	
Torque	1.5 to 10.0mNm	
Mass	0.15g	

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet




TZW4Z1R5A001B00

Product Data

Note: This datasheet may be out of date. Please download the latest datasheet of TZW4Z1R5A001B00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=TZW4Z1R5A001B00

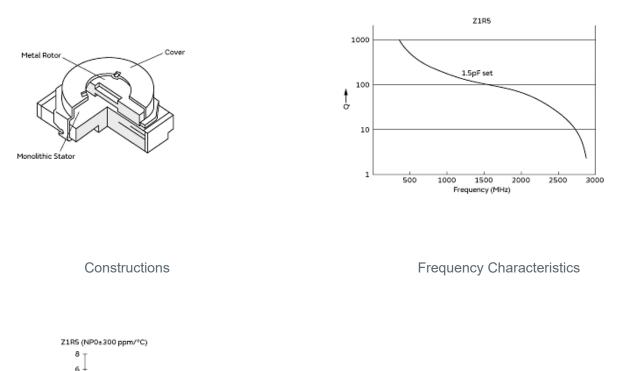

Temp. Coeff. Characteristics

4 -2 -20

-2 -4

-10 Cap. Change (%) -12 -12

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

125 Temp. (°C)

