

Datasheet of SAW Device


SAW Dual Filter

for GPS_GLONASS_GALILEO / 1in2out Unbalanced / HL /1511

Murata PN: SAWFD1G17AB0F0A

Feature

- Support GPS(L5)
- Support
 - BAIDOU(B1)+GPS(L1)+GLONASS(G1)
- Mirror Type of SAWFD1G17AA0F0A



Note : This Murata SAW Component is Consumer grade product and applicable for Cellular phone or similar end devices. Please also read Important Notice at the end of this document.






General Information

- Operating temperature	: -20 to +85 deg.C				
- Storage temperature	: -40 to +85 deg.C				
- Input Power	: +15.0 dBm 5000 h +50 deg.C				
- D.C. Volatage between the terminals	: 3V (25+/-2 deg.C)				
- Minimum Resistance between the terminals	: 10M ohm				
- RoHS compliance	: Yes				
- ESD (ElectroStatic Discharge) sensitive device					



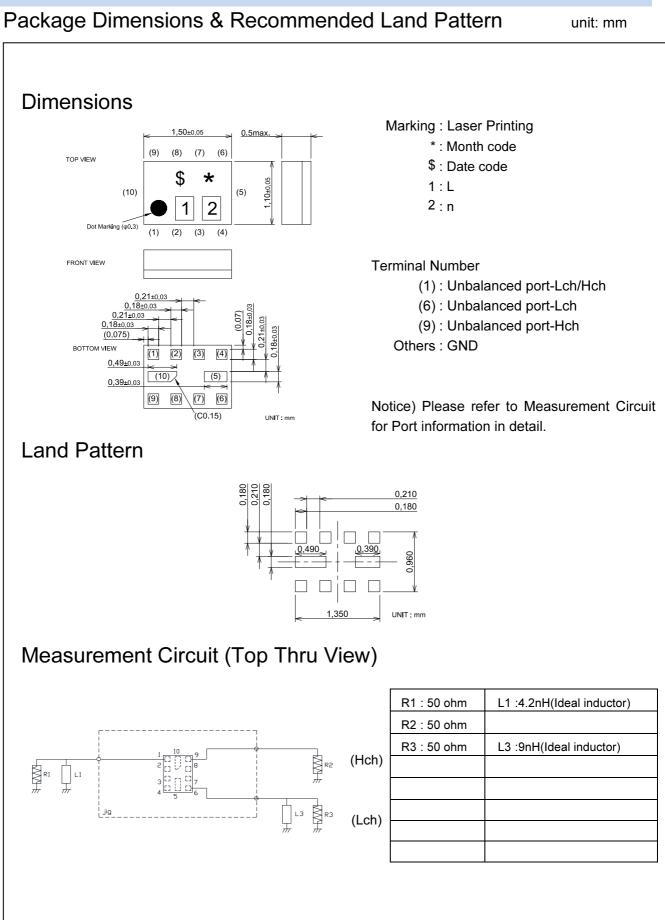



Electrical Characteristic < Low Freq. Filter >

	acten	ວແ						1	
Low Freq. Filter			Characteristics			Unit	Note		
			(-20 to +85 deg.C)						
			min.	typ.*	max.				
Conton Fromwonou	1					1176.5		MHz	
Center Frequency	1101		1100						
Insertion Loss	1164.	to	1189.	MHz		1.2	1.8	dB	GPS L5 Band
Ripple Deviation	1164.	to	1189.	MHz		0.3	1.0	dB	
GDT Ripple Deviation	1164.	to	1189.	MHz		3	10	ns	
VSWR	1164.	to	1189.	MHz		1.5	2.0		
Absolute Attenuation	638.	to	748.	MHz	35	47		dB	
	777.	to	787.	MHz	35	46		dB	
	887.	to	915.	MHz	32	43		dB	B8Tx
	1427.	to	1463.	MHz	28	38		dB	B11Tx, B21Tx
	1626.5	to	1660.5	MHz	26	33		dB	B24Tx
	1695.	to	1785.	MHz	32	40		dB	
	1850.	to	2025.	MHz	35	47		dB	
	2300.		2400.	MHz	33	47		dB	B40
		to	2483.		32	47		dB	
	2400.	to		MHz					ISM2.4G
	2500.	to	2690.	MHz	30	43		dB	B41
	3400.	to	3800.	MHz	25	37		dB	B42, B43
	4400.	to	4900.	MHz	23	35		dB	
	5150.	to	5925.	MHz	22	33		dB	ISM5G
1									
					ļ				
									ļ
	•								* Typical value at 25+2deg C

* Typical value at 25±2deg.C




Electrical Characteristic < High Freq. Filter >

Characteristics Unit Note Contracteristics Total state 1100 Contracteristics Contracteristics Contracteristics Contracteristics Contracteristics Contracteristics Contracteristics Stop Stop Contracteristin thet <th colspan="9"></th>									
Insertion Los Inserion Los Insertion Los Insertion				Characteristics			ļ		
Center Frequency 177.43 177.43 114 22 dB 1574.39 1576.45 MHz 1.4 1.9 dB +23 to +27 deg.C 1550.50 10 1563.15 MHz 1.5 2.2 dB +23 to +27 deg.C 1550.50 10 1563.15 MHz 1.6 2.2 dB +23 to +27 deg.C 1597.55 10 1050.59 MHz 1.6 2.2 dB +23 to +27 deg.C GDT Ripple Deviation 1597.55 1005.59 MHz 0.1 1.1 dB 1505.50 10563.56 MHz 0.1 1.1 dB +23 to +27 deg.C 1505.50 10563.51 MHz 0.1 1.1 dB +23 to +27 deg.C 1505.50 10505.58 MHz 0.1 1.1 dB +23 to +27 deg.C VSWR 1577.55 10 1563.56 MHz 1.8 2.0 Hz +1.7 2.0 1597.50 1050.58 MHz <t< td=""><td colspan="3">High Freq. Filter</td><td>(-201</td><td colspan="2">to +85 deg.C)</td><td>Unit</td><td>Note</td></t<>	High Freq. Filter			(-201	to +85 deg.C)		Unit	Note	
Center Frequency 1757 39 10 1757 45 MHz Insertion Loss 1577 39 10 1576 45 MHz 1.4 1.9 dB 1556 05 10 1563 15 MHz 1.4 1.5 2.3 dB 1556 05 10 1563 15 MHz 1.8 2.3 dB 1597 55 10 056 59 MHz 1.8 2.3 dB 1597 55 10 055 59 MHz 1.6 2.3 dB 1597 55 10 055 59 MHz 0.1 1.1 dB 1597 35 10 1563 35 MHz 0.1 1.1 dB 1597 55 10 1658 59 MHz 1.8 2.0 mL 1.1 dB VSWR 1575 50 1656 589 MHz 1.8 2.0 mL 1.8 2.0 mL Absolute Attenuation 777. 0 78 MHz 38 48 dB 1.1				min.	typ.*	max.			
Insertion Loss 1574.39 10 176.45 MH2 14 10 08 +2310 +277deg.C 1559.05 1550.15 MH2 1.5 2.2 08 +2310 +27deg.C 1597.55 1005.89 MH2 1.6 2.2 08 +2310 +27deg.C GDT Ripple Deviation 1597.55 1005.89 MH2 1.6 2.2 d8 +2310 +27deg.C GDT Ripple Deviation 1597.55 1005.89 MH2 0.1 0.7 d8 -	Center Frequency				1575		MHz		
1574.39 to 1576.45 MHz 1.5 2.3 dB +23 to +27 deg.C 1559.05 to 155.15 MHz 1.5 2.2 dB +23 to +27 deg.C 1577.55 to 1605.89 MHz 1.6 2.2 dB +23 to +27 deg.C GDT Ripple Dewation 1577.55 to 1605.89 MHz 0.1 1.6 2.2 dB +23 to +27 deg.C GDT Ripple Dewation 1577.55 to 1605.89 MHz 0.1 1.1 dB 1597.55 to 1605.89 MHz 0.1 1.1 dB VSWR 1577.55 to 1605.89 MHz 1.7 2.0 - 1597.55 to 156.315 MHz 1.7 2.0 - - 1597.55 to 160.53.9 MHz 1.6 2.0 - - 4150 015.51.5 MHz 3.8 4.3 dB B131x - -		1574 39 to 1576 45 M	IHz			20			
1559.05 0 1553.15 MH2 1.5 2.3 dB 1597.55 0 1053.89 MH2 1.6 2.3 dB 1597.55 10 1058.89 MH2 1.6 2.2 dB +2310+27/deg.C GDT Ripple Deviation 1597.55 10 1058.89 MH2 3 10 ns Ripple Deviation 1597.55 10 1058.89 MH2 0.1 0.1 1.4 dB VSWR 1574.39 10.774.45 MH2 0.1 1.1 dB		1574.39 to 1576.45 M	IHz					+23 to +27deg C	
1559.05 to 1559.05 MHz 1.6 2.2 dB +23 to +27 deg.C GDT Ripple Deviation 1597.55 to 1005.89 MHz 1.6 2.2 dB +23 to +27 deg.C GDT Ripple Deviation 1597.55 to 1005.89 MHz 0.1 1.7 2.0 N Ripple Deviation 1574.35 to 1005.89 MHz 0.1 1.1 dB		1559.05 to 1563.15 M						2010 21409.0	
1597.55 0 1605.89 MHz 1.6 2.3 dB GDT Ripple Deviation 1597.55 1006.89 MHz 3 10 ns Ripple Deviation 1597.55 10 105.89 MHz 0.1 0.7 dB Might Product 157.45 10 1.6 2.2 dB +23 to +27 deg.C VSWR 157.55 10 105.68 MHz 0.1 1.1 dB VSWR 157.55 10 105.68 MHz 1.7 2.0 - 1597.55 10 105.89 MHz 3.4 43 dB - 1597.55 10 105.89 MHz 3.4 48 43 - - 1597.55 10 105.925 MHz 34 39 dB - - - - - - - - - - - - - - - - - - <		1559.05 to 1563.15 M	IHz					+23 to +27deg C	
ISP:755 IO:05.89 MHz 3 10 ns Ripple Deviation 1574.39 IO:05.89 MHz 0.1 0.7 dB 1576.35 IO:05.89 MHz 0.1 1.1 dB 0 1597.55 IO:05.89 MHz 0.1 1.1 dB 0 0 1597.55 IO:05.89 MHz 1.3 2.1 0		1597.55 to 1605.89 M						-2010-27009.0	
GDT Ripple Deviation 1597.55 10 155 10 155 Ripple Deviation 1574.39 10 754 MHz 0.1 0.1 1.1 4B 15570.55 10 1563.15 MHz 0.1 1.1 4B VSWR 1574.39 10 1576.45 MHz 1.3 2.1 P 15590.55 1056.89 MHz 1.6 2.0 P P 1597.55 1056.89 MHz 1.6 2.0 P <t< td=""><td></td><td>1597.55 to 1605.89 M</td><td></td><td></td><td></td><td></td><td></td><td>+23 to +27deg C</td></t<>		1597.55 to 1605.89 M						+23 to +27deg C	
Ripple Deviation 1574.39 10; 76:45 MHz 0.1 0.7 dB VSWR 1597.55 10; 1058.95 MHz 0.1 1.1 dB 1597.55 10; 1058.95 MHz 1.3 2.1	GDT Ripple Deviation	1597.55 to 1605.89 M						12010127009.0	
1559.05 10 156 10 11 18 VSWR 1574.35 10 1576.45 MHz 1.3 2.1 Performance 1597.55 10 1055.16 MHz 1.6 2.0 Performance 1597.55 10 1055.16 MHz 1.6 2.0 Performance Absolute Attenuation 717 10 787 MHz 38 43 9 48 10 925 MHz 34 39 48 Performance Performance 10 10 925 MHz 34 39 48 Performance Performance <td< td=""><td></td><td>1574 39 to 1576 45 M</td><td></td><td></td><td>-</td><td></td><td></td><td></td></td<>		1574 39 to 1576 45 M			-				
1597.55 10 1005.89 MHz 0.1 1.1 dB VSWR 1574.39 10 1576.45 MHz 1.7 2.0		1559.05 to 1563.15 M	1112						
VSWR 1574.39 to 176.45 MHz 1.3 2.1 Absolute Attenuation 1597.55 to 1605.89 MHz 1.6 2.0 Absolute Attenuation 777 to 787 MHz 38 43 0d B B131x 77 to 787 MHz 38 43 0d B B B131x 10 to 925 MHz 34 39 dB dB 170 to 1797 MHz 34 39 dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB dB<		1597.55 to 1605.89 M	1112 1117						
1559.55 to 1603.15 MHz 1.7 2.0 Absolute Attenuation 777 to 787 MHz 38 43 dB B13Tx 814 to 915 MHz 34 39 dB							45		
1697.55 10 1005.89 MHz 16 2.0 Absolute Attenuation 777 0 787 MHz 38 43 d8 B131x 10 10 925 MHz 34 39 d8 B131x 925 10 925 MHz 34 39 d8 B 1427. to 1433 MHz 32 48 d8 DCS-Tx 170. to 1785 MHz 40 44 d8 DCS-Tx 180. to 1797. MHz 37 43 d8 PCS-Tx 1910. to 1980. MHz 37 43 d8 B331x 2305. to 2315. MHz 37 43 d8 B341x 2305. to 2357. MHz 37 43 d8 B30Tx 2401. to 248 MHz 70 170 d8 d8 <td>0.001</td> <td>1559.05 to 1563.15 M</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>	0.001	1559.05 to 1563.15 M							
Absolute Attenuation 777. 10 787. MHz 38 43 dB BI3Tx 10 to<		1597.55 to 1605.89 M							
814. 10. 1427. 10. 10. 1427. 1143. MHz 32. 46. dB 11.	Absolute Attenuation			38		2.0	dB		
10. 10 2925. MHz 34 39 dB 1427. 10 1483. MHz 32 46 dB 1710. 10 1785. MHz 40 44 dB DCS-Tx 1786. 10 1797. MHz 40 44 dB DCS-Tx 1786. 10 1910. MHz 38 44 dB DCS-Tx 1910. 1980. MHz 37 44 dB B30Tx 2305. 2010. 10 2255. MHz 37 44 dB B30Tx 2401. 2305. 10 2315. MHz 43 49 dB B30Tx 2401. 2401. 16 2433. MHz 23 34 6 B 7x 2500. 10 2570. MHz 23 33 dB 5G ISM 10000. 10000. MHz 6.0 16.0 dB 16.0 16.0 10000. 10 10.0 16.0 16.0 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
925. io 960. MHz 34 39 dB 1427. io 1463. MHz 42 46 dB DCS-Tx 1786. to 1797. MHz 40 45 dB PCS-Tx 1860. to 1910. MHz 37 43 dB PCS-Tx 1910. to 1980. MHz 37 43 dB B34Tx 2305. to 2215. MHz 43 49 dB B30 Tx 2401. to 2433. MHz 40 47 dB B24G ISM 2500. to 2570. MHz 33 dB 25G ISM 10000. to 12000. MHz 6.0 16.0 dB 11000. to 12000. MHz 6.0 16.0 dB 11000. to 12000. MHz 6.0 16.0 dB 11000. to 12000. MHz 6.0 16.0 16.0 11000. to							-	<u> </u>	
1427. 10 1463. MHz 32 46 dB DCS-Tx 1786. to 1797. MHz 40 44 dB DCS-Tx 1786. to 1797. MHz 38 44 dB DCS-Tx 1850. to 1910. MHz 38 44 dB DCS-Tx 1910. to 1980. MHz 37 44 dB B34Tx 2010. to 2225. MHz 37 44 dB B30Tx 2401. to 2483. MHz 40 47 dB B24GISM 2500. to 2470. MHz 33 dB 5GISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB 11000. to 12000. MHz 6.0 16.0 16.0 1000. to to to to 16.0 16.0 1000. <								<u> </u>	
1710. to 1786. MHz 40 45 dB DCS-Tx 1880. to 1910. MHz 34 dB B34Tx 2305. to 2245. MHz 37 43 dB B34Tx 2305. to 2215. MHz 37 44 dB B33Tx 2305. to 2315. MHz 40 47 dB B30 Tx 2401. to 2483. MHz 40 47 dB B30 Tx 2500. to 2570. MHz 33 dB BTx SGISM 10000. to 5885. MHz 23 33 dB SGISM 10000. to 12000. MHz 6.0 16.0 dB Incompatibility 10000. to 12000. MHz 6.0 16.0 dB Incompatibility Into to Incompatibility Incompatibility Incompatibility Incompatibility Incompatibility Into to Incompatibility <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
1786. to 1797. MHz 40 45 dB 1850. to 1910. MHz 38 44 dB PCS-Tx 1910. to 1980. MHz 37 43 dB B34Tx 2010. to 2025. MHz 37 44 dB B34Tx 2305. to 2315. MHz 43 49 dB B30 Tx 2401. to 2483. MHz 40 47 dB B24G ISM 2500. to 2570. MHz 33 dB 5G ISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB 10000. to 12000. MHz 6.0 16.0 dB 10000. to 12000. MHz 6.0 16.0 dB 10000. to 12000. MHz 6.0 16.0 16.0 10000. to to									
1850. to 1910. MHz 38 44 dB PCS-Tx 1910. to 1980. MHz 37 44 dB B34Tx 2010. to 2025. MHz 37 44 dB B30 Tx 2301. to 2025. to 2315. MHz 43 49 dB B30 Tx 2401. to 2483. MHz 40 47 dB 2.4 GISM 2500. to 2570. MHz 23 33 dB 5G ISM 10000. to 12000. MHz 6.0 16.0 dB								DC9-1X	
1910. to 1980. MHz 37 43 dB B34Tx 2010. to 2025. MHz 37 44 dB B34Tx 2305. to 2315. to 2315. to 2315. to 2315. to 2315. to 2315. to 2431. to 2433. MHz 40 47 dB B30 Tx 2401. to 2483. MHz 40 47 dB 2.4G ISM 2500. to 2570. MHz 33 dB 5G ISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB 10000. to 12000. MHz 10.0 dB da 10000. to 12000. MHz 40 da da 10000. to 1200. MHz 40 da da da 10000. to 1200. MHz 40 <							-	200 7	
2010. to 2025. MHz 37 44 dB B30 Tx 2005. to 2315. MHz 40 47 dB B30 Tx 2401. to 2433. MHz 40 47 dB B30 Tx 2500. to 2570. MHz 39 46 dB B7 Tx 5160. to 5885. MHz 23 33 dB 5G ISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB 11000. to to 10.0 10.0 10.0 11000. to to 10.0 10.0 10.0 11000. to to								PCS-Ix	
2305. 160 2315. MHz 43 49 dB B30 Tx 2401. 10 2483. MHz 40 47 dB 2.4G ISM 2500. 10 2570. MHz 33 dB BT x 5160. 10 5885. MHz 23 33 dB SG ISM 10000. to 11000. MHz 7.0 17.0 dB Image: constraint of the second of the se									
2401. to 2483. MHz 40 47 dB 2.4G ISM 2500. to 2570. MHz 39 46 dB BTx 5180. to 5888. MHz 23 33 dB 5G ISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB									
2500. to 2570. MHz 39 46 dB B7 Tx 5160. to 5885. MHz 23 33 dB 5G ISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB									
5160. to 5885. MHz 23 33 dB 5G ISM 10000. to 11000. MHz 7.0 17.0 dB 11000. to 12000. MHz 6.0 16.0 dB 11000. to 12000. MHz 6.0 16.0 dB 1000. to 12000. MHz 6.0 16.0 dB 1000. to 12000. MHz 6.0 16.0 dB 1000. to 12000. MHz 6.0 16.0 16.0 1000. to 12000. MHz 6.0 16.0 16.0 1000. to 10.0 16.0 16.0 10.0 10.0 1000. to 10.0 10.0 10.0 10.0 10.0 10.0 1000. to 10.0 10.0 10.0 10.0 10.0 10.0 1000. to 10.0 10.0 10.0 10.0 10.0 10.0 10.0 10.0 1000.0 <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									
10000. 1000. MHz 7.0 17.0 dB 11000. 10 MHz 6.0 16.0 dB 11000. 10 1000. MHz 1000. 1000. 1000. 11000. 10 1000. 1000. 1000. 1000. 1000. 11000. 1000. 1000. 1000. 1000. 1000. 1000. 11000. 1000. 1000. 1000. 1000. 1000. 1000. 11000. 1000. 1000. 1000. 1000. 1000. 1000. 11000. 1000. 1000. 1000. 1000. 1000. 1000. 1000. 11000. 1000. 1000. 1000. 1000. 1000. 1000. 1000. 1000. 1000. 110000. 10000.									
11000. 12000. MHz 6.0 16.0 dB								5G ISM	
				7.0			dB		
Image: state of the state of		11000. to 12000. N	IHz	6.0	16.0		dB		
Image: state of the state of									
Image: state of the state of									
Image: set of the									
Image: set of the									
Image: set of the									
Image: state of the state of									
Image: set of the									
Image: set of the									
Image: sector of the sector									
Image: sector of the sector									
Image: sector of the sector									
Image: sector of the sector									
Image: set of the								<u> </u>	
Image: state of the state of								<u> </u>	
								<u> </u>	
								<u> </u>	
Image: state of the state								<u> </u>	
Image: state of the state								<u> </u>	
Image: state of the state								<u> </u>	
Image: state of the state								<u> </u>	
Image: state of the state									
								<u> </u>	
						1			


* Typical value at 25±2deg.C



Electrical Characteristic

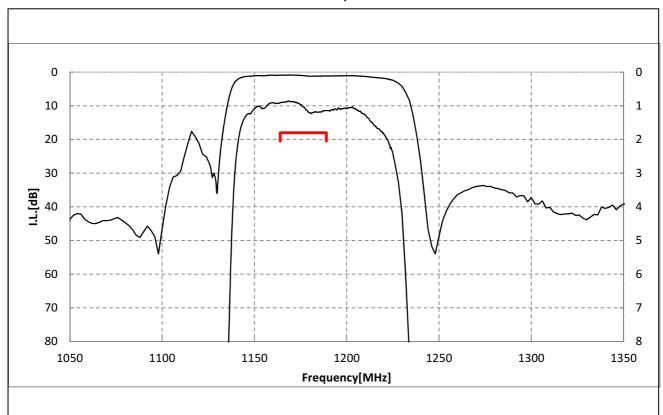


< Low Freq. Filter >

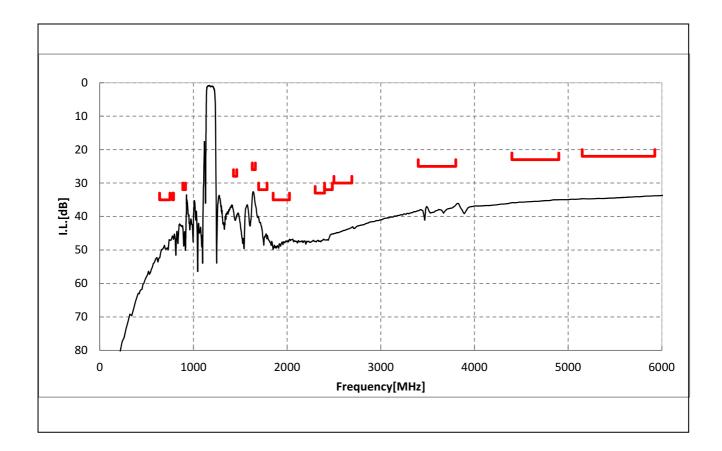




Electrical Characteristic

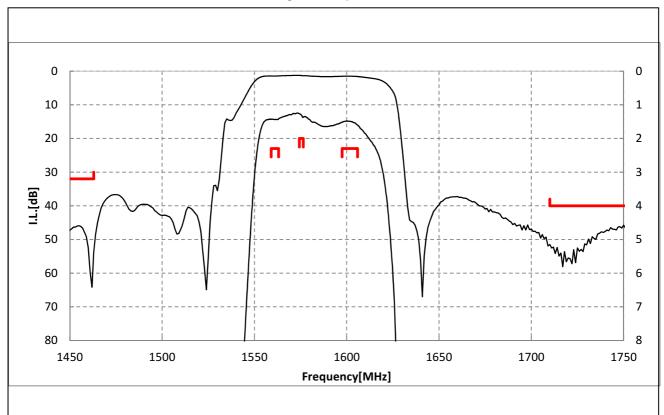


< High Freq. Filter >

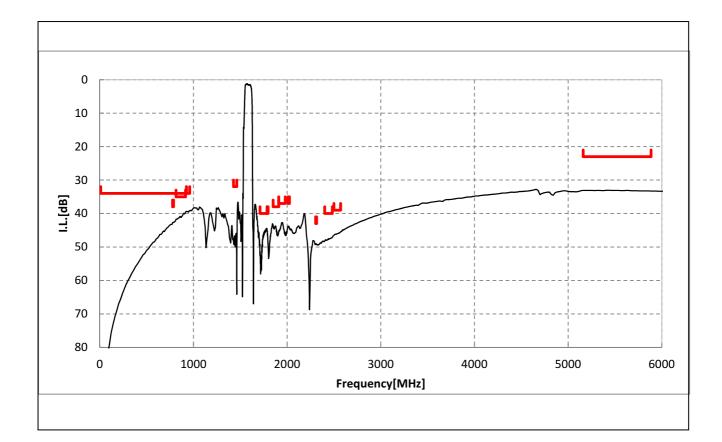




Dimensions of Tape & Reel unit: mm


Carrier Tape

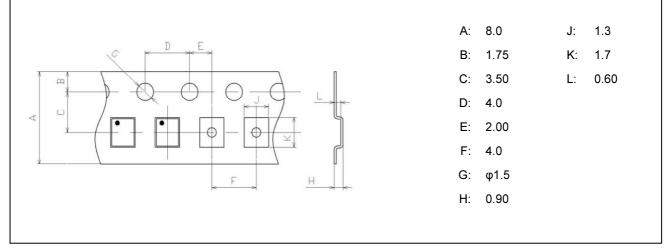

Tape

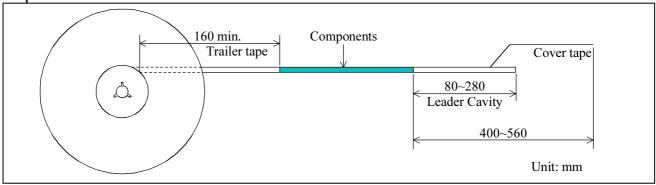

Reel

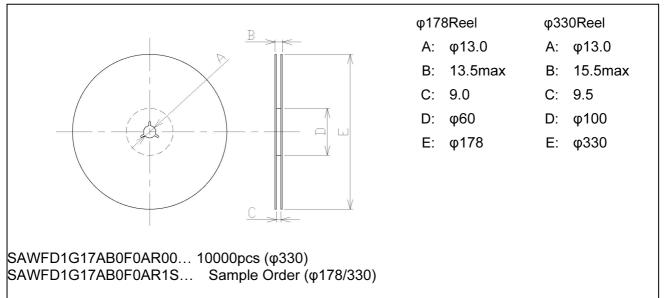



Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product specified in the front page of this product specifications (the "Product" or "Products") when our Product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our Product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our Product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the Product is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such Products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The Product shall not be used for any application which requires especially high reliability or accuracy in order to prevent defect which incurs high possibility of damage to the third party's life, body or property such as the applications listed below as item (a) to (j) (the "Prohibited Application"). You acknowledge and agree that, if you use our Products in the Prohibited Applications, we will not be responsible for any damage caused by such use.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN THE PROHIBITED APPLICATIONS.

- (a) Aircraft equipment.
- (b) Aerospace equipment
- (c) Undersea equipment.
- (d) Power plant control equipment -
- (e) Medical equipment.
- (f) Transportation equipment (vehicles, automotive, trains, ships, etc.).

(g)Traffic signal equipment.

(h)Disaster prevention / crime prevention equipment.

- (i) Burning / explosion control equipment
- (j) Application of similar complexity and/ or reliability requirements to the applications listed in the above.

For the avoidance of doubt, the Product is not automotive grade, and will not support such requests for automotive as below, also not support other specific requests for automotive.

- AEC-Q200
- PPAP
- IATF16949,VDA6.3
- Zero Defect program
- Long product life cycle
- Automotive 8D failure analysis and report



Important Notice (2/2)

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the Product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device. When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our Products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our Products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use. Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The Product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

•the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the Product to be sold by you,

·deviation or lapse in function of engineering sample,

• improper use of engineering samples.

We disclaim any liability for consequential and incidental damages. If you can't agree the above contents, you should inquire our sales.