

Product Search Data Sheet

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current. Please download the latest datasheet of CSTNE16M3V530000R0 from the official website of Murata

CSTNE16M3V530000R0










Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Consumer equipment,Industrial equipment except for transportation & facility & energy equipment,Medical equipment [GHTF A/B],Mobile Electronics Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.	



Appearance & Shape

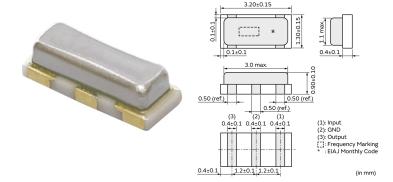



Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape 3000	



Features

MURATA's package technology expertise has enabled the development of the Chip CERALOCK.

High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

Features

- 1. Oscillation circuits do not require external load capacitors.
- 2. Available for a wide frequency range.
- 3. Extremely small and have a low profile.
- 4. No adjustment is necessary for oscillation circuits.
- 5. Stable supply is ensured due to not using precious metal(Palladium).

1 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of CSTNE16M3V530000R0 from the official website of Murata

http://www.murata.com/en-sq/products/productdetail?partno=CSTNE16M3V530000R0

CSTNE16M3V530000R0



Specifications

Product Type	Ceramic Resonator	
Froduct Type	(CERALOCK)	
	, ,	
Series	CSTNE_V	
Fraguency	16.384MHz	
Frequency	16.384WITZ	
Frequency Tolerance	+/-0.50% max.	
	, , , , , , , , , , , , , , , , , , , ,	
Operating Temperature	-40°C~85°C	
Range	40 C 00 C	
Frequency Shift by	10.000	
Temperature	+/-0.30% max.	
Frequency Aging	+/-0.20% max.	
Resonant Impedance (R1)	40ohm max	
Resoliant impedance (KT)	400IIII IIIax.	
Built-in Load Capacitance	455	
(CL1/CL2)	15pF	
Chana	SMD	
Shape	SIVID	
Wash	Not available	
VVGGII	140t dvallabio	
L x W (size)	3.2x1.3mm	
L X ** (5:25)	J.EXT.SIIIII	
Mass	16.972mg	

2 of 2

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

