



XDCAH73M350QHA03P0

In Production RoHS REACH

Appearance & Shape

Features



Murata's Crystal Filter with original thin wafer design technology based on long experience and activity realizes high reliability and is widely used in various applications such as business radio.

Applications

| | |
|-------------|------------|
| Other Usage | Industrial |
|-------------|------------|

Packaging Information

| Packaging | Specifications | Minimum Order Quantity |
|-----------|--------------------|------------------------|
| P0 | 330mm Plastic Tape | 3000 |

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

XDCAH73M350QHA03P0



Specifications


| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -20°C to 70°C |
| Center Frequency | 73.3500MHz |
| Nominal Center Value | Yes |
| Shape | SMD |
| 3dB Bandwidth | ±6.0kHzmin. |
| Stop Bandwidth | 25kHzmax. |
| Area of Stop Bandwidth | [40dB] |
| Insertion Loss(max.) | 4dB |
| Ripple(max.) | 1dB |
| Spurious Attenuation(min.) | 60dB |
| Stop Band Attenuation(min.) | 80dB |
| Termination Impedance | 450ohm // 4.0pF [Cc=9.2pF] |
| Number of Pole | 4 |

Attention


- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

XDCAH73M350QHA03P0


Product Data

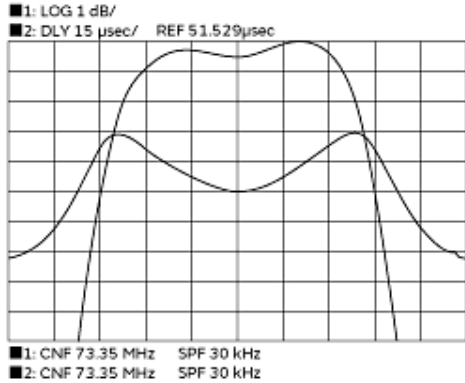

Frequency Characteristics

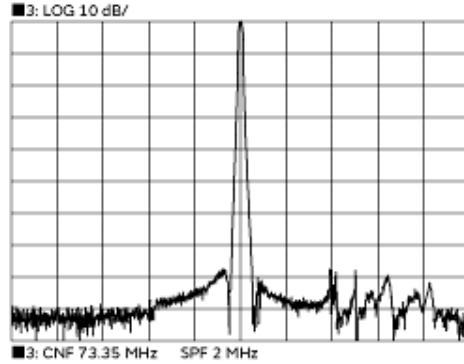

Spurious Response

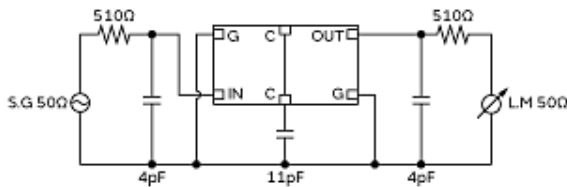

Measurement Circuit

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.