

Datasheet of SAW Device

SAW Duplexer

for Band30 / Unbalanced / LR /1814


Murata PN: SAYEY2G31BA0F0A



High Isolation

≻ LTE-A

➢ for 5GNR



Note : This Murata SAW Component is Consumer grade product and applicable for Cellular phone or similar end devices. Please also read Important Notice at the end of this document.

Revision
J




General Information

- Operating temperature	: -20 to +85 deg.C
- Storage temperature	: -40 to +85 deg.C
- Input Power	: +29.0dBm 5000h +55deg.C (1)
	+27.5dBm 5000h +55deg.C (2)
	(1) applicable for W-CDMA, SC-FDMA, DFT-s-OFDM
	(2) applicable for CP-OFDM
- D.C. Volatage between the terminals	: 3V (25+/-2 deg.C)
- Minimum Resistance between the terminals	: 10M ohm
- RoHS compliance	: Yes
- ESD (ElectroStatic Discharge) sensitive devi	ce
· · · · · · · · · · · · · · · · · · ·	

The input power shall be applied to Tx-port within own Tx passband frequency range.



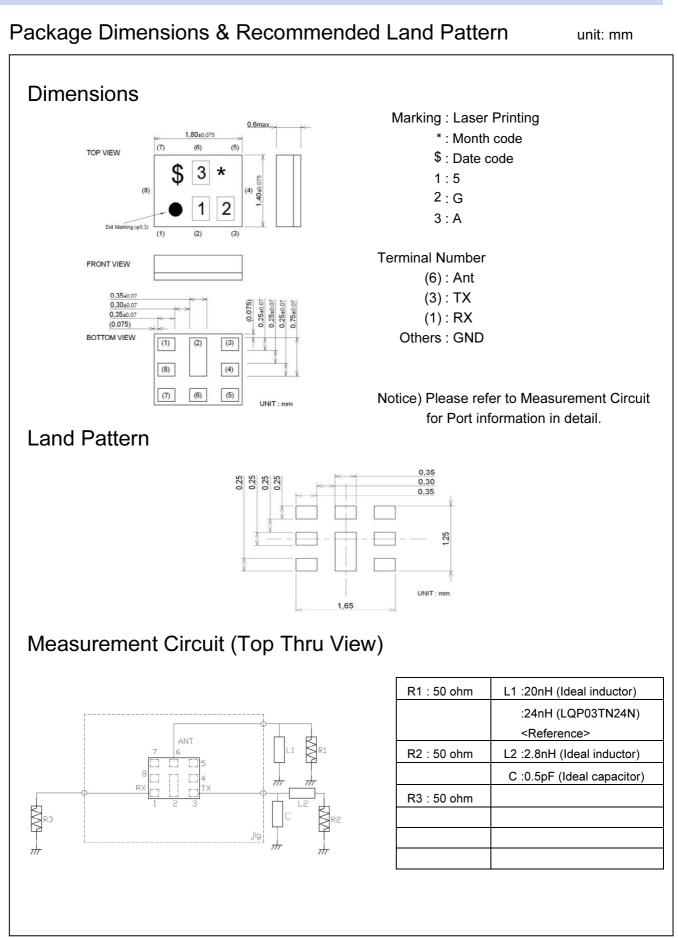



Electrical Characteristic $\langle TX \rightarrow ANT. \rangle$

		Characteristics (-20 to +85 deg.C)						
	$X \rightarrow ANT.$						Unit	Note
Center Frequency	1			min.	typ.* 2310	max.	MHz	
nsertion Loss	2305.25 to	2314.75	MHz		1.8	2.8	dB	
	2305.25 to	2314.75			1.8	2.7	dB	+23 to +27deg.C
	2307.5 to	2312.5	MHz		1.8	2.7	dBINT	Any 4.5MHz
	2307.5 to	2312.5	MHz		1.8	2.5	dBINT	+23 to +27deg.C ,Any 4.5MHz
Ripple Deviation	2305.25 to	2314.75			0.2	1.2	dB	Any 5MHz
VSWR	2305.25 to	2314.75			1.3	2.4		TX
	2305.25 to	2314.75			1.4	2.4		ANT.
Absolute Attenuation	10. to	1565.42		38	42		dB	FM, 921-960MHz
	1225. to	1250.	MHz	38	43		dB	GPS L2
	1559. to	1563.	MHz	38	44		dB	Compass
	1565.42 to	1573.37		38	44		dB	Wideband GPS lower side
	1573.37 to	1577.47		38	44		dB	Regular GPS main lobe
	1577.47 to	1585.42		38	44		dB	Wideband GPS upper side
	1597.55 to	1605.89		38	44		dB	GLONASS
	1605.88 to	1680.	MHz	38	44		dB	
	1805. to	1880.	MHz	38	46		dB	B3
	1900. to	1920.	MHz	40	47		dB	B33
	2010. to	2025.	MHz	40	49		dB	B34
	2110. to	2170. 2360.	MHz MHz	40 50	52 59		dB	B1
	2350. to						dB	RX band
	2400. to 2570. to	2485. 2620.	MHz MHz	40 40	50 51		dB dB	Integrated Att. per MHz B38
		2620.	MHz	40	51		dB	B7
		4630.	MHz	40	66		dB	2f
	4610. to	5950.	MHz	40	66		dB	ISM 5G
	6915. to	6945.	MHz	35	61		dB	3f
		0010.					4.5	
								l
				-			-	

Typical value at 25±2deg.C



Electrical Characteristic $\langle ANT. \rightarrow RX \rangle$

		Characteristics						
ANT. → RX					(-20 to +85 deg.C)			Note
				min.	typ.*	max.	Unit	
Center Frequency					2355		MHz	
Insertion Loss	2350.25 to	2359.75			2.3	2.9	dB	
	2350.25 to				2.3	2.9	dB	+23 to +27deg.C
	2352.5 to	2357.5	MHz		2.3	3.0	dB _{INT}	Any 4.5MHz
Dinala Daviation	2352.5 to 2350.25 to	2357.5	MHz		2.3 0.2	2.9 0.8	dB _{INT} dB	+23 to +27deg.C, Any 4.5MHz
Ripple Deviation VSWR	2350.25 to	2359.75 2359.75			1.7	2.0	uБ	Any 5MHz RX
VSWI(2350.25 to	2359.75			1.7	2.0		ANT.
Absolute Attenuation	1. to		MHz	36	41	2.0	dB	
	40. to	50.	MHz	50	86		dB	RX-TX
	2305. to	2315.	MHz	50	57		dB	ТХ
	2327. to	2337.	MHz	2.0	4.9		dB	(RX+TX)/2
	2336.2 to		MHz	1.8	3.1		dB	Averaged over 5MHz
	2400. to		MHz	40	46		dB	OoB rejection
	2400. to		MHz	40	46		dB	ISM2.4
	4900. to		MHz	40	55		dB	ISM 5G
	6960. to		MHz	40 40	49 48		dB	RX+2TX
	7050. to 9400. to		MHz MHz	40 20	48 44		dB dB	3f 4f
		9440. 11800.	MHz	20	44		dB dB	41 5f
	6000. to	12750.	MHz	15	36		dB dB	
	0000. [0	12750.		13	- 50		чD	
<u> </u>								* Typical value at 25±2deg.C

* Typical value at 25±2deg.C




Electrical Characteristic $\langle TX \rightarrow RX \rangle$


	$TX \rightarrow RX$	X → RX				Characteristics (-20 to +85 deg.C)			Note
							max.	Unit	
olation	2305.	to	2315.	MHz	55	57		dB	
Solation	2350.		2360.	MHz	55	59		dB	
	1574.	to	1577.	MHz	40	63		dB	
	4610.	to			35	52		dB	
	6915.	to	4620.	MHz	30	52		dB	
	0915.	to	6945.	MHz	30	50		uр	
						-			
					l				
	1				1	1			


* Typical value at 25±2deg.C



Electrical Characteristic

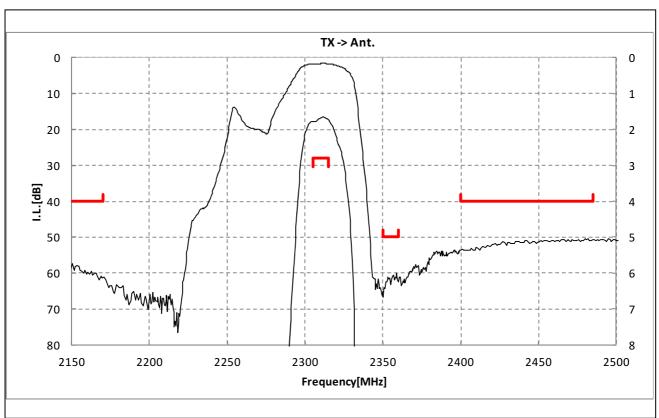

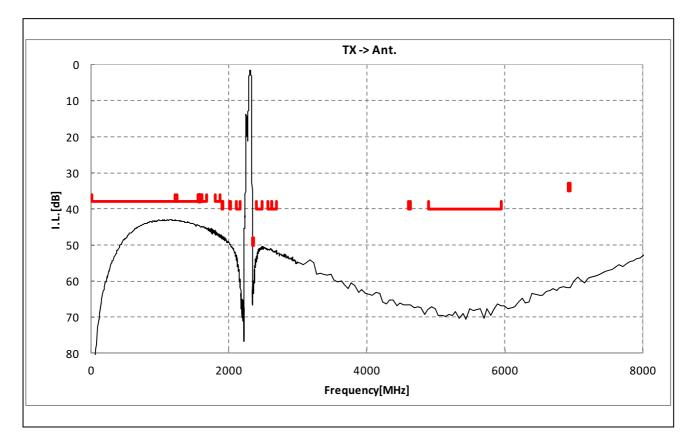







Electrical Characteristic

70

80

0

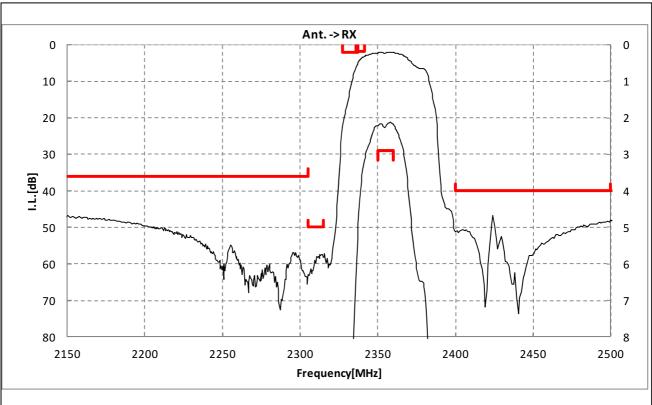

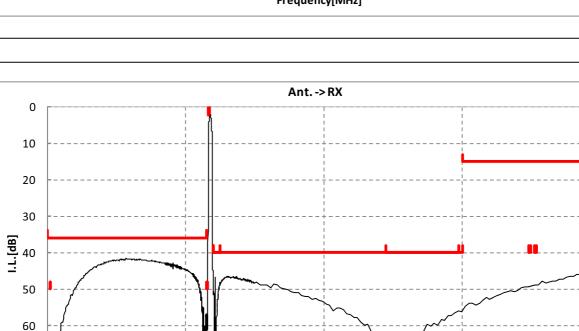

 $< ANT. \rightarrow RX >$

4000

Frequency[MHz]


6000


2000

8000



Electrical Characteristic

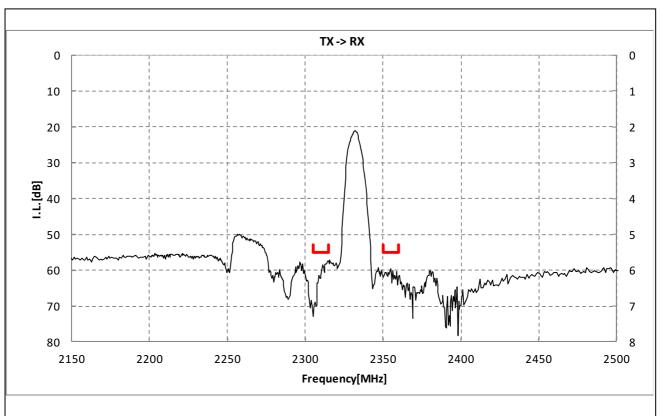

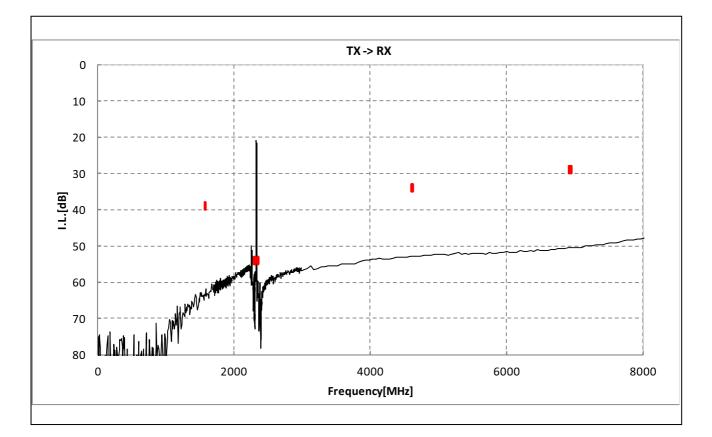







Dimensions of Tape & Reel unit: mm


Carrier Tape

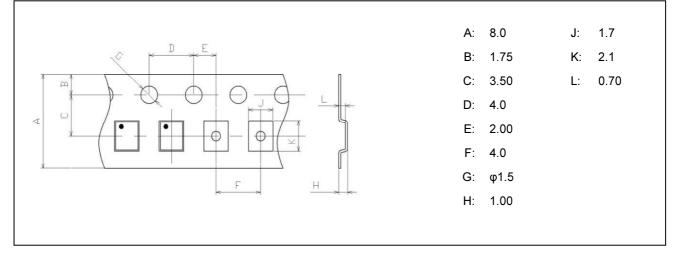

Tape

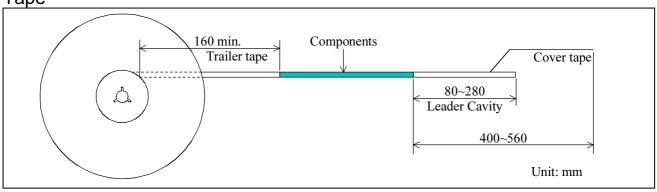

Reel

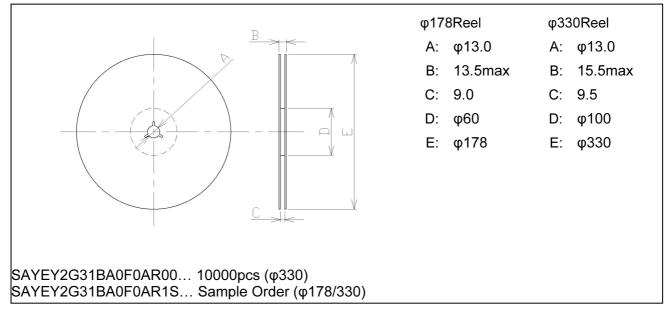



Important Notice (1/2)

PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product specified in the front page of this product specifications (the "Product" or "Products") when our Product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our Product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our Product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the Product is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such Products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The Product shall not be used for any application which requires especially high reliability or accuracy in order to prevent defect which incurs high possibility of damage to the third party's life, body or property such as the applications listed below as item (a) to (j) (the "Prohibited Application"). You acknowledge and agree that, if you use our Products in the Prohibited Applications, we will not be responsible for any damage caused by such use.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN THE PROHIBITED APPLICATIONS.

- (a) Aircraft equipment.
- (b) Aerospace equipment
- (c) Undersea equipment.
- (d) Power plant control equipment -
- (e) Medical equipment.
- (f) Transportation equipment (vehicles, automotive, trains, ships, etc.).
- (g)Traffic signal equipment.
- (h)Disaster prevention / crime prevention equipment.
- (i) Burning / explosion control equipment
- (j) Application of similar complexity and/ or reliability requirements to the applications listed in the above.

For the avoidance of doubt, the Product is not automotive grade, and will not support such requests for automotive as below, also not support other specific requests for automotive.

- AEC-Q200
- PPAP
- IATF16949,VDA6.3
- Zero Defect program
- Long product life cycle
- Automotive 8D failure analysis and report



Important Notice (2/2)

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the Product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device. When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our Products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our Products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use. Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The Product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

• the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the Product to be sold by you,

·deviation or lapse in function of engineering sample,

·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.