

Note: This datasheet may be out of date.

Please download the latest datasheet of LQH31MN101J03# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH31MN101J03%23

"#"at the end indicates the package specification code.

Size Code 3216 (1206) in mm (in inch)













< List of part numbers with package codes > LQH31MN101J03K LQH31MN101J03L




### **Applications**

	Let 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Consumer equipment, Medical
	equipment [GHTF A/B/C] except for
	implant & surgery & auto injector,
	Industrial equipment except for
	transportation & facility & energy
	equipment
Specific	Please refer to Our Website and
Applications	specifications, etc. for information about
	the performance, functions, quality,
	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.
Recommended	Canadianant
Applications	Consumer equipment



## Appearance & Shape

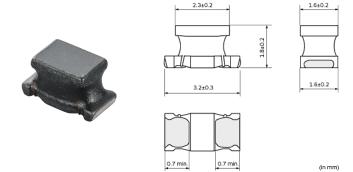



### **Notices**

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.

1 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQH31MN101J03# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH31MN101J03%23

"#"at the end indicates the package specification code.



### References

		Standard
Packaging	Specifications	Packing
		Quantity
К	330Embossed Tape	7500
L	180Embossed Tape	2000

Mass (typ.)		
7	1 piece	0.029g

2 of 4

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQH31MN101J03# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQH31MN101J03%23

"#"at the end indicates the package specification code.



## **Specifications**

I size	3.2±0.3mm
2 3/20	0.210.011111
W size	1.6±0.2mm
T size	1.8±0.2mm
Size code inch (mm)	1206 (3216)
Inductance	100μH±5%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	45mA
Max. of DC resistance	15.6Ω
DC resistance	12.0Ω±30%
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 85°C
Class of magnetic shield	Non-Shielded
Q(min.)	40
Q Test Frequency	2.5MHz
Self resonance frequency (min.)	7MHz
Brand	Murata
Series	LQH31MN_03

3 of 4

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.


Please download the latest datasheet of LQH31MN101J03# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-gb/products/productdetail?partno=LQH31MN101J03%2

"#"at the end indicates the package specification code.



### Characteristic Data

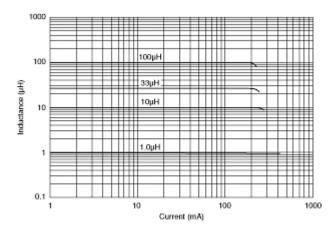



Impedance - Current Characteristics

Q-Frequency Characteristics

4 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

