

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18ANR10G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR10G0Z%23

"#"at the end indicates the package specification code.

Size Code 1608 (0603) in mm (in inch), Wound Type

LQW18ANR10G0ZD




< List of part numbers with package codes > LQW18ANR10G0ZB LQW18ANR10G0ZD LQW18ANR10G0ZJ

Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
Specific Applications	Consumer equipment,Automotive infotainment/comfort equipment,Medical equipment [GHTF A/B/C] except for implant & surgery & auto injector, Industrial equipment except for transportation & facility & energy equipment Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.
Recommended	Automotive infotainment/comfort
Applications	equipment







(in mm)

1 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQW18ANR10G0ZD

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18ANR10G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR10G0Z%23

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	500
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

Mass (typ.)	
1 piece	0.003g

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 4



LQW18ANR10G0ZD

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18ANR10G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR10G0Z%23

"#"at the end indicates the package specification code.



Specifications

L size	1.6±0.2mm
W size	0.8±0.2mm
T size	0.8±0.2mm
Size code inch (mm)	0603 (1608)
Inductance	100nH±2%
Inductance Test Frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	220mA
Max. of DC resistance	0.68Ω
Operating Temperature Range(Self-temperature rise is not included)	-55℃ to 125℃
Class of magnetic shield	Non-Shielded
Q(min.)	34
Q Test Frequency	150MHz
Self resonance frequency (min.)	1800MHz
Brand	Murata
Series	LQW18AN_0Z

3 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet


LQW18ANR10G0ZD


Characteristic Data

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18ANR10G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR10G0Z%23

"#"at the end indicates the package specification code.

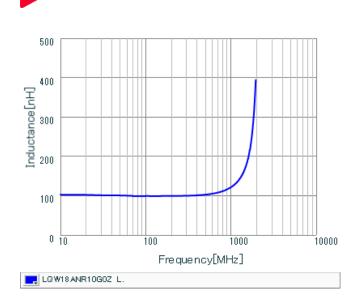

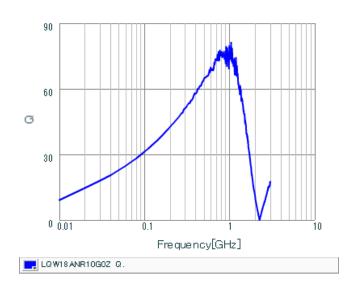

Inductance - Frequency Characteristics

Q-Frequency Characteristics

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



4 of 4