

Note: This datasheet may be out of date.

Please download the latest datasheet of LQW18ANR12G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR12G0Z%23

"#"at the end indicates the package specification code.

Size Code 1608 (0603) in mm (in inch), Wound Type

















< List of part numbers with package codes >

LQW18ANR12G0ZB

LQW18ANR12G0ZD

LQW18ANR12G0ZJ





Applications

11	Discount of the same to a second of the seco
Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Consumer equipment, Automotive
	infotainment/comfort equipment,Medical
	equipment [GHTF A/B/C] except for
	implant & surgery & auto injector,
	Industrial equipment except for
Specific Applications	transportation & facility & energy
	equipment
	Please refer to Our Website and
	specifications, etc. for information about
	the performance, functions, quality,
	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.
Recommended	Automotive infotainment/comfort
Applications	equipment



Appearance & Shape





1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



1 of 4



Note: This datasheet may be out of date.

Please download the latest datasheet of LQW18ANR12G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR12G0Z%23

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	500
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

Mass (typ.)	
1 piece	0.003g

2 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQW18ANR12G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR12G0Z%23

"#"at the end indicates the package specification code.



Specifications

L size	1.6±0.2mm
W size	0.8±0.2mm
T size	0.8±0.2mm
Size code inch (mm)	0603 (1608)
Inductance	120nH±2%
Inductance Test Frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	180mA
Max. of DC resistance	1.3Ω
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
Class of magnetic shield	Non-Shielded
Q(min.)	32
Q Test Frequency	150MHz
Self resonance frequency (min.)	1600MHz
Brand	Murata
Series	LQW18AN_0Z

3 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: This datasheet may be out of date.

80


Please download the latest datasheet of LQW18ANR12G0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQW18ANR12G0Z%23

"#"at the end indicates the package specification code.



Characteristic Data

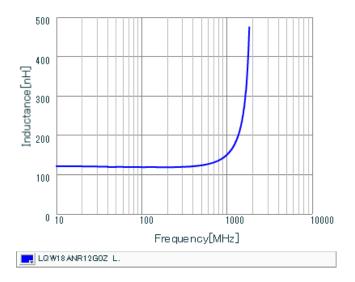



Inductance - Frequency Characteristics

Q-Frequency Characteristics

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

