

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH31CN101K03# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQH31CN101K03%23

"#"at the end indicates the package specification code.

Size Code 3216 (1206) in mm (in inch)













< List of part numbers with package codes > LQH31CN101K03K LQH31CN101K03L




## **Applications**

	Let 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Consumer equipment, Medical
	equipment [GHTF A/B/C] except for
	implant & surgery & auto injector,
	Industrial equipment except for
	transportation & facility & energy
	equipment
Specific	Please refer to Our Website and
Applications	specifications, etc. for information about
	the performance, functions, quality,
	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.
Recommended	Canadianant
Applications	Consumer equipment



## Appearance & Shape







### **Notices**

When rated current is applied to the products, inductance will be within ±10% of initial inductance value. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 35°C max.

1 of 4

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH31CN101K03# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQH31CN101K03%2

"#"at the end indicates the package specification code.



## References

		Standard
Packaging	Specifications	Packing
		Quantity
K	330Embossed Tape	7500
L	180Embossed Tape	2000

Mass (typ.)	
1 piece	0.029g

2 of 4

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH31CN101K03# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQH31CN101K03%23

"#"at the end indicates the package specification code.



# Specifications

L size	3.2±0.3mm
W size	1.6±0.2mm
T size	1.8±0.2mm
Size code inch (mm)	1206 (3216)
Inductance	100μH±10%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	80mA
Max. of DC resistance	15.6Ω
DC resistance	12.0Ω±30%
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 85°C
Class of magnetic shield	Non-Shielded
Self resonance frequency (min.)	7MHz
Brand	Murata
Series	LQH31CN_03

3 of 4

#### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.


Please download the latest datasheet of LQH31CN101K03# from the official website of Murata


http://www.murata.com/en/products/productdetail?partno=LQH31CN101K03%23

"#"at the end indicates the package specification code.




## Characteristic Data

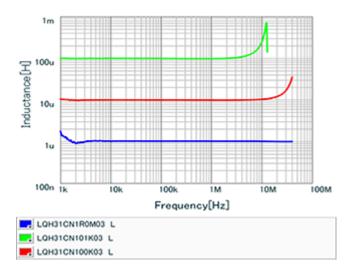



#### Inductance - Frequency Characteristics

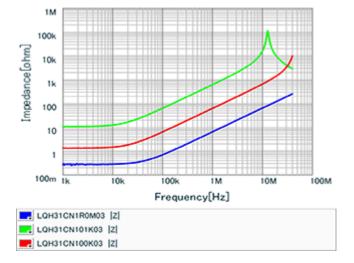

Impedance - Current Characteristics

Impedance - Frequency Characteristics

4 of 4

#### Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

