

Note: This datasheet may be out of date.

Please download the latest datasheet of LQH31MN100J03# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LQH31MN100J03%23

"#"at the end indicates the package specification code.

Size Code 3216 (1206) in mm (in inch)















< List of part numbers with package codes > LQH31MN100J03K LQH31MN100J03L




Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
	Consumer equipment,Medical	
	equipment [GHTF A/B/C] except for	
	implant & surgery & auto injector,	
	Industrial equipment except for	
	transportation & facility & energy	
	equipment	
Specific	Please refer to Our Website and	
Applications	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	
Recommended	Canaumar aguinment	
Applications	Consumer equipment	



Appearance & Shape

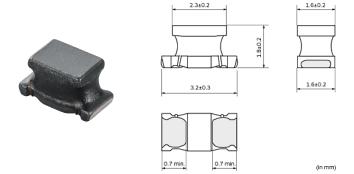



Notices

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.

1 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$





Note: This datasheet may be out of date.

Please download the latest datasheet of LQH31MN100J03# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LOH31MN100.I03%23

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
К	330Embossed Tape	7500
L	180Embossed Tape	2000

Mass (typ.)		
1 piece	0.029g	

2 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQH31MN100J03# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LOH31MN100.I03%2

"#"at the end indicates the package specification code.



Specifications

L size	3.2±0.3mm
W size	1.6±0.2mm
T size	1.8±0.2mm
Size code inch (mm)	1206 (3216)
Inductance	10μH±5%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	100mA
Max. of DC resistance	3.25Ω
DC resistance	2.5Ω±30%
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 85°C
Class of magnetic shield	Non-Shielded
Q(min.)	35
Q Test Frequency	5MHz
Self resonance frequency (min.)	20MHz
Brand	Murata
Series	LQH31MN_03

3 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.


Please download the latest datasheet of LQH31MN100J03# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en/products/productdetail?partno=LQH31MN100J03%23

"#"at the end indicates the package specification code.



Characteristic Data

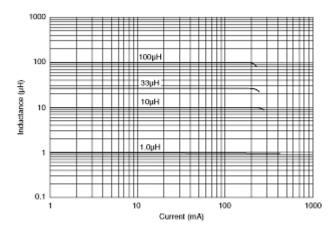

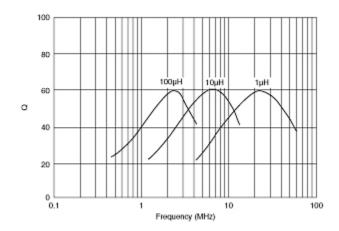

Impedance - Current Characteristics

Q-Frequency Characteristics

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

