



Note: This datasheet may be out of date. Please download the latest datasheet of CSTNE15M0V53C000R0 from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=CSTNE15M0V53C000R0

CSTNE15M0V53C000R0














Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Automotive powertrain/safety equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	



Appearance & Shape

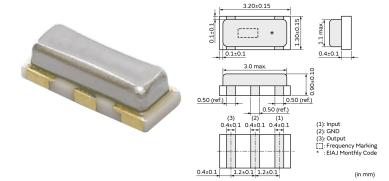



Manufacturing Co., Ltd.

Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000



Features

MURATA's package technology expertise has enabled the development of the Chip CERALOCK.

This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features

- 1. High reliability and available for a wide temperature range.
- 2. Oscillation circuits do not require external load capacitors.
- 3. Available for a wide frequency range.
- 4. Extremely small and have a low profile.
- 5. No adjustment is necessary for oscillation circuits.
- 6. Stable supply is ensured due to not using precious metal(Palladium).

1 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





Note: This datasheet may be out of date. $Please\ download\ the\ latest\ data sheet\ of\ CSTNE15M0V53C000R0\ from\ the\ official\ website\ of\ Muratangle and the statest of\ Muratangle and\ Muratang$ Manufacturing Co., Ltd.

http://www.murata.com/en-sg/products/productdetail?partno=CSTNE15M0V53C000R0

CSTNE15M0V53C000R0



Specifications

	Ceramic Resonator	
Product Type		
	(CERALOCK)	
Series	CSTNE_V_C	
Frequency	15.000MHz	
Fraguency Toloropeo	+/-0.50% max.	
Frequency Tolerance	T/-0.50 % IIIax.	
Operating Temperature	-40°C~125°C	
Range	-40 C* 125 C	
Frequency Shift by		
Temperature	+/-0.15% max.	
Frequency Aging	+/-0.10% max.	
Trequency riging	·/ 0.1070 max.	
Resonant Impedance (R1)	40ohm max.	
Duilt in Lond Conneitone		
Built-in Load Capacitance	15pF	
(CL1/CL2)		
Shape	SMD	
	+	
Wash	available	
L x)M (cize)	3.2x1.3mm	
L x W (size)	3.2x 1.311111	
Mass	16.972mg	
	1.0.0.23	

2 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

