

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQM18FN1R0M00# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQM18FN1R0M00%23

"#"at the end indicates the package specification code.

Size Code 1608 (0603) in mm (in inch)















< List of part numbers with package codes >

LQM18FN1R0M00B

LQM18FN1R0M00D

LQM18FN1R0M00J




Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
	Consumer equipment,Medical	
	equipment [GHTF A/B/C] except for	
	implant & surgery & auto injector,	
	Industrial equipment except for	
	transportation & facility & energy	
	equipment	
Specific	Please refer to Our Website and	
Applications	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	
Recommended	Canaumar aguinment	
Applications	Consumer equipment	



Appearance & Shape

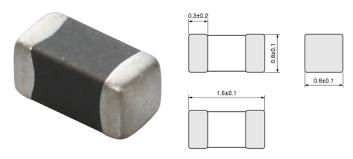

(in mm)

1 of 4

Attentior

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQM18FN1R0M00# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQM18FN1R0M00%2

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	1000
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

Mass (typ.)	
1 piece	0.005g

2 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQM18FN1R0M00# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQM18FN1R0M00%2

"#"at the end indicates the package specification code.



Specifications

L size	1.6±0.1mm
W size	0.8±0.1mm
T size	0.8±0.1mm
Size code inch (mm)	0603 (1608)
Inductance	1μH±20%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	150mA
Max. of DC resistance	0.26Ω
DC resistance	0.20Ω±30%
Operating Temperature Range(Self-temperature rise is not included)	-55°C to 125°C
Class of magnetic shield	Shielded (Ferrite Core)
Self resonance frequency (min.)	120MHz
Brand	Murata
Series	LQM18FN_00

3 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.


Please download the latest datasheet of LQM18FN1R0M00# from the official website of Murata


http://www.murata.com/en-sg/products/productdetail?partno=LQM18FN1R0M00%23

"#" at the end indicates the package specification code.



Characteristic Data





Impedance - Current Characteristics

Impedance - Frequency Characteristics

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$

