

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18AN12NG0Z# from the official website of Murata

http://www.murata.com/en-sq/products/productdetail?partno=LQW18AN12NG0Z%23

"#"at the end indicates the package specification code.

Size Code 1608 (0603) in mm (in inch), Wound Type

















< List of part numbers with package codes >

LQW18AN12NG0ZB

LQW18AN12NG0ZD

LQW18AN12NG0ZJ





Applications

| 11 | Discount of the same to a second of the seco | |
|---|--|--|
| Unsuitable | Please be sure to read and comply with | |
| Applications these "Precautions for use." | | |
| Specific Applications | Consumer equipment, Automotive | |
| | infotainment/comfort equipment,Medical | |
| | equipment [GHTF A/B/C] except for | |
| | implant & surgery & auto injector, | |
| | Industrial equipment except for | |
| | transportation & facility & energy | |
| | equipment | |
| | Please refer to Our Website and | |
| | specifications, etc. for information about | |
| | the performance, functions, quality, | |
| | management, and safety required for | |
| | the above applications, and use | |
| | Products after confirming the | |
| | performance and reliability of the actual | |
| | Product. | |
| Recommended | Automotive infotainment/comfort | |
| Applications | equipment | |



Appearance & Shape





1 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18AN12NG0Z# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQW18AN12NG0Z%2

"#"at the end indicates the package specification code.



References

| Packaging | Specifications | Standard Packing Quantity |
|-----------|------------------|---------------------------|
| В | Bulk(Bag) | 500 |
| D | 180mm Paper Tape | 4000 |
| J | 330mm Paper Tape | 10000 |

| Mass (typ.) | |
|-------------|--------|
| 1 piece | 0.003g |

2 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18AN12NG0Z# from the official website of Murata

http://www.murata.com/en-sq/products/productdetail?partno=LQW18AN12NG0Z%2

"#"at the end indicates the package specification code.



Specifications

| L size | 1.6±0.2mm |
|--|----------------|
| W size | 0.8±0.2mm |
| T size | 0.8±0.2mm |
| Size code inch (mm) | 0603 (1608) |
| Inductance | 12nH±2% |
| Inductance Test Frequency | 100MHz |
| Rated current (Itemp) (Based on Temperature rise) | 600mA |
| Max. of DC resistance | 0.13Ω |
| Operating Temperature Range(Self-temperature rise is not included) | -55°C to 125°C |
| Class of magnetic shield | Non-Shielded |
| Q(min.) | 35 |
| Q Test Frequency | 250MHz |
| Self resonance frequency (min.) | 6000MHz |
| Brand | Murata |
| Series | LQW18AN_0Z |

3 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$



Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.


Please download the latest datasheet of LQW18AN12NG0Z# from the official website of Murata


http://www.murata.com/en-sq/products/productdetail?partno=LQW18AN12NG0Z%23

"#"at the end indicates the package specification code.



Characteristic Data

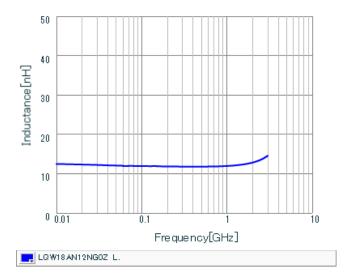

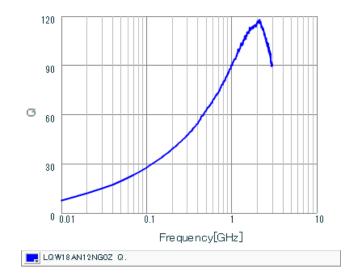

Inductance - Frequency Characteristics

Q-Frequency Characteristics

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

