

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18AN18NG0Z# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQW18AN18NG0Z%23

"#"at the end indicates the package specification code.

Size Code 1608 (0603) in mm (in inch), Wound Type

LQW18AN18NG0ZD



< List of part numbers with package codes > LQW18AN18NG0ZB LQW18AN18NG0ZD LQW18AN18NG0ZJ




Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
Specific Applications	Consumer equipment,Automotive infotainment/comfort equipment,Medical equipment [GHTF A/B/C] except for implant & surgery & auto injector, Industrial equipment except for transportation & facility & energy equipment Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.
Recommended	Automotive infotainment/comfort
Applications	equipment







(in mm)

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



1 of 4



LQW18AN18NG0ZD

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18AN18NG0Z# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQW18AN18NG0Z%23

"#"at the end indicates the package specification code.



References

		Standard
Packaging	Specifications	Packing
		Quantity
В	Bulk(Bag)	500
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

Mass (typ.)	
1 piece	0.003g

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 4



LQW18AN18NG0ZD

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

 $\label{eq:please} Please \ download \ the \ latest \ data sheet \ of \ LQW18AN18NG0Z\# \ from \ the \ official \ website \ of \ Murata$

http://www.murata.com/en-sg/products/productdetail?partno=LQW18AN18NG0Z%23

"#"at the end indicates the package specification code.



Specifications

L size	1.6±0.2mm
W size	0.8±0.2mm
T size	0.8±0.2mm
Size code inch (mm)	0603 (1608)
Inductance	18nH±2%
Inductance Test Frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	550mA
Max. of DC resistance	0.16Ω
Operating Temperature Range(Self-temperature rise is not included)	-55℃ to 125℃
Class of magnetic shield	Non-Shielded
Q(min.)	40
Q Test Frequency	250MHz
Self resonance frequency (min.)	5500MHz
Brand	Murata
Series	LQW18AN_0Z

3 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQW18AN18NG0ZD


Product Search Data Sheet

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQW18AN18NG0Z# from the official website of Murata

http://www.murata.com/en-sg/products/productdetail?partno=LQW18AN18NG0Z%23

"#"at the end indicates the package specification code.

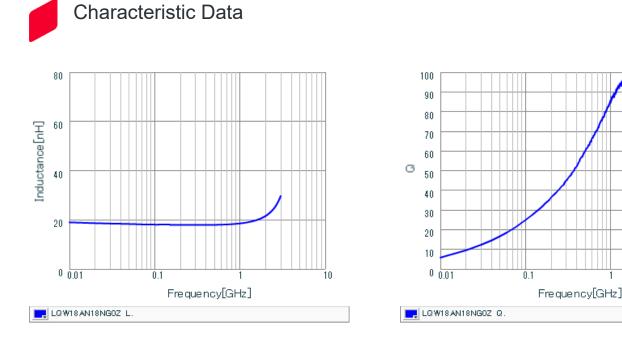

Q-Frequency Characteristics

10

Inductance - Frequency Characteristics

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



4 of 4