

LQG18HH1N8S00#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQG18HH1N8S00# from the official website of Murata

"#"at the end indicates the package specification code.

for Automotive















< List of part numbers with package codes >

LQG18HH1N8S00B

LQG18HH1N8S00D

LQG18HH1N8S00J




Applications

| Unsuitable | Please be sure to read and comply with | |
|--------------------------|--------------------------------------------|--|
| Applications | these "Precautions for use." | |
| Specific Applications | Consumer equipment, Automotive | |
| | infotainment/comfort equipment, | |
| | Automotive powertrain/safety equipment, | |
| | Medical equipment [GHTF A/B/C] | |
| | except for implant & surgery & auto | |
| | injector,Industrial Equipment | |
| | Please refer to Our Website and | |
| | specifications, etc. for information about | |
| | the performance, functions, quality, | |
| | management, and safety required for | |
| | the above applications, and use | |
| | Products after confirming the | |
| | performance and reliability of the actual | |
| | Product. | |
| Recommended | Automativa nawartrain/aafaty aguinment | |
| Applications | Automotive powertrain/safety equipment | |



Appearance & Shape

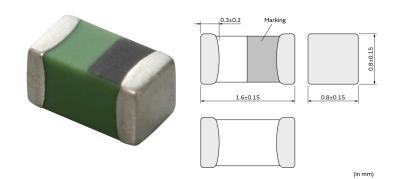

1 of 4

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQG18HH1N8S00#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQG18HH1N8S00# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQG18HH1N8S00%23

"#"at the end indicates the package specification code.



References

| Packaging | Specifications | Standard Packing Quantity |
|-----------|------------------|---------------------------------|
| В | Bulk(Bag) | 1000 |
| D | 180mm Paper Tape | 4000 |
| J | 330mm Paper Tape | 10000 |

| Mass (typ.) | |
|-------------|--------|
| 1 piece | 0.003g |

2 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LQG18HH1N8S00#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQG18HH1N8S00# from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=LQG18HH1N8S00%2

"#"at the end indicates the package specification code.



Specifications

| L size | 1.6±0.15mm |
|--------------------------------------------------------------------|----------------|
| W size | 0.8±0.15mm |
| T size | 0.8±0.15mm |
| Size code inch (mm) | 0603 (1608) |
| Inductance | 1.8nH±0.3nH |
| Inductance Test Frequency | 100MHz |
| Rated current (Itemp) (Based on Temperature rise) | 1100mA |
| Max. of DC resistance | 0.1Ω |
| Operating Temperature Range(Self-temperature rise is not included) | -55°C to 125°C |
| Class of magnetic shield | Non-Shielded |
| Q(min.) | 12 |
| Q Test Frequency | 100MHz |
| Self resonance frequency (min.) | 5000MHz |
| Brand | Murata |
| Series | LQG18HH_00 |

3 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



ch Data Sheet information provided may not be the most current.

Please download the latest datasheet of LQG18HH1N8S00# from the official website of Murata

http://www.murata.com/an.us/wadusts/wadustdatail?nartna-I_OC49LII.I1N9SC00//22

http://www.murata.com/en-us/products/productdetail?partno=LQG18HH1N8S00%23

LQG18HH1N8S00#


"#"at the end indicates the package specification code.


Note: If you have not downloaded this document from our official website, please note that the




Characteristic Data

The charts below may show another part number which shares its characteristics.

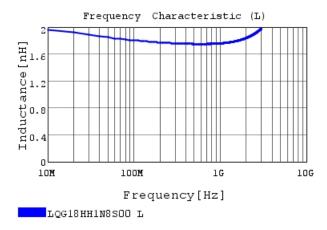

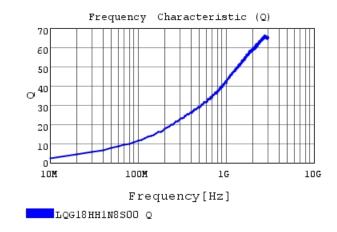

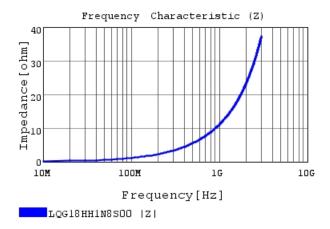

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

