

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18AN82NG0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW18AN82NG0Z%23

"#"at the end indicates the package specification code.

Size Code 1608 (0603) in mm (in inch), Wound Type

LQW18AN82NG0ZD




< List of part numbers with package codes > LQW18AN82NG0ZB LQW18AN82NG0ZD LQW18AN82NG0ZJ

Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
Specific Applications	Consumer equipment,Automotive infotainment/comfort equipment,Medical equipment [GHTF A/B/C] except for implant & surgery & auto injector,
Recommended	Automotive infotainment/comfort
Applications	equipment







(in mm)

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



1 of 4



LQW18AN82NG0ZD

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18AN82NG0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW18AN82NG0Z%23

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	500
D	180mm Paper Tape	4000
J	330mm Paper Tape	10000

Mass (typ.)	
1 piece	0.003g

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

2 of 4



LQW18AN82NG0ZD

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18AN82NG0Z# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=LQW18AN82NG0Z%23

"#"at the end indicates the package specification code.



Specifications

L size	1.6±0.2mm
W size	0.8±0.2mm
T size	0.8±0.2mm
Size code inch (mm)	0603 (1608)
Inductance	82nH±2%
Inductance Test Frequency	100MHz
Rated current (Itemp) (Based on Temperature rise)	250mA
Max. of DC resistance	0.6Ω
Operating Temperature Range(Self-temperature rise is not included)	-55℃ to 125℃
Class of magnetic shield	Non-Shielded
Q(min.)	34
Q Test Frequency	150MHz
Self resonance frequency (min.)	2000MHz
Brand	Murata
Series	LQW18AN_0Z

3 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





Product Search Data Sheet

Note: This datasheet may be out of date. Please download the latest datasheet of LQW18AN82NG0Z# from the official website of Murata Manufacturing Co., Ltd.


http://www.murata.com/en-us/products/productdetail?partno=LQW18AN82NG0Z%23


"#"at the end indicates the package specification code.



Characteristic Data

LQW18AN82NG0ZD

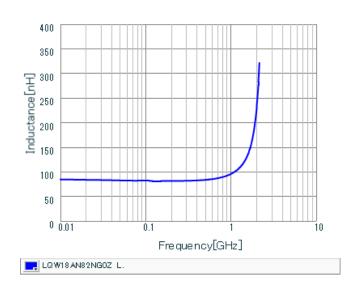

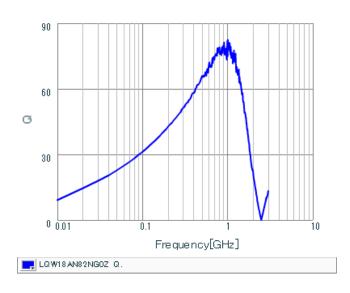

Inductance - Frequency Characteristics

Q-Frequency Characteristics

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



4 of 4