

Product Search Data Sheet

Note: This datasheet may be out of date. Please download the latest datasheet of CSTNE16M0V53C000R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=CSTNE16M0V53C000R0


CSTNE16M0V53C000R0



## Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Automotive powertrain/safety equipment
	Please refer to Our Website and
	specifications, etc. for information about
Specific	the performance, functions, quality,
Specific	management, and safety required for
Applications	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.

## Appearance & Shape

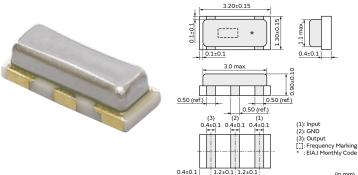


] 위	
0.1±0.1	0.4±0.1
3.0 max.	
0.50 (ref.)	
0.50 (ref.)	
(3) (2) (1)	
±0.1 0.4±0.1 0.4±0.1	(1): Input

(in mm)

Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000



MURATA's package technology expertise has enabled the development of the Chip CERALOCK.

This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

### Features

- 1. High reliability and available for a wide temperature range.
- 2. Oscillation circuits do not require external load capacitors.
- 3. Available for a wide frequency range.
- 4. Extremely small and have a low profile.
- 5. No adjustment is necessary for oscillation circuits.
- 6. Stable supply is ensured due to not using precious metal(Palladium).

1 of 2

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





# CSTNE16M0V53C000R0

Note: This datasheet may be out of date. Please download the latest datasheet of CSTNE16M0V53C000R0 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-us/products/productdetail?partno=CSTNE16M0V53C000R0

## Specifications

Product Type	Ceramic Resonator (CERALOCK)
Series	CSTNE_V_C
Frequency	16.000MHz
Frequency Tolerance	+/-0.50% max.
Operating Temperature Range	-40°C~125°C
Frequency Shift by Temperature	+/-0.15% max.
Frequency Aging	+/-0.10% max.
Resonant Impedance (R1)	40ohm max.
Built-in Load Capacitance (CL1/CL2)	15pF
Shape	SMD
Wash	available
L x W (size)	3.2x1.3mm
Mass	16.972mg

2 of 2

#### Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

