

Product Search Data Sheet

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of CSTNE19M2VH3L000R0 from the official website of Murata

CSTNE19M2VH3L000R0












Applications

Unsuitable	Please be sure to read and comply with	
Applications	ons these "Precautions for use."	
Specific Applications	Consumer equipment,Industrial equipment except for transportation & facility & energy equipment,Medical equipment [GHTF A/B],Mobile Electronics Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.	



Appearance & Shape

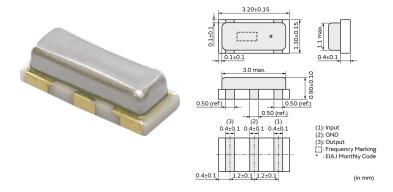



Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape 3000	



Features

MURATA's frequency adjustment and packaging technology expertise has enabled the development of the chip CERALOCK.

Features

- 1. Oscillation circuits do not require external load capacitors.
- 2. Available for a wide frequency range.
- 3. Extremely small and have a low profile.
- 4. No adjustment is necessary for oscillation circuits.
- 5. Stable supply is ensured due to not using precious metal(Palladium).

1 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



CSTNE19M2VH3L000R0



Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current. Please download the latest datasheet of CSTNE19M2VH3L000R0 from the official website of Murata



Specifications

Product Type	Ceramic Resonator
Series	(CERALOCK) CSTNE VH3L
Jenes	COTINE_VIISE
Frequency	19.200MHz
Frequency Tolerance	+/-0.07% max.
Operating Temperature Range	-40°C~85°C
Frequency Shift by	
Temperature	+/-0.11% max.
Frequency Aging	+/-0.07% max.
Resonant Impedance (R1)	40ohm max.
Built-in Load Capacitance (CL1/CL2)	15pF
Shape	SMD
Wash	Not available
L x W (size)	3.2x1.3mm
Mass	16.972mg

2 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

