

LQH3NPN6R8MMR#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN6R8MMR# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQH3NPN6R8MMR%2

"#"at the end indicates the package specification code.

Low DC Resistance Type













< List of part numbers with package codes > LQH3NPN6R8MMRE LQH3NPN6R8MMRF




Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
	Consumer equipment, Medical	
	equipment [GHTF A/B/C] except for	
	implant & surgery & auto injector,	
	Industrial equipment except for	
	transportation & facility & energy	
	equipment	
Specific	Please refer to Our Website and	
Applications	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	
Recommended	Canaumar aguinment	
Applications	ions Consumer equipment	



Appearance & Shape







Notices

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

1 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





LQH3NPN6R8MMR#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN6R8MMR# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQH3NPN6R8MMR%2

"#"at the end indicates the package specification code.



References

		Standard
Packaging	Specifications	Packing
		Quantity
E	180Embossed Tape E	2000
F	330Embossed Tape	8000

Mass (typ.)		
	1 piece	0.051g

2 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





LQH3NPN6R8MMR#

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN6R8MMR# from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=LQH3NPN6R8MMR%2

"#"at the end indicates the package specification code.



Specifications

L size	3.0±0.2mm
W size	3.0±0.2mm
T size	1.4±0.1mm
Size code inch (mm)	1212 (3030)
Inductance	6.8µH±20%
Inductance Test Frequency	1MHz
Rated current (Isat) (Based on Inductance change)	830mA
Rated current (Itemp) (Based on Temperature rise)	1250mA
Max. of DC resistance	0.186Ω
DC resistance	0.155Ω±20%
Operating Temperature Range (Self-temperature rise is included)	-40°C to 125°C
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 85°C
Class of magnetic shield	Shielded (Magnetic Resin)
Self resonance frequency (min.)	40MHz
Brand	Murata
Series	LQH3NPN_MR

3 of 4

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.



Floudet Sealett Data Stier

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of LQH3NPN6R8MMR# from the official website of Murata


http://www.murata.com/en/products/productdetail?partno=LQH3NPN6R8MMR%2


"#"at the end indicates the package specification code.



Characteristic Data

LQH3NPN6R8MMR#

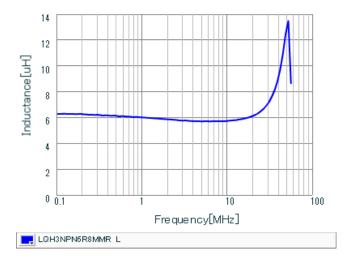

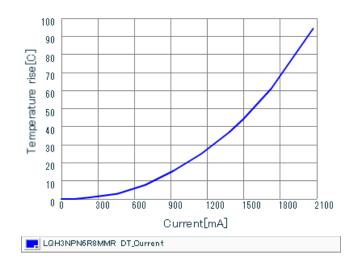

Inductance - Frequency Characteristics

Temperature Increase Characteristic

4 of 4

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

 $2. This \ data{sheet has only typical specifications because there is no \ space for \ detailed \ specifications.}$

