



### FEATURES

- UL 60950 recognised
- Typical efficiency to 89%
- Wide temperature performance at full load, -40°C to 85°C
- Industry standard pinout
- 1kVDC isolation 'Hi Pot Test'
- 5V, 12V, 15V, 24V & 48V inputs
- 5V, 9V, 12V & 15V outputs
- No external components required
- No electrolytic or tantalum capacitors
- Pin compatible with CMR, CRR1, NMG & NMR series

### PRODUCT OVERVIEW

The MER1 series is the new high performance version of our 1W NMR series. The MER1 series is more efficient and offers improved regulation performance for applications where a wide output voltage variation cannot be tolerated. They are ideally suited for providing local supplies on control system boards with the added benefit of 1kVDC galvanic isolation to reduce switching noise.

### SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage	Output Current	Input Current at Rated Load	Load Regulation (Typ)	Load Regulation (Max)	Ripple & Noise (Typ) <sup>1</sup>	Ripple & Noise (Max) <sup>1</sup>	Efficiency (Min.)	Efficiency (Typ.)	Isolation Capacitance	MTTF <sup>2</sup>	Recommended Alternative
	V	V	mA	mA	%	%	mVp-p	mVp-p	%	%	pF	kHrs	
<span style="border: 1px solid green; border-radius: 5px; padding: 2px;">Recommended</span> <span style="border: 1px solid blue; border-radius: 5px; padding: 2px; margin-left: 20px;">In Production</span>													
MER1S0505SC	5	5	200	233	5.5	6.5	15	25	82	84	50	7684	
MER1S0509SC	5	9	111	226	4.2	5	11	20	84	87	55	7698	
MER1S0512SC	5	12	84	227	4.6	5.2	9	17	85	87	53	7175	
MER1S0515SC	5	15	67	225	4.4	5	9	17	86	87.5	54	6496	
MER1S1205SC	12	5	200	97	4.5	5	11	20	82	84	49	7569	
MER1S1209SC	12	9	111	95	3	3.4	9	17	84	86.5	66	7317	
MER1S1212SC	12	12	84	93	3	3.4	9	17	86	88.5	91	6647	
MER1S1215SC	12	15	67	94	2.4	2.7	7	17	85	88	78	6279	
MER1S1505SC	15	5	200	79	3.8	4.5	10	20	81	83.5	43	7167	
MER1S1515SC	15	15	67	75	2.4	2.8	7	15	86	89	107	5916	
MER1S2405SC	24	5	200	50	3.1	3.7	15	25	81	84	52	7391	
MER1S2412SC	24	12	84	48	1.8	2.4	9	20	84	87.5	91	6772	
MER1S2415SC	24	15	67	48	1.7	2.3	9	20	84	87.5	101	5957	
MER1S4805SC	48	5	200	26	3.4	3.9	19	30	77	79.5	47	7354	
MER1S4812SC	48	12	84	25	2.0	2.4	12	25	79	82.5	88	7088	
MER1S4815SC	48	15	67	25	1.9	2.4	11	25	80	83	103	7238	
<span style="border: 1px solid orange; border-radius: 5px; padding: 2px;">NRND</span>													
MER1S1509SC	15	9	111	77	2.4	2.8	8	17	83	86.5	68	6906	MEV1S1509SC
MER1S1512SC	15	12	84	76	2.3	2.7	7	15	84	87.5	75	6523	Contact Murata
MER1S2409SC	24	9	111	48	2.1	2.5	10	20	83	86.5	75	6490	MEV1S2409SC
MER1S4809SC	48	9	111	25	2.4	2.8	14	25	80	83	76	7120	MEV1S4809SC

### INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage Range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	
	Continuous operation, 15V input types	13.5	15	16.5	
	Continuous operation, 24V input types	21.6	24	26.4	
	Continuous operation, 48V input types	43.2	48	52.8	
Reflected Ripple Current	5V input types		7	15	mA p-p
	12V input types		4	12	
	15V input types		4	12	
	24V input types		8	20	
	48V input types		25	40	



For full details go to [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)



1. See Ripple & Noise characterisation method.

2. Calculated using MIL-HDBK-217F FN2 with nominal input voltage at full load.

All specifications typical at T<sub>a</sub>=25°C, nominal input voltage and rated output current unless otherwise specified.

OUTPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	T <sub>A</sub> =-40°C to 85°C			1	W
Voltage Set Point Accuracy	See tolerance envelope				
Line regulation	High V <sub>IN</sub> to low V <sub>IN</sub>		1.05	1.1	%/%

ISOLATION CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation test voltage	Flash tested for 1 second	1000			VDC
Resistance	Viso= 1000VDC	10			GΩ

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	5V & 48V input types		62		kHz
	12V & 15V input types		75		
	24V input types		82		

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types	-40		85	°C
Storage		-50		125	
Case Temperature rise above ambient	5V, 12V, & 15V input types			15	
	24V & 48V input types			20	
Cooling	Free air convection				

ABSOLUTE MAXIMUM RATINGS	
Lead temperature 1mm from case for 10 seconds	260°C
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to <a href="#">application notes</a> for further information.
Input voltage V <sub>IN</sub> , 5Vin types	7V
Input voltage V <sub>IN</sub> , 12Vin types	15V
Input voltage V <sub>IN</sub> , 15Vin types	18V
Input voltage V <sub>IN</sub> , 24Vin types	28V
Input voltage V <sub>IN</sub> , 48Vin types	54V



**CHARACTERISATION TEST METHODS**


**Ripple & Noise Characterisation Method**

Ripple and noise measurements are performed with the following test configuration.

C1	1µF X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10µF tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100mΩ at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450Ω resistor, carbon film, ±1% tolerance
R2	50Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires

Measured values are multiplied by 10 to obtain the specified values.

**Differential Mode Noise Test Schematic**

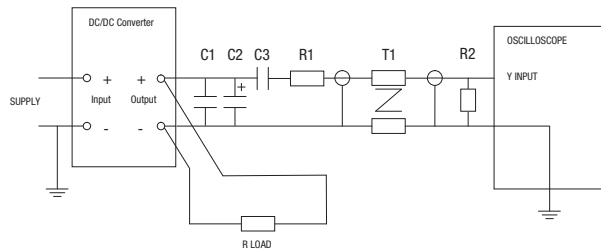

**APPLICATION NOTES**

**Minimum load**


The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically double the specified output voltage if the output load falls to less than 5%.

**Capacitive loading and start up**

Typical start up times for this series, with a typical input voltage rise time of 2.2µs and output capacitance of 10µF, are shown in the table below. The product series will start into a capacitance of 47µF with an increased start time, however, the maximum recommended output capacitance is 10µF.

	Start-up time		Start-up time	
	µs		µs	
MER1S0505SC	600	MER1S1512SC	3375	
MER1S0509SC	1730	MER1S1515SC	5090	
MER1S0512SC	3780	MER1S2405SC	431	
MER1S0515SC	6700	MER1S2409SC	245	
MER1S1205SC	750	MER1S2412SC	1634	
MER1S1209SC	2605	MER1S2415SC	2682	
MER1S1212SC	3754	MER1S4805SC	512	
MER1S1215SC	5280	MER1S4809SC	1432	
MER1S1505SC	704	MER1S4812SC	2528	
MER1S1509SC	1859	MER1S4815SC	3884	

**Typical Start-Up Wave Form**



**APPLICATION NOTES (Continued)**

**Output Ripple Reduction**


By using the values of inductance and capacitance stated, the output ripple at the rated load is lowered to 5mV p-p max.

**Component selection**

**Capacitor:** It is required that the ESR (Equivalent Series Resistance) should be as low as possible, ceramic types are recommended.

The voltage rating should be at least twice (except for 15V output), the rated output voltage of the DC-DC converter.

**Inductor:** The rated current of the inductor should not be less than that of the output of the DC-DC converter. At the rated current, the DC resistance of the inductor should be such that the voltage drop across the inductor is <2% of the rated voltage of the DC-DC converter. The SRF (Self Resonant Frequency) should be >20MHz.

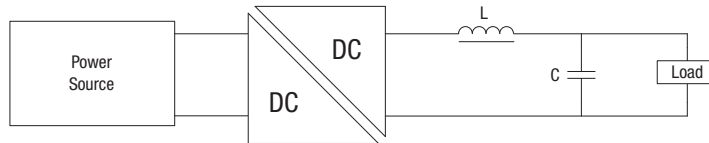


	Inductor			Capacitor
	L, $\mu$ H	SMD	Through Hole	C, $\mu$ F
MER1S0505SC	10	82103C	11R103C	4.7
MER1S0509SC	22	82223C	11R223C	2.2
MER1S0512SC	47	82473C	11R473C	1
MER1S0515SC	47	82473C	11R473C	1
MER1S1205SC	10	82103C	11R103C	4.7
MER1S1209SC	22	82223C	11R223C	2.2
MER1S1212SC	47	82473C	11R473C	1
MER1S1215SC	47	82473C	11R473C	1
MER1S1505SC	10	82103C	11R103C	4.7
MER1S1509SC	22	82223C	11R223C	2.2
MER1S1512SC	47	82473C	11R473C	1
MER1S1515SC	47	82473C	11R473C	1
MER1S2405SC	10	82103C	11R103C	4.7
MER1S2409SC	22	82223C	11R223C	2.2
MER1S2412SC	47	82473C	11R473C	1
MER1S2415SC	47	82473C	11R473C	1
MER1S4805SC	10	82103C	11R103C	4.7
MER1S4809SC	22	82223C	11R223C	2.2
MER1S4812SC	47	82473C	11R473C	1
MER1S4815SC	47	82473C	11R473C	1


**TOLERANCE ENVELOPES**

The voltage tolerance envelope shows typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading.

**All versions**

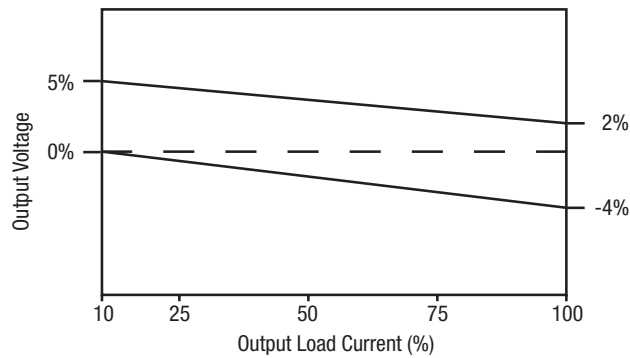


**TEMPERATURE DERATING GRAPH**

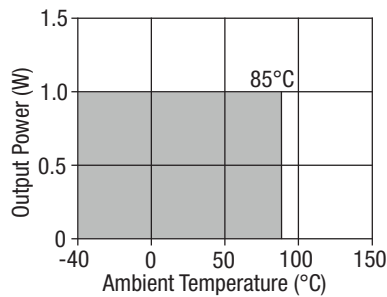


**EFFICIENCY VS LOAD**


**MER1S05XXSC**

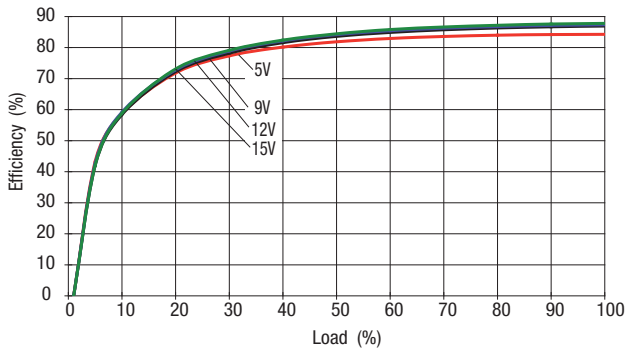


**MER1S12XXSC**

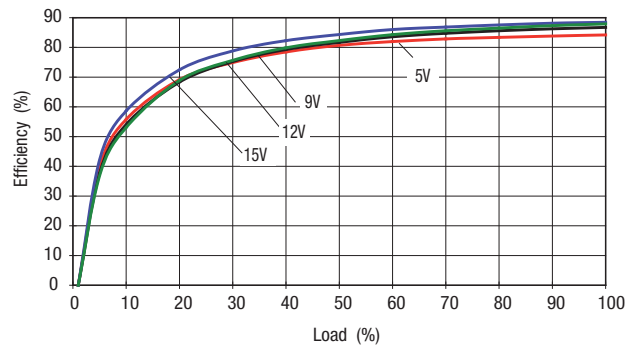


**MER1S15XXSC**

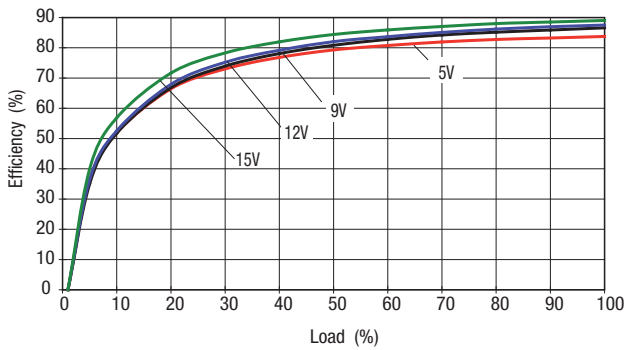

**MER1S24XXSC**

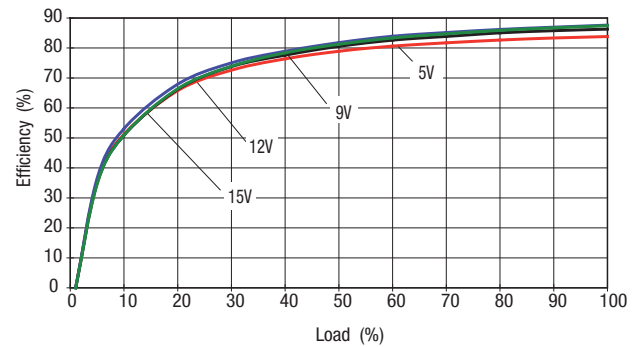


**MER1S48XXSC**

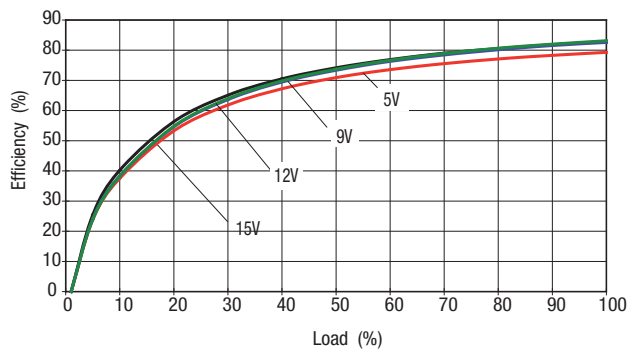

**EMC FILTERING AND SPECTRA**


**FILTERING**

An input capacitor and inductor is required to meet EN 55022 Curve B, Quasi-Peak EMC limit, as shown in the following plots. The following plots show positive and negative quasi peak and CISPR22 Average Limit B (green line) and Quasi Peak Limit B (pink line) adherence limits.

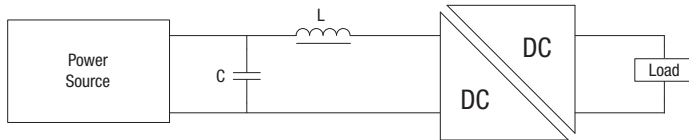


	Inductor			Capacitor C, $\mu$ F
	L, $\mu$ H	SMD	Through Hole	
MER1S0505SC	10	82103C	11R103C	2.2
MER1S0509SC	10	82103C	11R103C	2.2
MER1S0512SC	10	82103C	11R103C	1
MER1S0515SC	10	82103C	11R103C	2.2
MER1S1205SC	10	82103C	11R103C	2.2
MER1S1209SC	10	82103C	11R103C	2.2
MER1S1212SC	10	82103C	11R103C	0.68
MER1S1215SC	10	82103C	11R103C	2.2
MER1S1505SC	10	82103C	11R103C	2.2
MER1S1509SC	10	82103C	11R103C	1
MER1S1512SC	10	82103C	11R103C	1
MER1S1515SC	10	82103C	11R103C	1
MER1S2405SC	10	82103C	11R103C	2.2
MER1S2409SC	10	82103C	11R103C	2.2
MER1S2412SC	10	82103C	11R103C	2.2
MER1S2415SC	10	82103C	11R103C	2.2
MER1S4805SC	10	82103C	11R103C	4.7
MER1S4809SC	10	82103C	11R103C	4.7
MER1S4812SC	10	82103C	11R103C	4.7
MER1S4815SC	10	82103C	11R103C	4.7

**MER1S0505SC**






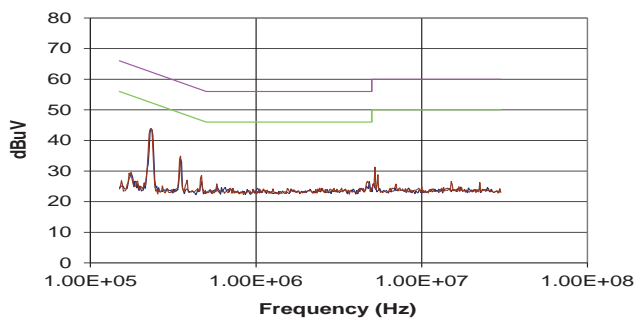


**MER1S0509SC**






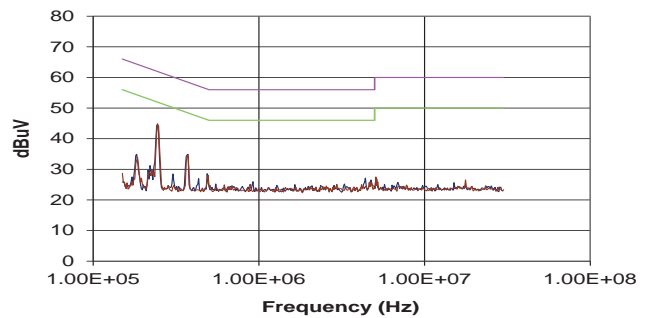










EMC FILTERING AND SPECTRA (Continued)

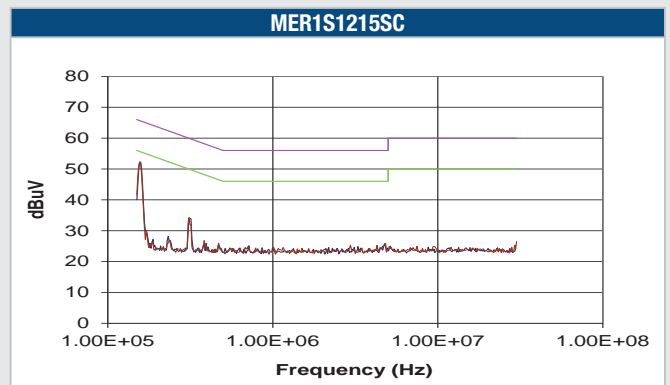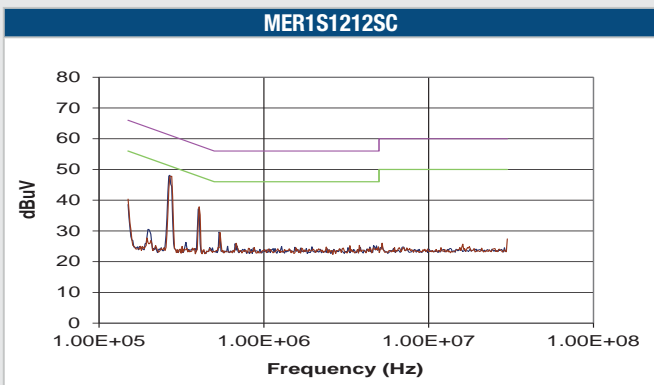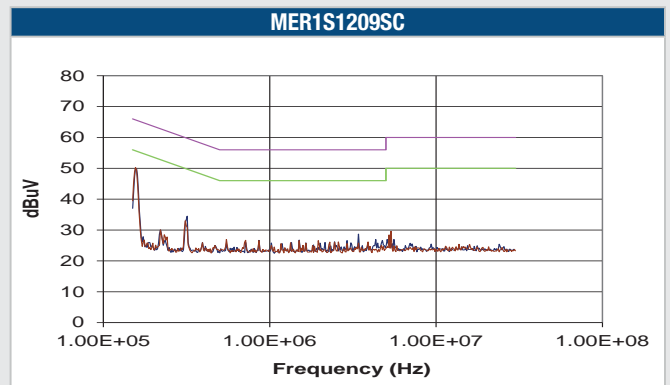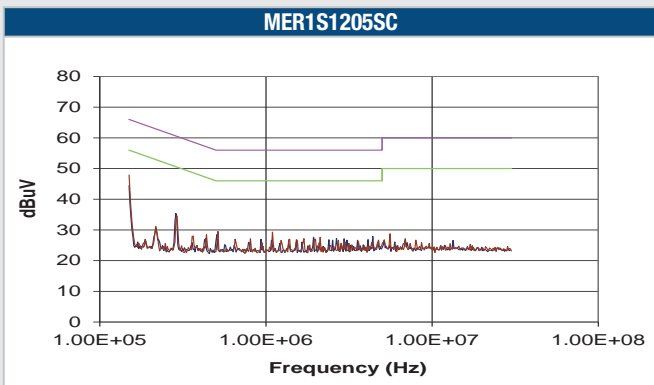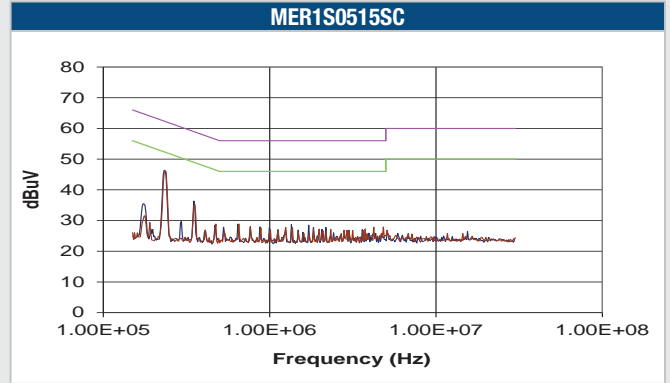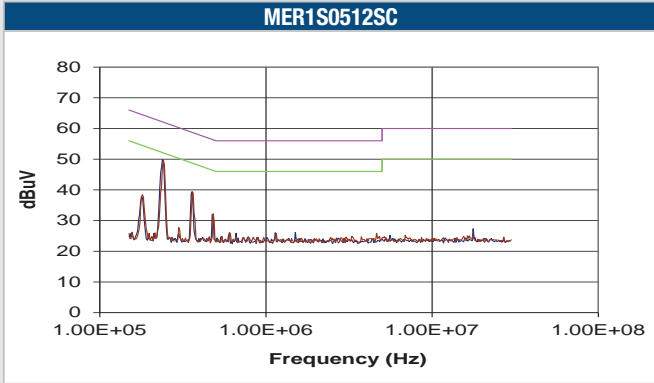

EMC FILTERING AND SPECTRA (Continued)

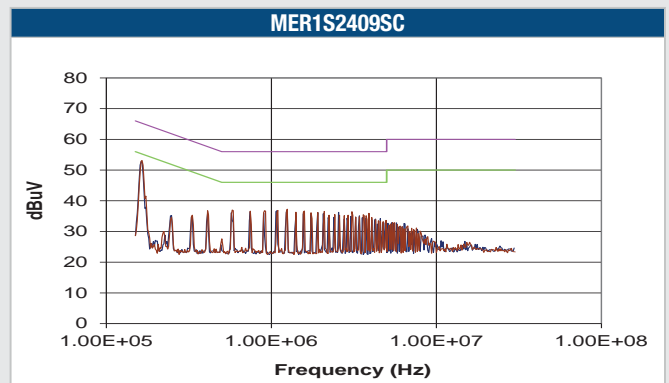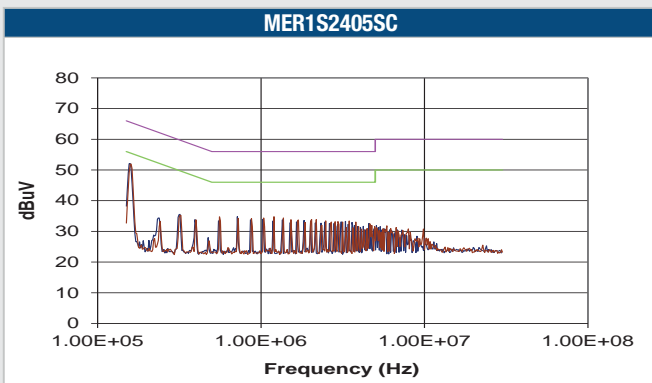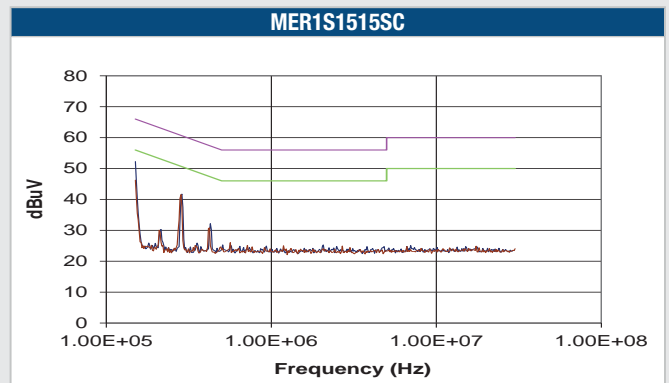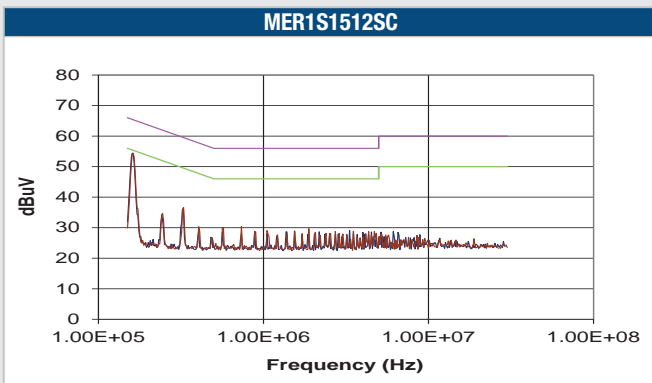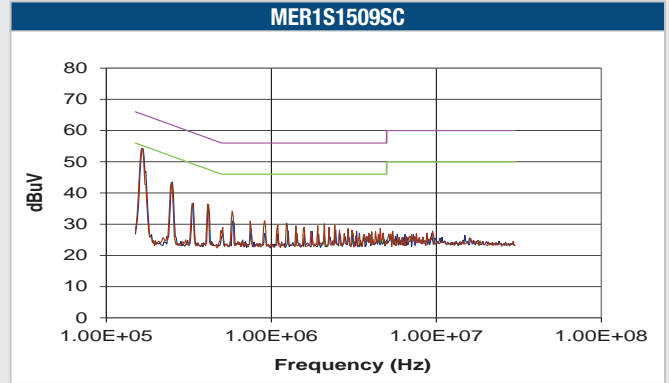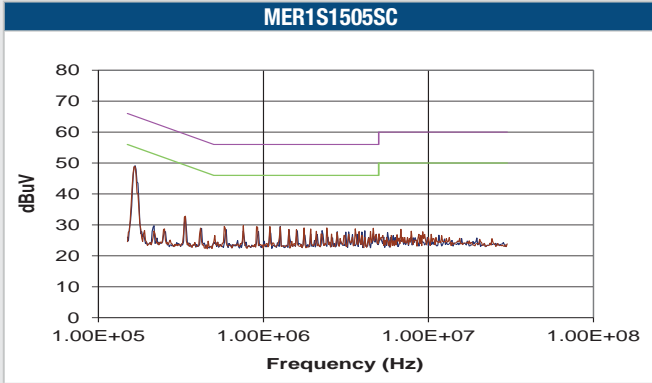


EMC FILTERING AND SPECTRA (Continued)

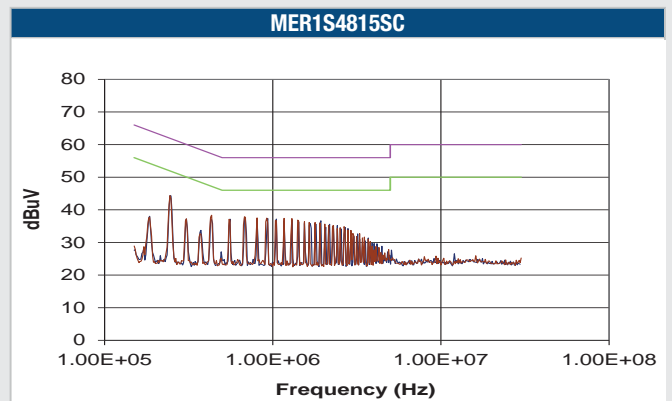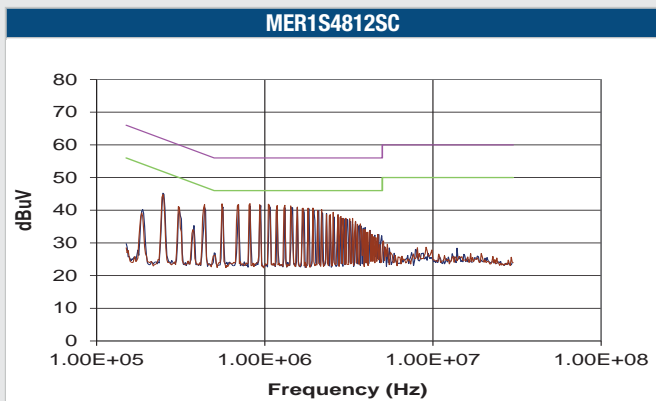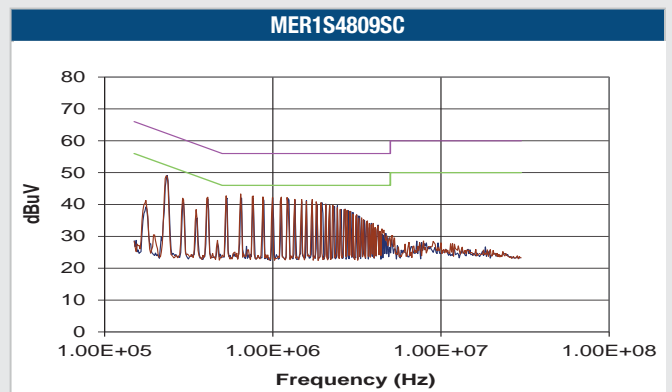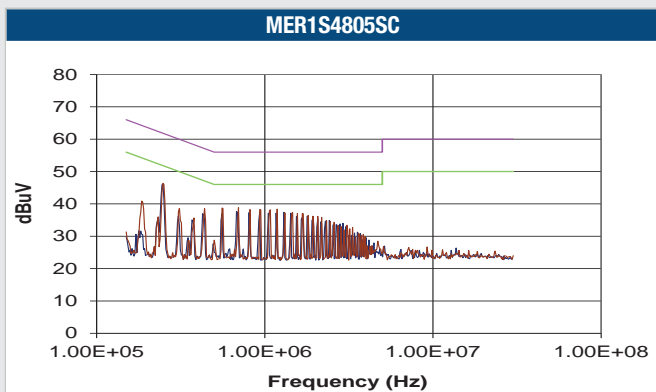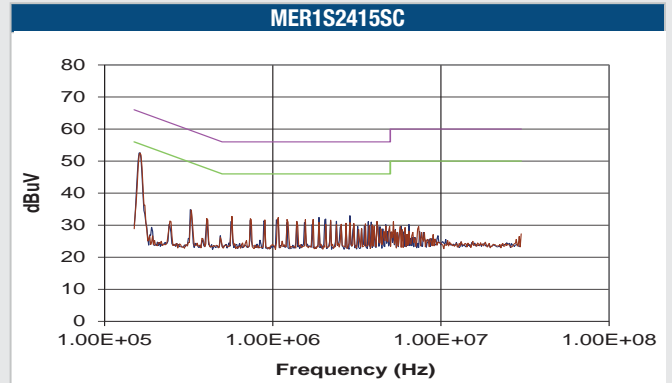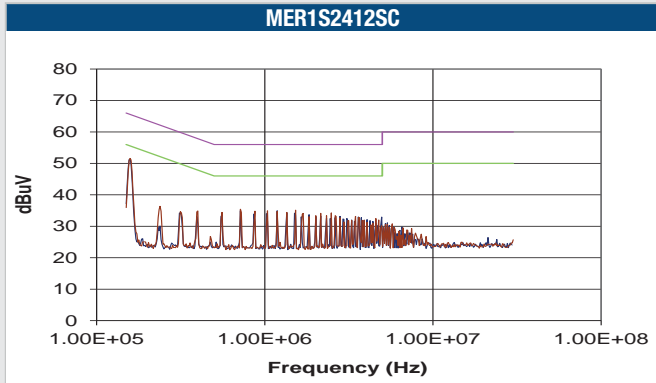

**PACKAGE SPECIFICATIONS**

**MECHANICAL DIMENSIONS**

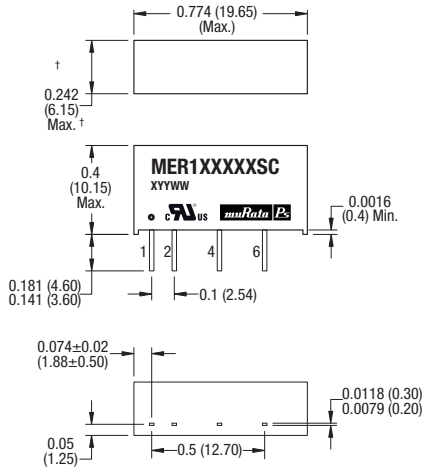


† 48V input variants: 7.65 (0.301) MAX.  
 Unless otherwise stated, all dimensions in inches ±0.05mm (0.002").  
 Controlling dimension is mm.  
 All pins on a 2.54mm (0.100") pitch and within 0.25mm (0.010") of true position.  
 Weight: 48Vin types: 2.75g (Typ.)  
 All other types: 2.25g (Typ.)


**PIN CONNECTIONS**

Pin	Function
1	+VIN
2	-VIN
4	-VOUT
6	+VOUT

**RECOMMENDED FOOTPRINT DETAILS**

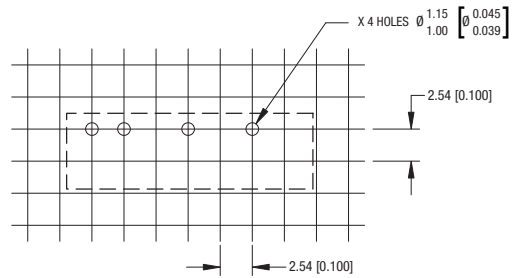

**TUBE OUTLINE DIMENSIONS**

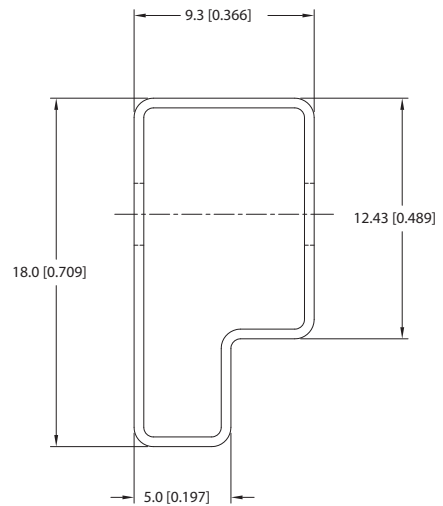

Unless otherwise specified all dimensions in mm [inches] ±0.55mm [0.022].  
 Tube Length : 520mm [20.472] ±2.0 [0.079].  
 Tube Quantity : 25

**DISCLAIMER**

Unless otherwise stated in the datasheet, all products are designed for standard commercial and industrial applications and NOT for safety-critical and/or life-critical applications.

Particularly for safety-critical and/or life-critical applications, i.e. applications that may directly endanger or cause the loss of life, inflict bodily harm and/or loss or severe damage to equipment/property, and severely harm the environment, a prior explicit written approval from Murata is strictly required. Any use of Murata standard products for any safety-critical, life-critical or any related applications without any prior explicit written approval from Murata shall be deemed unauthorised use.

These applications include but are not limited to:

- Aircraft equipment
- Aerospace equipment
- Undersea equipment
- Power plant control equipment
- Medical equipment
- Transportation equipment ( automobiles, trains, ships, etc.)
- Traffic signal equipment
- Disaster prevention / crime prevention equipment
- Data Processing equipment

Murata makes no express or implied warranty, representation, or guarantee of suitability, fitness for any particular use/purpose and/or compatibility with any application or device of the buyer, nor does Murata assume any liability whatsoever arising out of unauthorised use of any Murata product for the application of the buyer. The suitability, fitness for any particular use/purpose and/or compatibility of Murata product with any application or device of the buyer remain to be the responsibility and liability of the buyer.

Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify and hold Murata, its affiliated companies, and its representatives harmless against any damages arising out of unauthorised use of any Murata products in any safety-critical and/or life-critical applications.

Remark: Murata in this section refers to Murata Manufacturing Company and its affiliated companies worldwide including, but not limited to, Murata Power Solutions.



This product is subject to the following [operating requirements](#) and the [Life and Safety Critical Application Sales Policy](#):

Refer to: <https://www.murata.com/en-eu/products/power/requirements>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.

© 2021 Murata Power Solutions (Milton Keynes) Ltd.