


Product Search Data Sheet

TZW4Z1R5A001R00

Discontinued RoHS REACH

Appearance & Shape

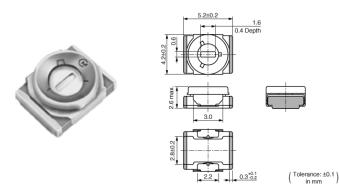

Note: This datasheet may be out of date. Please download the latest datasheet of TZW4Z1R5A001R00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=TZW4Z1R5A001R00



1. To meet high power application due to withstanding voltage $550 \, \text{Vdc}.$

- 2. Extremely high self-resonant frequency. (More than 3GHz at rated C max.)
- 3. Typical application: Impedance matching for Cellular Base Station.
- 4. High Q value in more than VHF, UHF and Microwave bands. (More than 200 in 500MHz, C max.)
- 5. Available for pick and place machine. Possible thinner design due to 2.6mm low profile.
- 6. Non-electrical contact construction (rotor as middle electrode) provides high reliability.
- 7. Compact size: 4.2(W)x5.2(L)x2.6max.(H)mm.

Packaging Information

| Packaging | Specifications | Standard Packing Quantity |
|-----------|---------------------|---------------------------------|
| R00 | 180mm Embossed Tape | 500 |

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





TZW4Z1R5A001R00

Note: This datasheet may be out of date. Please download the latest datasheet of TZW4Z1R5A001R00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=TZW4Z1R5A001R00

Specifications

| Shape | SMD | |
|--------------------------------|--------------------------|--|
| Operating Temperature Range | -55°C to 125°C | |
| Thickness | 2.6mm | |
| Thickness Tolerance | max. | |
| Rated Voltage | 250Vdc | |
| Cmin.(max.) | 0.4pF | |
| Cmax. | 1.5pF | |
| Cmax. Tolerance | +100/-0% | |
| Adjustment Direction | Тор | |
| тс | NP0±150ppm/°C | |
| Q | 200min. at 500MHz, Cmax. | |
| Withstanding Voltage | 550Vdc | |
| Insulation Resistance(min.) | 10000ΜΩ | |
| Torque | 1.5 to 10.0mNm | |
| Mass | 0.15g | |

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



Product Search Data Sheet




TZW4Z1R5A001R00

Product Data

Note: This datasheet may be out of date. Please download the latest datasheet of TZW4Z1R5A001R00 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=TZW4Z1R5A001R00

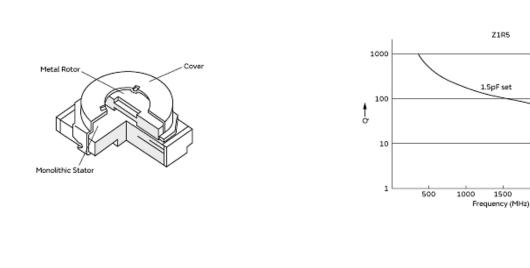




Z1R5

1500

2000

2500

3000

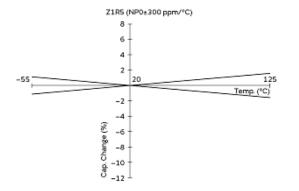

Constructions

Temp. Coeff. Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

