

Note: This datasheet may be out of date

Please download the latest datasheet of LQM21PN1R0MC0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQM21PN1R0MC0%23

"#"at the end indicates the package specification code.

Size Code 2012 (0805) in mm (in inch), 0.55mm max. Thickness















< List of part numbers with package codes > LQM21PN1R0MC0B LQM21PN1R0MC0D




Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Consumer equipment,Medical
	equipment [GHTF A/B/C] except for
	implant & surgery & auto injector,
	Industrial equipment except for
	transportation & facility & energy
	equipment
Specific	Please refer to Our Website and
Applications	specifications, etc. for information about
	the performance, functions, quality,
	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.
Recommended	Consumon antimosom
Applications	Consumer equipment



Appearance & Shape

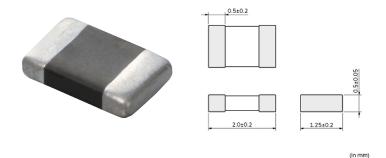



Notices

Please consider 'Notice (Rating).' When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.

1 of 6

Attentior

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQM21PN1R0MC0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQM21PN1R0MC0%23

"#"at the end indicates the package specification code.



References

Packaging	Specifications	Standard Packing Quantity
В	Bulk(Bag)	1000
D	180mm Paper Tape	4000

1	Mass (typ.)	
ſ.	1 piece	0.007g

2 of 6

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQM21PN1R0MC0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQM21PN1R0MC0%23

"#"at the end indicates the package specification code.



Specifications

L size	2.0±0.2mm
W size	1.25±0.2mm
T size	0.5±0.05mm
Size code inch (mm)	0805 (2012)
Inductance	1µH±20%
Inductance Test Frequency	1MHz
Rated current (Itemp)	0.8A(Ambient temp.85°C)0.
(Based on Temperature rise)	60A(Ambient temp.125°C)
Max. of DC resistance	0.238Ω
DC resistance	0.19Ω±25%
Class of magnetic shield	Shielded (Ferrite Core)
Self resonance frequency (min.)	90MHz
Brand	Murata
Operating Temperature Range	-55°C to 125°C
Series	LQM21PN_C0

3 of 6

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date.

Please download the latest datasheet of LQM21PN1R0MC0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQM21PN1R0MC0%23


"#"at the end indicates the package specification code.



Notice For General

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current



4 of 6

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.



Note: This datasheet may be out of date.


Please download the latest datasheet of LQM21PN1R0MC0# from the official website of Murata Manufacturing Co., Ltd.


"#"at the end indicates the package specification code.





Characteristic Data

The charts below may show another part number which shares its characteristics.









5 of 6

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.






Note: This datasheet may be out of date.

Please download the latest datasheet of LQM21PN1R0MC0# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en-gb/products/productdetail?partno=LQM21PN1R0MC0%23

"#"at the end indicates the package specification code.



LQM21PN1ROMCO Temp. rise

6 of 6

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

