

Product Search Data Sheet


CSTCE16M9V53C-R0

discontinued RoHS REACH

Applications

Unsuitable	Please be sure to read and comply with	
Applications	these "Precautions for use."	
Specific Applications	Automotive powertrain/safety equipment	
	Please refer to Our Website and	
	specifications, etc. for information about	
	the performance, functions, quality,	
	management, and safety required for	
	the above applications, and use	
	Products after confirming the	
	performance and reliability of the actual	
	Product.	

Appearance & Shape

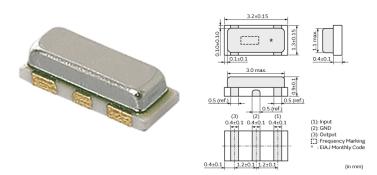

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of CSTCE16M9V53C-R0 from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=CSTCE16M9V53C-R0

Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000



MURATA's package technology expertise has enabled the development of the Chip CERALOCK.

This diverse series owes its development to MURATA's original mass production techniques and high reliability, and has achieved importance in the worldwide automotive market.

Features

- 1. High reliability and available for a wide temperature range.
- 2. Oscillation circuits do not require external load capacitors.
- 3. Available for a wide frequency range.
- 4. Extremely small and have a low profile.
- 5. No adjustment is necessary for oscillation circuits.

1 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

- without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering





CSTCE16M9V53C-R0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of CSTCE16M9V53C-R0 from the official website of Murata

http://www.murata.com/en/products/productdetail?partno=CSTCE16M9V53C-R0



Ceramic Resonator Product Type (CERALOCK) CSTCE_V_C Series Frequency 16.934MHz Frequency Tolerance +/-0.50% max. **Operating Temperature** -40°C~125°C Range Frequency Shift by +/-0.15% max. Temperature Frequency Aging +/-0.10% max. Resonant Impedance (R1) 40ohm max. Built-in Load Capacitance 15pF (CL1/CL2) Shape SMD Wash available L x W (size) 3.2x1.3mm Mass 17mg

2 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

